



TECHNICAL DATA AGRICULTURAL TYRES



VREDESTEIN
TYRES

	GENERAL	2-7
	Contents	2
	Sizes and pages	4
	Vredestein Traxion concept	6
	DLG recognition	8
	TRACTOR TYRES	11-100
	Radial tractor tyre conversion table	12
	DRIVE RADIAL	
	Traxion Optimall	14
	TraxionXXL	30
	Traxion 65	42
	Traxion 70	54
	Traxion 85 II	70
	DRIVE BIAS	
	Faktor-S	88
	FRONT	
	Lug Ring	94
	Faktor-F	97
	HARVESTER TYRES	101-117
	DRIVE WHEEL	
	Traxion Harvest	102
	Traxion Optimall	108
	TraxionXXL	109
	STEERING WHEEL	
	Traxion Harvest	110
	Traxion Versa	116
	TraxionXXL / Traxion 65	117
	AGRI INDUSTRIAL TYRES	119-135
	SOFT SURFACE	
	Traxion Versa Green	120
	Traxion Versa	122
	HARD SURFACE	
	Endurion	128
	TRAILER AND IMPLEMENT TYRES	137-207
	Radial implement tyre conversion table	138
	RADIAL	
	Endurion Trailer	141
	Flotation Optimall	146
	Flotation Trac	152
	Flotation Pro	172
	BIAS	
	Flotation+	180
	AW	192
	AS	202
	V61	206

 SMALL TYRES	209-241
AGRICULTURAL	
V50	210
V60	211
V61	211
V64	212
V64+	212
V67	212
LAWN- AND GROUNDSCAPE	
Greentrax	220
V71	221
V88	221
UTILITY	
V20	226
V25	226
V40	227
V52	227
V76	228
FAST TRAILER	
V47	234
V48	234
V49	235
V54	235
V71	236
 TECHNICAL INFORMATION AND TUBES	242-260
General texts for the graphs and tables	243
Service description	243
Instructions for use of load capacity graphs	244
Tubes	246
Valves	247
Rim and wheel discs	248
Recommendations to extend the life-span	250
Determining gear ratio, rolling circumference and front wheel lead	252
Fitting instructions	255
Weight transfer	256
Names	256
General remarks	260
Symbols and abbreviations	260

GENERAL



TRACTOR TYRES



HARVESTER TYRES



AGRI INDUSTRIAL TYRES



TRAILER AND IMPLEMENT TYRES



SMALL TYRES



TECHNICAL INFORMATION AND TUBES



SIZES AND PAGES

TRACTOR TYRES				HARVESTER TYRES	
		DRIVE RADIAL		DRIVE AXLE	
Traxion Optmall		Traxion 65	Traxion 85 II	Traxion HARVEST	
VF 540/65 R 28 NRO	16	540/65 R 30	49	340/85 R 38	83
VF 600/60 R 28 NRO	16	540/65 R 34	50	380/80 R 38	83
VF 600/65 R 28 NRO	17	540/65 R 34	50	420/85 R 38	84
VF 540/65 R 30 NRO	17	600/65 R 34	51	460/85 R 38	84
VF 600/60 R 30 NRO	18	540/65 R 38	51	520/85 R 38	85
VF 600/70 R 30 NRO	18	600/65 R 38	52	480/80 R 42	85
VF 620/75 R 30	19	650/65 R 38	52	520/85 R 42	86
VF 710/55 R 30 NRO	19	650/65 R 42	53	480/80 R 46	86
VF 600/70 R 34 NRO	20	Traxion 70		520/85 R 46	87
VF 650/60 R 34 NRO	20	240/70 R 16	56	480/80 R 50	87
VF 650/65 R 34 NRO	21	260/70 R 16	56	DRIVE BIAS	
VF 710/60 R 34 NRO	21	280/70 R 16	57	Faktor-S	
VF 650/60 R 38 NRO	22	280/70 R 18	57	9.5 - 24	90
VF 650/65 R 38 NRO	22	260/70 R 20	58	11.2 - 24	90
VF 650/85 R 38	23	280/70 R 20	58	12.4 - 24	90
VF 710/60 R 38 NRO	23	300/70 R 20	59	13.6 - 24	90
VF 710/70 R 38 NRO	24	320/70 R 20	59	14.9 - 24	90
VF 800/70 R 38	24	360/70 R 20	60	11.2 - 28	91
VF 650/65 R 42 NRO	25	380/70 R 20	60	12.4 - 28	91
VF 650/85 R 42	25	320/70 R 24	61	13.6 - 28	91
VF 710/60 R 42 NRO	26	360/70 R 24	61	14.9 - 28	91
VF 710/70 R 42	26	380/70 R 24	62	16.9 - 28	91
VF 710/75 R 42	27	420/70 R 24	62	16.9 - 30	92
VF 800/70 R 42	27	480/70 R 24	63	18.4 - 30	92
VF 900/50 R 42 NRO	28	380/70 R 28	63	12.4 - 32	92
VF 900/60 R 42 NRO	28	420/70 R 28	64	16.9 - 34	92
VF 750/70 R 44	29	480/70 R 28	64	18.4 - 34	92
TraxionXXL		480/70 R 30	65	FRONT	
540/75 R 28	32	480/70 R 34	65	Lug Ring	
600/65 R 28	32	520/70 R 34	66	5.50 - 16	95
600/65 R 28	33	480/70 R 38	66	6.00 - 16	95
600/70 R 28	33	520/70 R 38	67	6.50 - 16	95
600/70 R 30	34	580/70 R 38	67	7.50 - 16	95
710/60 R 30	34	620/70 R 42	68	7.50 - 18	95
800/65 R 32	35	Traxion 85 II		6.00 - 19	96
600/70 R 34	35	210/95 R 16	72	Faktor-F	
650/75 R 38	36	210/95 R 18	72	5.00 - 15	98
650/85 R 38	36	280/85 R 20	73	11.5/80 - 15.3	98
710/70 R 38	37	320/85 R 20	73	5.50 - 16	98
710/70 R 38	37	280/85 R 24	74	6.00 - 16	98
710/75 R 38	38	280/85 R 24	74	6.50 - 16	98
800/70 R 38	38	320/85 R 24	75	7.50 - 16	99
900/60 R 38	39	340/85 R 24	75	9.00 - 16	99
710/70 R 42	39	380/85 R 24	76	10.00 - 16	99
710/75 R 42	40	420/85 R 24	76	11.00 - 16	99
Traxion 65		280/85 R 28	77	7.50 - 18	99
320/65 R 16	44	320/85 R 28	77	4.00 - 19	100
320/65 R 18	44	340/85 R 28	78	7.50 - 20	100
340/65 R 18	45	380/85 R 28	78		
420/65 R 20	45	380/85 R 28	79		
440/65 R 24	46	420/85 R 28	79		
480/65 R 24	46	380/85 R 30	80		
540/65 R 24	47	420/85 R 30	80		
440/65 R 28	47	460/85 R 30	81		
480/65 R 28	48	380/85 R 34	81		
540/65 R 28	48	420/85 R 34	82		
540/65 R 30	49	460/85 R 34	82		

TRAILER AND IMPLEMENT TYRES

RADIAL		
Endurion Trailer		Flotation Trac
560/60 R 22.5 IMP	142	800/40 R 22.5 IMP 161
600/50 R 22.5 IMP	142	710/65 R 26 IMP 162
600/55 R 26.5 IMP	143	600/55 R 26.5 IMP 162
650/55 R 26.5 IMP	143	650/55 R 26.5 IMP 163
650/60 R 26.5 IMP	144	650/65 R 26.5 IMP 163
650/65 R 26.5 IMP	144	710/50 R 26.5 IMP 164
600/60 R 30.5 IMP	145	750/45 R 26.5 IMP 164
Flotation Optimall		
VF 710/45 R 22.5 IMP	147	800/45 R 26.5 IMP 165
VF 600/55 R 26.5 IMP	147	600/60 R 30.5 IMP 165
VF 710/50 R 26.5 IMP	148	650/65 R 30.5 IMP 166
VF 750/45 R 26.5 IMP	148	710/50 R 30.5 IMP 166
VF 800/45 R 26.5 IMP	149	750/60 R 30.5 IMP 167
VF 710/50 R 30.5 IMP	149	800/45 R 30.5 IMP 167
VF 750/60 R 30.5 IMP	150	850/50 R 30.5 IMP 168
VF 800/45 R 26.5 IMP	150	800/60 R 32 IMP 168
VF 800/60 R 32 IMP	151	900/65 R 32 IMP 169
Flotation Trac		
480/45 R 17 IMP	154	800/60 R 38 IMP 170
Flotation Pro		
520/50 R 17 IMP	154	560/45 R 22.5 IMP 174
500/45 R 22.5 IMP	155	560/60 R 22.5 IMP 174
520/55 R 22.5 IMP	155, 156	620/40 R 22.5 IMP 175, 176
560/45 R 22.5 IMP	156, 157	620/50 R 22.5 IMP 176, 177
560/60 R 22.5 IMP	157, 158	650/50 R 22.5 IMP 177
580/65 R 22.5 IMP	158	710/40 R 22.5 IMP 178
600/50 R 22.5 IMP	159	620/55 R 26.5 IMP 178
650/40 R 22.5 IMP	159	710/50 R 26.5 IMP 179
680/50 R 22.5 IMP	160	800/45 R 26.5 IMP 179
710/40 R 22.5 IMP	160	
710/45 R 22.5 IMP	161	

BIAS

Flotation+		AW
260/70 - 15.3 IMP	182	7.00 - 12 IMP 194
300/80 - 15.3 IMP	183	10.0/80 - 12 IMP 194
400/60 - 15.5 IMP	184	10.0/75 - 15.3 IMP 195
340/55 - 16 IMP	184	11.5/80 - 15.3 IMP 196
380/55 - 17 IMP	185	12.5/80 - 15.3 IMP 197
480/45 - 17 IMP	186	13.0/75 - 16 IMP 197
500/50 - 17 IMP	187	13.5/75 - 430.9 IMP 198
400/70 - 20 IMP	188	15.0/55 - 17 IMP 198
460/65 - 20 IMP	188	19.0/45 - 17 IMP 199
500/55 - 20 IMP	189	500/50 - 17 IMP 199
560/60 - 22.5 IMP	189	12.5/80 - 18 IMP 200
600/55 - 22.5 IMP	190	15.0/70 - 18 IMP 200
710/45 - 22.5 IMP	190	
AS+		
		7.00 - 12 IMP 204
		10.0/75 - 15.3 IMP 204
		11.5/80 - 15.3 IMP 205
		15.0/55 - 17 IMP 205
V61		
		200/60 - 14.5 IMP 207
		250/65 - 14.5 IMP 207

AGRI INDUSTRIAL TYRES

SOFT SURFACE Traxion VERSA GREEN		HARD SURFACE Endurion
440/50 R 17 IMP	121	340/80 R 18 IND 130
Traxion VERSA		
340/80 R 18 IND	124	400/70 R 18 IND 130
400/70 R 20 IND	124	340/80 R 20 IND 131
400/70 R 24 IND	125	400/70 R 20 IND 131
400/80 R 24 IND	125	400/70 R 24 IND 132
460/70 R 24 IND	126	400/80 R 24 IND 132
500/70 R 24 IND	126	460/70 R 24 IND 133
480/80 R 26 IND	127	500/70 R 24 IND 133
440/80 R 28 IND	127	480/80 R 26 IND 134
		440/80 R 28 IND 134

SMALL TYRES

AGRICULTURAL		UTILITY
V50, V60, V61 V64, V64+, V67		V20, V25, V40 V52, V76
3.00 - 4	214, 217	200x 50 230
4.00 - 4	214, 217	260x 85 230, 232
3.50 - 6	214, 216, 218	4.10 / 3.50 - 4 232, 233
15x 6.00 - 6	215	4.00 - 4 230, 232, 233
160/65 - 6	216	3.50 - 6 230
3.50 - 8	215, 216, 218	2.25 - 8 230
4.00 - 8	215, 218	4.00 - 8 230, 231
5.00 - 8	214	4.80 / 4.00 - 8 233
170/60 - 8	215, 217	5.00 - 8 231
18x 8.50 - 8	215, 216	6.00 - 9 231, 232
210/60 - 8	217	
6.00 - 9	214	
4.00 - 12	218	

LAWN- AND GROUNDS CARE

Greentrax V71, V88		FAST TRAILER V47, V48, V49 V54, V71
160/65 - 6 IMP	223	3.50 - 8 237
170/60 - 8 IMP	223, 225	4.00 - 8 238, 240, 241
18x 8.50 - 8	225	4.80 - 8 239
210/60 - 8 IMP	223	5.00 - 8 238, 240
250/50 - 8 IMP	223	5.70 - 8 240
250/60 - 8 IMP	223	16.5x 6.50 - 8 241
210/60 - 10 IMP	224	18.5x 8.50 - 8 239
250/50 - 10 IMP	224	6.00 - 9 241
270/50 - 12 IMP	224	5.00 - 10 238, 239
320/45 - 12 IMP	224	18x 8.0 - 10 239
320/55 - 12 IMP	224	20.5x 8.0 - 10 239

VREDESTEIN TRAXION CONCEPT

**HIGHEST TRACTION
MAXIMUM COMFORT—
LONGEST LIFE ———**



BENEFITS TRACTION ZONE

Transverse lugs and open space between lugs leading to:

- maximum traction (*DLG test 2017)
- less fuel consumption during traction activities (*DLG test 2017)



NON-PARALLEL LUGS

Unique non-parallel lugs, with increasing gap from the centre to the shoulder, to easily push out the soil. This enhanced self-cleaning ensures the tyre keeps the traction, which leads to optimum productivity.

MORE RUBBER IN THE CENTRE

30% more lug area in the centre for continuous road contact leading to a smooth ride and extremely high wear resistance (*DLG test 2019).

TRANSVERSE LUGS

12% more open space between lugs and an 48% more transverse lug in the shoulder to generate maximum pulling force for uncompromised traction.

BENEFITS COMFORT ZONE

Rubber in driving direction for continuous road contact leading to:

- excellent driving comfort
- extremely high wear resistance that leads to the long tyre life (*DLG test 2019)
- side grip for stable driving behaviour on slopes

Vredestein traxion profile



Competition profile



About DLG

The DLG (Deutsche Landwirtschafts Gesellschaft) Test Centre in Groß Umstadt, near Frankfurt, is the benchmark for certified agricultural technology and equipment, and is a leader in testing and certification in agriculture (as well as food products). Using modern measuring technologies and testing methods that closely resemble the situation in the field, DLG engineers test new products on a daily basis. The measurements are based on international standards as well as testing methods based on practical requirements developed by DLG.



MORE HOURS, ALWAYS

DLG APPROVED



VREDESTEIN TRAXION XXL

✓ Wear behaviour under real conditions



DLG Test Report 7026

2019 | Traxion XXL | Longer service life and save €1 per hour of operation

In this test, the Vredestein Traxion XXL was compared to similar tyres from another manufacturer of premium tyres. The tyre sizes tested were the 600/70 R28 on the front axle and the 710/70 R42 on the rear axle, across six identical John Deere 6215R tractors. The Vredestein tyres demonstrated a longer service life and a lower cost per operating hour.


DETERMINED LIFETIME IN COMPARISON

When the costs for a tyre set are entered, it is possible to show the economic effect. The price for a tyre set depends on the dealer and his trading terms. In this case we determined a price of € 11,000 for an average on both test candidates.



COMPARISON OF COSTS WITH A PURCHASE PRICE OF € 11,000

	Vredestein Traxion XXL		Reference	
	FA	RA	FA	RA
Purchase price per axle (€)	3500	7500	3500	7500
Costs per tyre per operation hour (€/h)	0,27	0,54	0,51	0,82
Costs per axle per operation hour (€/h)	0,54	1,08	1,01	1,63



SOIL PRESERVATION, ALWAYS


DLG APPROVED



2023 | VF Flotation Optimall | 25% less ground pressure & 3l/h fuel savings


DLG tested the Vredestein VF Flotation Optimall in the tyre size 750/60 R30.5 against competing (premium) tyre manufacturers and came out as the test winner with the best overall score in terms of soil preservation and fuel savings of an average of 3 litres of fuel per running hour.

FOOTPRINT AND TRACK DEPTH COMPARISON

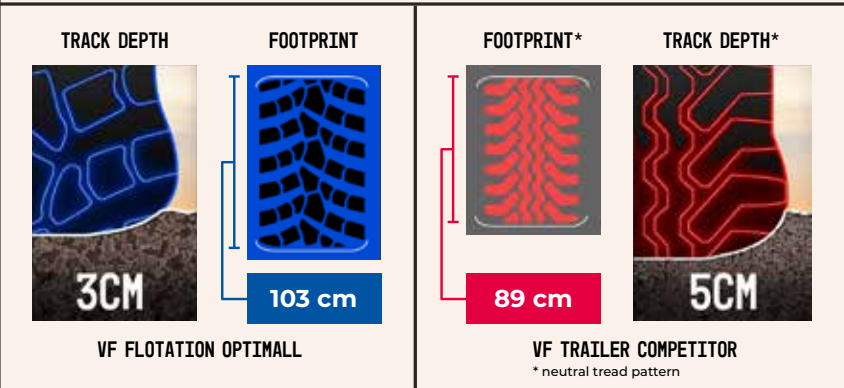

According to tests conducted by DLG in the field, compared to VF competitor tyre. Tyres tested VF 750/60 R 30.5 with 7100 kg load and tyre pressure adjusted for max 10 km/h field work (1.0 bar).

FUEL SAVINGS (€)

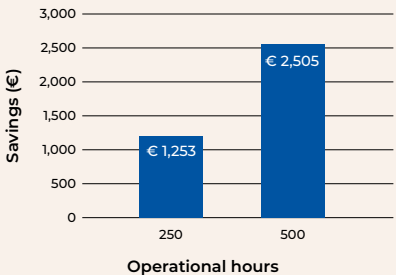

According to tests conducted by DLG in the field, 3L/H fuel savings compared to VF competitor tyre. Assumption: Diesel price 1.67 €/litre



MORE TRACTION
— **ALWAYS**

TRAXION OPTIMALL

REDESTEIN
TYRES



TRACTOR TYRES

	Pag.
Radial tractor tyre conversion table	12
DRIVE RADIAL	
Traxion Optimall	14
TraxionXXL	30
Traxion 65	42
Traxion 70	54
Traxion 85	70
DRIVE BIAS	
Faktor-S	88
FRONT	
Lug Ring	94
Faktor-F	97



RADIAL TRACTOR TYRE CONVERSION TABLE

Overall diameter range (mm)	SRI	Standard Traxion 85 II		Low profile Traxion 70	Low profile Traxion 65	Extra wide TraxionXXL Traxion Harvest	Extra wide VF Traxion Optimal
		Imperial	85-series	70-series	65-series	XL-series	XL-series VF
735	350			240/70 R 16			
765	370			260/70 R 16			
800	380	7.50 R 16	210/95 R 16				
820	390			280/70 R 16	320/65 R 16		
855	410	7.50 R 18	210/95 R 18	280/70 R 18			
875	425			260/70 R 20	320/65 R 18		
905	425				340/65 R 18		
	450			280/70 R 20			
945	450			300/70 R 20			
985	475	11.2 R 20	280/85 R 20	320/70 R 20			
1050	500	12.4 R 20	320/85 R 20	360/70 R 20	420/65 R 20		
1090	525			380/70 R 20			
		11.2 R 24	280/85 R 24	320/70 R 24			
1145	550	12.4 R 24	320/85 R 24	360/70 R 24			
1190	575	11.2 R 28	280/85 R 28				
		13.6 R 24	340/85 R 24	380/70 R 24	440/65 R 24		
1245	600	12.4 R 28	320/85 R 28				
		14.9 R 24	380/85 R 24	420/70 R 24	480/65 R 24		
1295	625	13.6 R 28	340/85 R 28	380/70 R 28	440/65 R 28		
1320	625	16.9 R 24	420/85 R 24	480/70 R 24	540/65 R 24		
1350	650	14.9 R 28	380/85 R 28	420/70 R 28	480/65 R 28		
1420	675	16.9 R 28	420/85 R 28	480/70 R 28	540/65 R 28		VF 540/65 R 28
		14.9 R 30	380/85 R 30				VF 600/60 R 28
1475	700	16.9 R 30	420/85 R 30	480/70 R 30	540/65 R 30	540/75 R 28	VF 600/65 R 28
						600/65 R 28	VF 540/65 R 30
1525	725						VF 600/60 R 30
		18.4 R 30	460/85 R 30			600/70 R 28	VF 710/55 R 30
1550	750	14.9 R 34	380/85 R 34				
		13.6 R 38	340/85 R 38				
1575	750	16.9 R 34	420/85 R 34	480/70 R 34	540/65 R 34	620/75 R 26	
		13.6 R 38	380/80 R 38			600/70 R 30	VF 600/70 R 30
1645	775					710/60 R 30	
		18.4 R 34	460/85 R 34	520/70 R 34	600/65 R 34		VF 650/60 R 34
1675	800	16.9 R 38	420/85 R 38	480/70 R 38	540/65 R 38	600/70 R 34	VF 620/75 R 30
							VF 600/70 R 34
1750	825	18.4 R 38	460/85 R 38	520/70 R 38	600/65 R 38		VF 650/65 R 34
							VF 710/60 R 34
1800	850						VF 650/60 R 38
						650/75 R 32	
1835	875	20.8 R 38	520/85 R 38	580/70 R 38	650/65 R 38	800/65 R 32	VF 650/65 R 38
		18.4 R 42	480/80 R 42				VF 710/60 R 38
1900	900					800/70 R 32	
						900/60 R 32	
1935	925	20.8 R 42	520/85 R 42	620/70 R 42	650/65 R 42	680/85 R 32	VF 710/70 R 38
			480/80 R 46			650/75 R 38	VF 650/65 R 42
2000	950					710/70 R 38	VF 710/60 R 42
						710/75 R 38	VF 900/50 R 42
2050	975	20.8 R 46	520/85 R 46			650/85 R 38	VF 650/85 R 38
			480/80 R 50			800/70 R 38	VF 800/70 R 38
2150	1000					900/60 R 38	VF 710/70 R 42
						710/70 R 42	
2150	1025					710/75 R 42	VF 710/75 R 42
							VF 650/85 R 42
2200	1025						VF 800/70 R 42
							VF 900/60 R 42
							VF 750/70 R 44

This table provides a full overview of tyres for Tractors, that are comparable in terms of external overall diameter but have different widths.

The classification of the tyres into overall diameter ranges is indicative and complies with ETRTO guidelines. When changing tyres, we advise you to check the exact overall diameter and rolling circumference. This information is provided in the technical data for each tyre. We advise you to recalculate the front wheel lead each time the tyre is changed.

The Traxion 70 and Traxion 65 tyres in the “low profile” category are wider tyres with the same rim overall diameter as the standard Traxion 85. The large volume TraxionXXL tyres have a similar external overall diameter in combination with a smaller rim overall diameter, which significantly increases the load capacity of the tyres. We recommend that you check the permitted rim width in the technical data for each tyre.



TRAXION OPTIMALL



TRAXION XXL



TRAXION 65



TRAXION 70



TRAXION 85 II



TRACTOR TYRES – DRIVE RADIAL



TRAXION OPTIMALL

THE NEXT GENERATION VF TYRE

FEATURES

Innovative carcass construction enabling up to 25% lower inflation pressure in the field

Traxion concept with unique tread compound and high rubber content for 30% better wear resistance

10% higher radial stiffness**

BENEFITS

7%* higher productivity and 7%* lower fuel consumption
15%** larger footprint for less soil compaction and higher yield

30% longer life***

Maximum stability at heavy road transport

* According to tests conducted by DLG, compared to premium European IF competitor tyre.

** According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.

*** According to Vredestein R&D compared to premium European IF and VF competitor tyres.



TRAXION OPTIMALL

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.	
28	VF 540/65 R 28 NRO	149 D	1,6	DW18L	545	1410	620	4120	16	N
	VF 600/60 R 28 NRO	160 D	2,0	DW20B	605	1420	605	4180	16	
	VF 600/65 R 28 NRO	163 D	2,0	DW21B	605	1490	645	4375	17	
30	VF 540/65 R 30 NRO	158 D	2,0	DW18L	545	1480	650	4360	17	N
	VF 600/60 R 30 NRO	162 D	2,0	DW20B	600	1480	655	4390	18	
	VF 600/70 R 30 NRO	168 D	2,0	DW21B	620	1590	695	4675	18	
	VF 620/75 R 30	172 D	2,0	DW23B	665	1665	725	4920	19	
	VF 710/55 R 30 NRO	165 D	1,6	DW23B	715	1530	675	4510	19	
34	VF 600/70 R 34 NRO	170 D	2,0	DW21B	605	1695	735	5015	20	N
	VF 650/60 R 34 NRO	168 D	2,0	DW23B	670	1660	750	4935	20	
	VF 650/65 R 34 NRO	170 D	2,0	DW23B	655	1715	775	5100	21	
	VF 710/60 R 34 NRO	173 D	2,0	DW25B	705	1705	780	5080	21	
38	VF 650/60 R 38 NRO	170 D	2,0	DW23B	665	1745	770	5175	22	N
	VF 650/65 R 38 NRO	169 D	1,6	DW23B	665	1835	800	5400	22	
	VF 650/85 R 38	182 D	2,0	DW23B	680	2065	885	6070	23	
	VF 710/60 R 38 NRO	174 D	2,0	DW25B	725	1840	810	5430	23	
	VF 710/70 R 38 NRO	181 D	2,0	DW25B	735	1945	840	5720	24	
	VF 800/70 R 38	187 D	2,0	DW27B	805	2060	900	6100	24	
42	VF 650/65 R 42 NRO	174 D	2,0	DW23B	665	1925	845	5690	25	N
	VF 650/85 R 42	183 D	2,0	DW23B	665	2165	935	6380	25	
	VF 710/60 R 42 NRO	176 D	2,0	DW25B	730	1925	850	5710	26	
	VF 710/70 R 42	182 D	2,0	DW25B	730	2060	910	6110	26	
	VF 710/75 R 42	184 D	2,0	DW25B	730	2160	965	6390	27	
	VF 800/70 R 42	189 D	2,0	DW27B	800	2165	930	6380	27	
	VF 900/50 R 42 NRO	180 D	1,6	DW30B	885	1975	865	5820	28	
	VF 900/60 R 42 NRO	189 D	2,0	DW30B	875	2145	920	6315	28	
44	VF 750/70 R 44	186 D	2,0	DW25B	760	2185	940	6500	29	N

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 540/65 R 28 NRO 154 D TL Traxion Optimal

EAN		8714692805615			Section width			545 mm		
Nominal tyre pressure		1,6 bar			Overall diameter			1410 mm		
Tyre construction		Radial			Static loaded radius			620 mm		
Recommended rim width		DW18L			Rolling circumference			4120 mm		
Permitted rim width		DW16L (NRO)			SRI			675		
					Tread depth			46 mm		
					75% of the tyre volume			285 l		
		Tyre pressure (bar)								
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10L	2410	2785	3135	3510	3880	4230	4605	4810	
	10H	2275	2650	3030	3410	3790	4050			
	25	2295	2675	3060	3440	3825	4090			
	30	2275	2650	3030	3410	3790	4050			
	40	2210	2580	2945	3315	3685	3940			
	50	2170	2530	2890	3250	3615	3865			
	65	2105	2455	2805	3155	3510	3750			
	70	1915	2235	2555	2875	3190	3415			

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 600/60 R 28 NRO 160 D TL Traxion Optimal

EAN		8714692805622				Section width		605 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1420 mm			
Tyre construction		Radial				Static loaded radius		620 mm			
Recommended rim width		DW20L				Rolling circumference		4180 mm			
Permitted rim width		DW21B, DW18L(NRO)				SRI		675			
						Tread depth		48 mm			
						75% of the tyre volume		388 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	2570	2965	3340	3735	4135	4670	4905	5275	5480	5625
	10H	2420	2825	3230	3630	4035	4455	4695	4860		
	25	2445	2850	3255	3665	4070	4495	4740	4905		
	30	2420	2825	3230	3630	4035	4455	4695	4860		
	40	2355	2745	3140	3530	3920	4330	4565	4725		
	50	2310	2695	3080	3465	3850	4250	4475	4635		
	65	2240	2615	2990	3360	3735	4125	4345	4500		
	70	2040	2380	2720	3060	3400	3755	3955	4095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 600/65 R 28 NRO 163 D TL Traxion Optimall

EAN		8714692805639				Section width				605 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1490 mm	
Tyre construction		Radial				Static loaded radius				645 mm	
Recommended rim width		DW20L				Rolling circumference				4375 mm	
Permitted rim width		DW21B, DW18L(NRO)				SRI				700	
						Tread depth				50 mm	
						75% of the tyre volume				441 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	2845	3280	3695	4135	4575	4990	5430	5670	5885	6095
	10H	2680	3125	3575	4020	4465	4725	5045	5265		
	25	2705	3155	3605	4055	4505	4770	5090	5315		
	30	2680	3125	3575	4020	4465	4725	5045	5265		
	40	2605	3040	3475	3910	4340	4595	4905	5120		
	50	2555	2980	3405	3835	4260	4505	4810	5020		
	65	2480	2895	3310	3720	4135	4375	4670	4875		
	70	2260	2635	3010	3385	3765	3980	4250	4435		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 540/65 R 30 NRO 158 D TL Traxion Optimall

EAN		8714692362255				Section width				545 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1480 mm	
Tyre construction		Radial				Static loaded radius				650 mm	
Recommended rim width		DW18L				Rolling circumference				4360 mm	
Permitted rim width		W18L, DW16L (NRO)				SRI				700	
						Tread depth				47 mm	
						75% of the tyre volume				363 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	2490	2875	3235	3620	4005	4365	4750	4960	5150	5315
	10H	2345	2735	3125	3520	3910	4185	4415	4590		
	25	2365	2760	3155	3550	3945	4225	4455	4635		
	30	2345	2735	3125	3520	3910	4185	4415	4590		
	40	2280	2660	3040	3420	3800	4070	4290	4465		
	50	2235	2610	2980	3355	3730	3990	4210	4380		
	65	2170	2535	2895	3255	3620	3875	4085	4250		
	70	1975	2305	2635	2965	3295	3525	3720	3870		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 600/60 R 30 NRO 162 D TL Traxion Optimal

EAN		8714692362262				Section width		600 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1480 mm			
Tyre construction		Radial				Static loaded radius		655 mm			
Recommended rim width		DW20B				Rolling circumference		4390 mm			
Permitted rim width		DW21B, DW18L (NRO)				SRI		700			
						Tread depth		48 mm			
						75% of the tyre volume		411 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	2650	3060	3445	3855	4260	4815	5055	5445	5650	5940
	10H	2495	2915	3330	3745	4160	4590	4840	5130		
	25	2520	2940	3360	3780	4200	4635	4885	5180		
	30	2495	2915	3330	3745	4160	4590	4840	5130		
	40	2425	2830	3235	3640	4045	4465	4705	4990		
	50	2380	2780	3175	3570	3970	4380	4620	4895		
	65	2310	2695	3080	3470	3855	4250	4485	4750		
	70	2105	2455	2805	3155	3505	3870	4080	4325		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 600/70 R 30 NRO 168 D TL Traxion Optimal

EAN		8714692350658				Section width				620 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1590 mm	
Tyre construction		Radial				Static loaded radius				695 mm	
Recommended rim width		DW21B				Rolling circumference				4675 mm	
Permitted rim width		W/DW18L (NRO), DW20B				SRI				750	
						Tread depth				54 mm	
						75% of the tyre volume				384 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3225	3720	4190	4690	5185	5655	6155	6575	6795	7000
	10H	3040	3545	4050	4555	5065	5560	5860	6050		
	25	3065	3575	4090	4600	5110	5615	5915	6105		
	30	3040	3545	4050	4555	5065	5560	5860	6050		
	40	2955	3445	3940	4430	4925	5410	5695	5880		
	50	2900	3380	3865	4345	4830	5305	5590	5770		
	65	2815	3280	3750	4220	4690	5150	5425	5600		
	70	2560	2985	3415	3840	4265	4685	4935	5095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 620/75 R 30 172 D TL Traxion Optimall

EAN		8714692350672				Section width				665 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1665 mm	
Tyre construction		Radial				Static loaded radius				725 mm	
Recommended rim width		DW23B				Rolling circumference				4920 mm	
Permitted rim width		DW20B, DW21B				SRI				800	
						Tread depth				56 mm	
						75% of the tyre volume				509 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3615	4175	4700	5260	5815	6345	6900	7375	7620	7875
	10H	3405	3975	4545	5110	5680	6265	6570	6805		
	25	3440	4010	4585	5160	5730	6320	6630	6865		
	30	3405	3975	4545	5110	5680	6265	6570	6805		
	40	3315	3865	4415	4970	5520	6090	6390	6615		
	50	3250	3790	4335	4875	5415	5975	6265	6490		
	65	3155	3680	4205	4730	5260	5800	6085	6300		
	70	2870	3350	3830	4305	4785	5280	5535	5735		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 710/55 R 30 NRO 165 D TL Traxion Optimall

EAN				8714692805646		Section width				715 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1530 mm							
Tyre construction				Radial		Static loaded radius				675 mm							
Recommended rim width				DW25B		Rolling circumference				4510 mm							
Permitted rim width				DW23B (NRO)		SRI				725							
						Tread depth				55 mm							
						75% of the tyre volume				531 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	3185	3675	4140	4635	5125	5790	6080	6545								
	10H	3000	3500	4005	4505	5005	5560										
	25	3030	3535	4040	4545	5050	5615										
	30	3000	3500	4005	4505	5005	5560										
	40	2920	3405	3890	4380	4865	5410										
	50	2865	3340	3815	4295	4770	5305										
	65	2780	3245	3705	4170	4635	5150										
	70	2530	2950	3375	3795	4215	4685										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 600/70 R 34 NRO 170 D TL Traxion Optimal

EAN		8714692360374				Section width		605 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1695 mm			
Tyre construction		Radial				Static loaded radius		735 mm			
Recommended rim width		DW21B				Rolling circumference		5015 mm			
Permitted rim width		W/DW18L (NRO), DW20B				SRI		800			
						Tread depth		55 mm			
						75% of the tyre volume		440 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3405	3930	4425	4955	5480	5975	6500	6950	7180	7500
	10H	3210	3745	4280	4815	5350	5885	6190	6480		
	25	3240	3780	4320	4860	5400	5940	6250	6540		
	30	3210	3745	4280	4815	5350	5885	6190	6480		
	40	3120	3640	4160	4680	5200	5725	6020	6300		
	50	3060	3570	4080	4590	5100	5615	5905	6180		
	65	2970	3470	3965	4460	4955	5450	5730	6000		
	70	2705	3155	3605	4055	4510	4960	5215	5460		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 650/60 R 34 NRO 168 D TL Traxion Optimal

EAN		8714692344848				Section width		670 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1660 mm			
Tyre construction		Radial				Static loaded radius		750 mm			
Recommended rim width		DW23B				Rolling circumference		4935 mm			
Permitted rim width		DW20B (NRO), DW21B				SRI		775			
						Tread depth		56 mm			
						75% of the tyre volume		457 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3175	3665	4125	4615	5105	5770	6060	6520	6770	7000
	10H	2990	3490	3990	4485	4985	5560	5800	6050		
	25	3020	3520	4025	4530	5030	5615	5855	6105		
	30	2990	3490	3990	4485	4985	5560	5800	6050		
	40	2910	3395	3875	4360	4845	5410	5640	5880		
	50	2855	3330	3805	4280	4755	5305	5530	5770		
	65	2770	3230	3695	4155	4615	5150	5370	5600		
	70	2520	2940	3360	3780	4200	4685	4890	5095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 650/65 R 34 NRO 170 D TL Traxion Optimall

EAN				8714692344862		Section width				655 mm	
Nominal tyre pressure				2,0 bar		Overall diameter				1715 mm	
Tyre construction				Radial		Static loaded radius				775 mm	
Recommended rim width				DW23B		Rolling circumference				5100 mm	
Permitted rim width				DW20B (NRO),		SRI				825	
				DW21B		Tread depth				56 mm	
						75% of the tyre volume				508 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3510	4050	4560	5105	5645	6155	6695	6995	7260	7500
	10H	3305	3860	4410	4960	5510	5885	6225	6480		
	25	3335	3895	4450	5005	5560	5940	6280	6540		
	30	3305	3860	4410	4960	5510	5885	6225	6480		
	40	3215	3750	4285	4820	5360	5725	6050	6300		
	50	3155	3680	4205	4730	5255	5615	5935	6180		
	65	3060	3570	4080	4590	5105	5450	5765	6000		
	70	2785	3250	3715	4180	4645	4960	5245	5460		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 710/60 R 34 NRO 173 D TL Traxion Optimall

EAN		8714692350696				Section width				705 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1705 mm	
Tyre construction		Radial				Static loaded radius				780 mm	
Recommended rim width		DW25B				Rolling circumference				5080 mm	
Permitted rim width		DW23B (NRO)				SRI				825	
						Tread depth				56 mm	
						75% of the tyre volume				539 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3640	4200	4730	5290	5855	6385	6945	7475	7760	8125
	10H	3430	4000	4570	5145	5715	6265	6650	7020		
	25	3460	4035	4615	5190	5770	6320	6710	7085		
	30	3430	4000	4570	5145	5715	6265	6650	7020		
	40	3335	3890	4445	5000	5555	6090	6465	6825		
	50	3270	3815	4360	4905	5450	5975	6340	6695		
	65	3175	3705	4235	4760	5290	5800	6155	6500		
	70	2890	3370	3850	4335	4815	5280	5605	5915		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 650/60 R 38 NRO 170 D TL Traxion Optimal

EAN		8714692805653				Section width		665 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1745 mm			
Tyre construction		Radial				Static loaded radius		770 mm			
Recommended rim width		DW23B				Rolling circumference		5175 mm			
Permitted rim width		DW21B,				SRI		825			
		DW20B (NRO)				Tread depth		58 mm			
						75% of the tyre volume		593 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3345	3860	4345	4860	5380	6075	6380	6870	7130	7500
	10H	3150	3675	4200	4725	5250	5725	6110	6480		
	25	3180	3710	4240	4770	5300	5775	6165	6540		
	30	3150	3675	4200	4725	5250	5725	6110	6480		
	40	3065	3575	4085	4595	5105	5565	5940	6300		
	50	3005	3505	4005	4505	5010	5460	5825	6180		
	65	2915	3405	3890	4375	4860	5300	5660	6000		
	70	2655	3095	3540	3980	4425	4825	5150	5460		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 650/65 R 38 NRO 169 D TL Traxion Optimal

EAN		8714692805660			Section width			665 mm		
Nominal tyre pressure		1,6 bar			Overall diameter			1835 mm		
Tyre construction		Radial			Static loaded radius			800 mm		
Recommended rim width		DW23B			Rolling circumference			5400 mm		
Permitted rim width		DW21B,			SRI			825		
		DW20B (NRO)			Tread depth			56 mm		
					75% of the tyre volume			575 l		
		Tyre pressure (bar)								
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10L	3690	4260	4800	5370	5940	6475	7045	7360	
	10H	3480	4060	4640	5220	5795	6265			
	25	3510	4095	4680	5265	5850	6320			
	30	3480	4060	4640	5220	5795	6265			
	40	3380	3945	4510	5075	5635	6090			
	50	3315	3870	4425	4975	5530	5975			
	65	3220	3760	4295	4830	5370	5800			
	70	2930	3420	3910	4395	4885	5280			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 650/85 R 38 182 D TL Traxion Optimall

EAN		8714692360398				Section width				680 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				2065 mm	
Tyre construction		Radial				Static loaded radius				885 mm	
Recommended rim width		DW23B				Rolling circumference				6070 mm	
Permitted rim width		DW20B, DW21B				SRI				975	
						Tread depth				61 mm	
						75% of the tyre volume				734 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	4820	5570	6270	7015	7760	8460	9205	9840	10165	10625
	10H	4545	5305	6060	6820	7575	8370	8765	9180		
	25	4585	5350	6115	6880	7645	8450	8845	9265		
	30	4545	5305	6060	6820	7575	8370	8765	9180		
	40	4420	5155	5890	6630	7365	8140	8520	8925		
	50	4335	5055	5780	6500	7225	7985	8360	8755		
	65	4210	4910	5610	6315	7015	7750	8115	8500		
	70	3830	4470	5105	5745	6385	7055	7385	7735		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 710/60 R 38 NRO 174 D TL Traxion Optimall

EAN			8714692805677			Section width			725 mm		
Nominal tyre pressure			2,0 bar			Overall diameter			1840 mm		
Tyre construction			Radial			Static loaded radius			810 mm		
Recommended rim width			DW25B			Rolling circumference			5430 mm		
Permitted rim width			DW23B (NRO)			SRI			875		
						Tread depth			57 mm		
						75% of the tyre volume			752 l		
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	3825	4420	4975	5565	6155	6955	7305	7865	8160	8375
	10H	3605	4210	4810	5410	6010	6640	6995	7235		
	25	3640	4245	4855	5460	6065	6705	7060	7305		
	30	3605	4210	4810	5410	6010	6640	6995	7235		
	40	3505	4090	4675	5260	5845	6460	6800	7035		
	50	3440	4015	4585	5160	5735	6335	6670	6900		
	65	3340	3895	4455	5010	5565	6150	6475	6700		
	70	3040	3545	4050	4560	5065	5595	5895	6095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 710/70 R 38 181 D TL Traxion Optimal

EAN		8714692805684				Section width				735 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				1945 mm	
Tyre construction		Radial				Static loaded radius				840 mm	
Recommended rim width		DW25B				Rolling circumference				5720 mm	
Permitted rim width		DW23B (NRO)				SRI				925	
						Tread depth				61 mm	
						75% of the tyre volume				865 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	4650	5370	6045	6765	7480	8155	8875	9485	9800	10315
	10H	4380	5115	5845	6575	7305	8100	8450	8910		
	25	4425	5160	5895	6635	7370	8175	8530	8995		
	30	4380	5115	5845	6575	7305	8100	8450	8910		
	40	4260	4970	5680	6390	7100	7875	8215	8665		
	50	4180	4875	5570	6270	6965	7725	8060	8500		
	65	4060	4735	5410	6085	6765	7500	7825	8250		
	70	3690	4310	4925	5540	6155	6825	7120	7510		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 800/70 R 38 187 D TL Traxion Optimal

EAN		8714692350733				Section width				805 mm	
Nominal tyre pressure		2,0 bar				Overall diameter				2060 mm	
Tyre construction		Radial				Static loaded radius				900 mm	
Recommended rim width		DW27B				Rolling circumference				6100 mm	
Permitted rim width		DW25B				SRI				975	
						Tread depth				62 mm	
						75% of the tyre volume				975 l	
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	5605	6475	7290	8155	9020	9835	10705	11440	11820	12190
	10H	5285	6165	7045	7925	8810	9720	10190	10530		
	25	5335	6220	7110	8000	8890	9810	10285	10630		
	30	5285	6165	7045	7925	8810	9720	10190	10530		
	40	5140	5995	6850	7705	8565	9450	9910	10240		
	50	5040	5880	6720	7560	8400	9270	9720	10045		
	65	4895	5710	6525	7340	8155	9000	9435	9750		
	70	4455	5195	5935	6680	7420	8190	8585	8875		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 650/65 R 42 NRO 174 D TL Traxion Optimall

EAN	8714692362279	Section width	665 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1925 mm
Tyre construction	Radial	Static loaded radius	845 mm
Recommended rim width	DW23B	Rolling circumference	5690 mm
Permitted rim width	DW20B (NRO), DW21B	SRI	925
		Tread depth	56 mm
		75% of the tyre volume	717 l

		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
Load capacity per tyre(kg)											
Speed (km/h)	10L	3870	4465	5030	5625	6225	6785	7385	7715	8010	8375
	10H	3645	4255	4860	5470	6075	6480	6865	7235		
	25	3680	4295	4905	5520	6135	6540	6925	7305		
	30	3645	4255	4860	5470	6075	6480	6865	7235		
	40	3545	4135	4725	5315	5910	6300	6675	7035		
	50	3475	4055	4635	5215	5795	6180	6545	6900		
	65	3375	3940	4500	5065	5625	6000	6355	6700		
	70	3070	3585	4095	4610	5120	5460	5785	6095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 650/85 R 42 183 D TL Traxion Optimall

EAN	8714692360411	Section width	665 mm
Nominal tyre pressure	2,0 bar	Overall diameter	2165 mm
Tyre construction	Radial	Static loaded radius	935 mm
Recommended rim width	DW23B	Rolling circumference	6380 mm
Permitted rim width	DW20B, DW21B	SRI	1025
		Tread depth	61 mm
		75% of the tyre volume	783 l

		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
Load capacity per tyre(kg)											
Speed (km/h)	10L	5035	5815	6545	7325	8100	8835	9615	10270	10615	10940
	10H	4745	5535	6330	7120	7910	8640	9155	9450		
	25	4790	5590	6385	7185	7985	8720	9240	9540		
	30	4745	5535	6330	7120	7910	8640	9155	9450		
	40	4615	5385	6150	6920	7690	8400	8900	9190		
	50	4525	5280	6035	6790	7545	8240	8730	9015		
	65	4395	5125	5860	6590	7325	8000	8475	8750		
	70	4000	4665	5330	6000	6665	7280	7710	7965		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 710/60 R 42 NRO 176 D TL Traxion Optimal

EAN		8714692362286				Section width		730 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		1925 mm			
Tyre construction		Radial				Static loaded radius		850 mm			
Recommended rim width		DW25B				Rolling circumference		5710 mm			
Permitted rim width		DW23B (NRO)				SRI		925			
						Tread depth		57 mm			
						75% of the tyre volume		793 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	4010	4630	5215	5835	6455	7290	7655	8240	8555	8875
	10H	3780	4410	5040	5670	6300	7020	7330	7670		
	25	3815	4450	5085	5725	6360	7085	7400	7740		
	30	3780	4410	5040	5670	6300	7020	7330	7670		
	40	3675	4290	4900	5515	6125	6825	7130	7455		
	50	3605	4205	4805	5410	6010	6695	6990	7315		
	65	3500	4085	4665	5250	5835	6500	6790	7100		
	70	3185	3715	4245	4780	5310	5915	6175	6460		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 710/70 R 42 182 D TL Traxion Optimal

EAN		8714692350719				Section width		730 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		2060 mm			
Tyre construction		Radial				Static loaded radius		910 mm			
Recommended rim width		DW25B				Rolling circumference		6110 mm			
Permitted rim width		DW23B				SRI		975			
						Tread depth		62 mm			
						75% of the tyre volume		819 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	4860	5615	6320	7070	7825	8530	9285	9920	10250	10625
	10H	4585	5345	6110	6875	7640	8370	8840	9180		
	25	4625	5395	6165	6940	7710	8450	8920	9265		
	30	4585	5345	6110	6875	7640	8370	8840	9180		
	40	4455	5200	5940	6685	7425	8140	8595	8925		
	50	4370	5100	5830	6555	7285	7985	8430	8755		
	65	4245	4950	5660	6365	7070	7750	8185	8500		
	70	3860	4505	5150	5790	6435	7055	7445	7735		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 710/75 R 42 184 D TL Traxion Optimall

EAN			8714692344909				Section width				730 mm	
Nominal tyre pressure			2,0 bar				Overall diameter				2160 mm	
Tyre construction			Radial				Static loaded radius				965 mm	
Recommended rim width			DW25B				Rolling circumference				6390 mm	
Permitted rim width			DW23B				SRI				1000	
							Tread depth				64 mm	
							75% of the tyre volume				917 l	
			Tyre pressure (bar)									
			0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
			Load capacity per tyre(kg)									
Speed (km/h)	10L	5170	5965	6720	7515	8315	9065	9865	10545	10895	11250	
	10H	4870	5685	6495	7305	8120	8910	9395	9720			
	25	4915	5735	6555	7375	8195	8995	9480	9810			
	30	4870	5685	6495	7305	8120	8910	9395	9720			
	40	4735	5525	6315	7105	7895	8665	9135	9450			
	50	4645	5420	6195	6970	7740	8500	8960	9270			
	65	4510	5260	6015	6765	7515	8250	8700	9000			
	70	4105	4790	5470	6155	6840	7510	7915	8190			

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 800/70 R 42 189 D TL Traxion Optimall

EAN				8714692350757			Section width				800 mm	
Nominal tyre pressure				2,0 bar			Overall diameter				2165 mm	
Tyre construction				Radial			Static loaded radius				930 mm	
Recommended rim width				DW27B			Rolling circumference				6380 mm	
Permitted rim width				DW25B			SRI				1025	
							Tread depth				64 mm	
							75% of the tyre volume				1043 l	
		Tyre pressure (bar)										
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	
		Load capacity per tyre(kg)										
Speed (km/h)	10L	5855	6760	7610	8515	9420	10270	11175	11940	12340	12875	
	10H	5515	6435	7355	8275	9195	9990	10640	11125			
	25	5570	6495	7425	8350	9280	10085	10740	11225			
	30	5515	6435	7355	8275	9195	9990	10640	11125			
	40	5365	6255	7150	8045	8940	9715	10345	10815			
	50	5260	6140	7015	7890	8770	9530	10145	10610			
	65	5110	5960	6810	7660	8515	9250	9850	10300			
	70	4650	5425	6200	6975	7745	8420	8965	9375			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

VF 900/50 R 42 NRO 180 D TL Traxion Optimal

EAN		8714692805691				Section width			885 mm		
Nominal tyre pressure		1,6 bar				Overall diameter			1975 mm		
Tyre construction		Radial				Static loaded radius			865 mm		
Recommended rim width		DW30B				Rolling circumference			5820 mm		
Permitted rim width		DW28B (NRO)				SRI			950		
						Tread depth			62 mm		
						75% of the tyre volume			1269 l		
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	5780	6670	7510	8405	9300	10505	11030	11875	12325	12875
	10H	5445	6355	7260	8170	9080	9990	10565	11125		
	25	5495	6415	7330	8245	9160	10085	10660	11225		
	30	5445	6355	7260	8170	9080	9990	10565	11125		
	40	5295	6180	7060	7945	8825	9715	10270	10815		
	50	5195	6060	6925	7790	8655	9530	10075	10610		
	65	5045	5885	6725	7565	8405	9250	9780	10300		
	70	4590	5355	6120	6885	7650	8420	8900	9375		

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 900/60 R 42 NRO 189 D TL Traxion Optimal

EAN		8714692350771				Section width		875 mm			
Nominal tyre pressure		2,0 bar				Overall diameter		2145 mm			
Tyre construction		Radial				Static loaded radius		920 mm			
Recommended rim width		DW30B				Rolling circumference		6315 mm			
Permitted rim width		DW28B (NRO)				SRI		1025			
						Tread depth		64 mm			
						75% of the tyre volume		1112 l			
		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
		Load capacity per tyre(kg)									
Speed (km/h)	10L	5780	6670	7510	8405	9300	10140	11030	11875	12325	12875
	10H	5445	6355	7260	8170	9080	9990	10565	11125		
	25	5495	6415	7330	8245	9160	10085	10660	11225		
	30	5445	6355	7260	8170	9080	9990	10565	11125		
	40	5295	6180	7060	7945	8825	9715	10270	10815		
	50	5195	6060	6925	7790	8655	9530	10075	10610		
	65	5045	5885	6725	7565	8405	9250	9780	10300		
	70	4590	5355	6120	6885	7650	8420	8900	9375		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

VF 750/70 R 44 186D TL Traxion Optimal

EAN	8714692805707	Section width	760 mm
Nominal tyre pressure	2,0 bar	Overall diameter	2185 mm
Tyre construction	Radial	Static loaded radius	940 mm
Recommended rim width	DW25B	Rolling circumference	6500 mm
Permitted rim width		SRI	1025
		Tread depth	65 mm
		75% of the tyre volume	1119 l

		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
Load capacity per tyre(kg)											
Speed (km/h)	10L	5405	6240	7025	7860	8700	9485	10320	11025	11395	11875
	10H	5095	5945	6795	7640	8490	9450	9825	10260		
	25	5140	6000	6855	7715	8570	9540	9915	10355		
	30	5095	5945	6795	7640	8490	9450	9825	10260		
	40	4955	5780	6605	7430	8255	9190	9555	9975		
	50	4860	5670	6480	7290	8100	9015	9370	9785		
	65	4715	5505	6290	7075	7860	8750	9100	9500		
	70	4295	5010	5725	6440	7155	7965	8280	8645		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume

BENEFITS

Extended lifespan

Maximized traction and excellent comfort

High load capacity



TRAXION XXL

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
28	540/75 R 28	154 D	2,4	DW18L	565	1495	685	4440	32
	600/65 R 28	147 D	1,6	DW18L	595	1480	670	4405	32
	600/65 R 28	154 D	2,4	DW18L	595	1480	670	4405	33
	600/70 R 28	157 D	2,4	DW20B	610	1540	700	4590	33
30	600/70 R 30	158 D	2,4	DW20B	630	1590	725	4750	34
	710/60 R 30	162 D	2,4	DW23B	705	1610	730	4800	34
32	800/65 R 32	167 A8/B	1,6	DW27B	825	1840	845	5490	35
34	600/70 R 34	160 D	2,4	DW18L	610	1700	775	5060	35
38	650/75 R 38	169 D	2,4	DW23B	695	1935	890	5775	36
	650/85 R 38	173 D	2,4	DW23B	710	2070	940	6195	36
	710/70 R 38	166 D	1,6	DW23B	730	1930	870	5760	37
	710/70 R 38	171 D	2,4	DW23B	730	1930	870	5760	37
	710/75 R 38	174 D	2,4	DW23B	715	2000	910	5950	38
	800/70 R 38	178 D	2,4	DW25B	825	2065	940	6160	38
	900/60 R 38	178 D	2,4	DW27B	870	2040	925	6100	39
42	710/70 R 42	173 D	2,4	DW23B	730	2060	940	6140	39
	710/75 R 42	175 D	2,4	DW23B	735	2150	980	6395	40

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

540/75 R 28 154 D TL TraxionXXL

EAN		8714692214165					Section width				565 mm			
Nominal tyre pressure		2,4 bar					Overall diameter				1495 mm			
Tyre construction		Radial					Static loaded radius				685 mm			
Recommended rim width		DW18L					Rolling circumference				4440 mm			
Permitted rim width		W/DW16L, W18L					SRI				700			
							Tread depth				50 mm			
							75% of the tyre volume				340 l			
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)												
Speed (km/h)	10L	2655	3015	3380	3745	4110	4405	4655	4935	5145	5320	5540	5625	
	10H	2205	2555	2905	3250	3495	3735	3905	4070	4215	4315			
	25	2270	2635	2995	3350	3600	3850	4020	4195	4345	4445			
	30	2205	2555	2905	3250	3495	3735	3905	4070	4215	4315			
	40		2435	2765	3095	3325	3560	3715	3875	4015	4105			
	50		2335	2655	2970	3190	3415	3565	3715	3850	3940			
	65			2525	2830	3040	3250	3395	3540	3665	3750			
	70			2300	2575	2765	2960	3090	3220	3335	3415			

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/65 R 28 147 D TL TraxionXXL

EAN		8714692326943				Section width		595 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1490 mm	
Tyre construction		Radial				Static loaded radius		670 mm	
Recommended rim width		DW18L				Rolling circumference		4405 mm	
Permitted rim width		W18L				SRI		700	
						Tread depth		50 mm	
						75% of the tyre volume		370 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2575	2920	3280	3625	3985	4260	4500	4775
	10H	2135	2480	2815	3105	3355	3535		
	25	2200	2555	2900	3200	3455	3645		
	30	2135	2480	2815	3105	3355	3535		
	40		2360	2680	2955	3190	3365		
	50		2260	2570	2835	3060	3230		
	65			2450	2700	2915	3075		
	70			2230	2460	2655	2800		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

600/65 R 28 154 D TL TraxionXXL

EAN	8714692326950	Section width	595 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1490 mm
Tyre construction	Radial	Static loaded radius	670 mm
Recommended rim width	DW18L	Rolling circumference	4405 mm
Permitted rim width	W18L	SRI	700
		Tread depth	50 mm
		75% of the tyre volume	370 l

		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	2610	2960	3320	3675	4035	4320	4555	4835	5045	5280	5510	5625
	10H	2165	2510	2855	3145	3395	3620	3835	4025	4195	4315		
	25	2230	2585	2940	3245	3500	3735	3955	4150	4325	4445		
	30	2165	2510	2855	3145	3395	3620	3835	4025	4195	4315		
	40		2390	2715	2995	3235	3450	3655	3835	3995	4105		
	50		2290	2605	2875	3100	3310	3505	3675	3830	3940		
	65			2480	2735	2955	3150	3335	3500	3650	3750		
	70			2260	2490	2690	2865	3035	3185	3320	3415		

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/70 R 28 157 D TL TraxionXXL

EAN	8714692244629	Section width	610 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1540 mm
Tyre construction	Radial	Static loaded radius	700 mm
Recommended rim width	DW20B	Rolling circumference	4590 mm
Permitted rim width	W/DW18L	SRI	725
		Tread depth	51 mm
		75% of the tyre volume	405 l

		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	2945	3340	3750	4150	4560	4885	5165	5475	5705	5900	6140	6190
	10H	2445	2835	3225	3605	3875	4080	4330	4515	4675	4745		
	25	2515	2920	3320	3715	3990	4205	4460	4650	4820	4890		
	30	2445	2835	3225	3605	3875	4080	4330	4515	4675	4745		
	40		2700	3070	3435	3690	3885	4120	4300	4450	4515		
	50		2590	2945	3295	3535	3730	3950	4120	4270	4330		
	65			2805	3135	3370	3550	3765	3925	4065	4125		
	70			2550	2855	3065	3230	3425	3575	3700	3755		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

600/70 R 30 158 D TL TraxionXXL													
EAN		8714692326967					Section width		630 mm				
Nominal tyre pressure		2,4 bar					Overall diameter		1590 mm				
Tyre construction		Radial					Static loaded radius		725 mm				
Recommended rim width		DW20B					Rolling circumference		4750 mm				
Permitted rim width		W/DW18L					SRI		750				
							Tread depth		53 mm				
							75% of the tyre volume		430 l				
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	3030	3440	3860	4275	4695	5030	5320	5635	5875	6075	6325	6375
	10H	2515	2920	3320	3715	3990	4200	4455	4650	4815	4890		
	25	2590	3010	3420	3825	4110	4325	4590	4790	4960	5035		
	30	2515	2920	3320	3715	3990	4200	4455	4650	4815	4890		
	40		2780	3160	3535	3800	3995	4245	4425	4585	4655		
	50		2665	3030	3390	3640	3835	4070	4245	4395	4465		
	65			2885	3230	3470	3650	3875	4045	4185	4250		
	70			2625	2940	3155	3320	3525	3680	3810	3870		

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/60 R 30 162 D TL TraxionXXL													
EAN		8714692277146						Section width		705 mm			
Nominal tyre pressure		2,4 bar						Overall diameter		1610 mm			
Tyre construction		Radial						Static loaded radius		730 mm			
Recommended rim width		DW23B						Rolling circumference		4800 mm			
Permitted rim width		DW21B, DW25B						SRI		750			
								Tread depth		53 mm			
								75% of the tyre volume		520 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	3255	3695	4145	4585	5040	5390	5690	6035	6295	6590	6880	7125
	10H	2700	3135	3560	3930	4240	4455	4790	5025	5235	5465		
	25	2785	3230	3670	4050	4370	4590	4935	5180	5395	5630		
	30	2700	3135	3560	3930	4240	4455	4790	5025	5235	5465		
	40		2985	3390	3740	4035	4245	4560	4785	4985	5200		
	50		2860	3250	3585	3870	4070	4370	4590	4780	4990		
	65			3095	3415	3685	3875	4165	4370	4555	4750		
	70			2820	3110	3355	3525	3790	3975	4145	4325		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

800/65 R 32 167 A8/B TL TraxionXXL

EAN				8714692206306		Section width			825 mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1840 mm								
Tyre construction				Radial		Static loaded radius			845 mm								
Recommended rim width				DW27B		Rolling circumference			5490 mm								
Permitted rim width				DW25B		SRI			875								
						Tread depth			54 mm								
						75% of the tyre volume			815 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	4455	5050	5670	6270	6890	7370	7775	8255								
	10H	3435	3985	4530	4995	5395	5830										
	25	3565	4135	4700	5185	5595	6050										
	30	3435	3985	4530	4995	5395	5830										
	40		3725	4235	4670	5040	5450										
	50		3725	4235	4670	5040	5450										

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/70 R 34 160 D TL TraxionXXL

EAN				8714692244643			Section width				610 mm		
Nominal tyre pressure				2,4 bar			Overall diameter				1700 mm		
Tyre construction				Radial			Static loaded radius				775 mm		
Recommended rim width				DW18L			Rolling circumference				5060 mm		
Permitted rim width				W18L, DW20B			SRI				800		
							Tread depth				53 mm		
							75% of the tyre volume				460 l		
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	3205	3635	4080	4515	4960	5315	5620	5955	6205	6420	6680	6750
	10H	2660	3085	3505	3925	4215	4455	4710	4910	5085	5175		
	25	2740	3180	3615	4045	4345	4590	4850	5060	5240	5335		
	30	2660	3085	3505	3925	4215	4455	4710	4910	5085	5175		
	40		2935	3340	3735	4015	4245	4485	4675	4845	4930		
	50		2815	3200	3585	3850	4070	4300	4485	4645	4725		
	65			3050	3410	3665	3875	4095	4270	4425	4500		
	70			2775	3105	3335	3525	3725	3885	4025	4095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

650/75 R 38 169 D TL TraxionXXL

EAN		8714692206269					Section width				695 mm			
Nominal tyre pressure		2,4 bar					Overall diameter				1935 mm			
Tyre construction		Radial					Static loaded radius				890 mm			
Recommended rim width		DW23B					Rolling circumference				5775 mm			
Permitted rim width		DW21B, DW20B					SRI				925			
							Tread depth				54 mm			
							75% of the tyre volume				705 l			
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)												
Speed (km/h)	10L	4050	4600	5165	5715	6275	6720	7110	7535	7850	8125	8455	8700	
	10H	3360	3900	4435	4965	5330	5605	5955	6215	6435	6670			
	25	3465	4020	4570	5115	5495	5775	6140	6405	6630	6875			
	30	3360	3900	4435	4965	5330	5605	5955	6215	6435	6670			
	40		3715	4225	4725	5075	5340	5670	5915	6125	6350			
	50		3565	4050	4535	4870	5120	5440	5675	5875	6090			
	65			3860	4315	4635	4875	5180	5405	5595	5800			
	70			3510	3930	4220	4435	4715	4920	5090	5280			

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/85 R 38 173 D TL TraxionXXL

EAN		8714692206221				Section width				710 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2070 mm			
Tyre construction		Radial				Static loaded radius				940 mm			
Recommended rim width		DW23B				Rolling circumference				6195 mm			
Permitted rim width		DW21B, DW20B				SRI				975			
						Tread depth				55 mm			
						75% of the tyre volume				850 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	4535	5145	5780	6395	7025	7525	7955	8435	8785	9090	9460	9750
	10H	3765	4365	4965	5555	5970	6265	6665	6955	7200	7475		
	25	3880	4500	5115	5725	6150	6460	6870	7165	7420	7705		
	30	3765	4365	4965	5555	5970	6265	6665	6955	7200	7475		
	40		4160	4730	5290	5680	5970	6350	6625	6860	7120		
	50		3990	4535	5075	5450	5725	6085	6350	6575	6825		
	65			4315	4830	5190	5450	5800	6050	6265	6500		
	70			3930	4395	4720	4960	5275	5505	5700	5915		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

710/70 R 38 166 D TL TraxionXXL

EAN				8714692326974		Section width			730 mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1930 mm								
Tyre construction				Radial		Static loaded radius			870 mm								
Recommended rim width				DW23B		Rolling circumference			5760 mm								
Permitted rim width				DW25B		SRI			925								
						Tread depth			58 mm								
						75% of the tyre volume			755 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	4370	4965	5570	6165	6770	7255	7670	8130								
	10H	3630	4210	4785	5355	5755	6095										
	25	3740	4340	4935	5520	5930	6280										
	30	3630	4210	4785	5355	5755	6095										
	40		4010	4560	5100	5480	5805										
	50		3845	4370	4890	5255	5565										
	65			4160	4660	5005	5300										
	70			3790	4240	4555	4825										

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/70 R 38 171 D TL TraxionXXL

EAN		8714692326981				Section width				730 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				1930 mm			
Tyre construction		Radial				Static loaded radius				870 mm			
Recommended rim width		DW23B				Rolling circumference				5760 mm			
Permitted rim width		DW25B				SRI				925			
						Tread depth				58 mm			
						75% of the tyre volume				755 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	4955	5625	6315	6990	7675	8220	8695	9215	9600	9935	10340	10455
	10L	4370	4965	5570	6165	6770	7255	7670	8130	8470	8765	9120	9225
	10H	3630	4210	4785	5355	5755	6095	6430	6705	6945	7070		
	25	3740	4340	4935	5520	5930	6280	6625	6910	7155	7290		
	30	3630	4210	4785	5355	5755	6095	6430	6705	6945	7070		
	40		4010	4560	5100	5480	5805	6120	6385	6610	6735		
	50		3845	4370	4890	5255	5565	5870	6125	6340	6460		
	65			4160	4660	5005	5300	5590	5830	6040	6150		
70			3790	4240	4555	4825	5085	5305	5495	5595			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

710/75 R 38 174 D TL TraxionXXL													
EAN		8714692291487					Section width			715 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			2000 mm			
Tyre construction		Radial					Static loaded radius			910 mm			
Recommended rim width		DW23B					Rolling circumference			5950 mm			
Permitted rim width		DW25B					SRI			975			
							Tread depth			57 mm			
							75% of the tyre volume			815 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5270	5985	6715	7435	8165	8745	9250	9805	10215	10570	11000	11390
	10L	4650	5280	5925	6560	7205	7715	8160	8650	9010	9325	9705	10050
	10H	3860	4480	5095	5700	6120	6440	6840	7135	7390	7705		
	25	3980	4615	5250	5875	6310	6635	7045	7350	7615	7940		
	30	3860	4480	5095	5700	6120	6440	6840	7135	7390	7705		
	40		4265	4850	5425	5830	6130	6510	6795	7035	7335		
	50		4090	4650	5205	5590	5880	6245	6515	6745	7035		
	65			4430	4955	5325	5600	5945	6205	6425	6700		
	70			4030	4510	4845	5095	5410	5645	5845	6095		

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/70 R 38 178 D TL TraxionXXL													
EAN		8714692206283					Section width		825 mm				
Nominal tyre pressure		2,4 bar					Overall diameter		2065 mm				
Tyre construction		Radial					Static loaded radius		940 mm				
Recommended rim width		DW25B					Rolling circumference		6160 mm				
Permitted rim width		DW27B					SRI		975				
							Tread depth		58 mm				
							75% of the tyre volume		985 l				
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5975	6780	7615	8425	9255	9915	10485	11110	11575	11980	12465	12750
	10L	5275	5985	6720	7435	8165	8745	9250	9805	10215	10570	11000	11250
	10H	4375	5080	5775	6460	6940	7475	7750	8085	8375	8625		
	25	4510	5230	5950	6655	7150	7705	7990	8335	8630	8890		
	30	4375	5080	5775	6460	6940	7475	7750	8085	8375	8625		
	40		4835	5495	6150	6605	7120	7380	7700	7975	8215		
	50		4635	5270	5900	6335	6825	7080	7385	7645	7875		
	65			5020	5615	6035	6500	6740	7030	7280	7500		
	70			4570	5110	5490	5915	6135	6400	6625	6825		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

900/60 R 38 178 D TL TraxionXXL

EAN		8714692309755				Section width				870 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2040 mm			
Tyre construction		Radial				Static loaded radius				925 mm			
Recommended rim width		DW27B				Rolling circumference				6100 mm			
Permitted rim width		DW28B, DW30B				SRI				975			
						Tread depth				60 mm			
						75% of the tyre volume				1050 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5930	6725	7545	8350	9170	9810	10355	10990	11460	11995	12525	12750
	10L	5230	5935	6660	7370	8090	8655	9135	9695	10115	10580	11050	11250
	10H	4340	5035	5720	6310	6810	7245	7690	8070	8415	8625		
	25	4470	5185	5895	6500	7020	7465	7925	8320	8670	8890		
	30	4340	5035	5720	6310	6810	7245	7690	8070	8415	8625		
	40		4795	5445	6010	6485	6900	7325	7685	8010	8215		
	50		4595	5225	5760	6220	6615	7025	7370	7680	7875		
	65			4975	5485	5920	6300	6690	7020	7315	7500		
	70			4525	4995	5390	5735	6085	6390	6655	6825		

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/70 R 42 173 D TL TraxionXXL

EAN		8714692326998				Section width				730 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				2060 mm			
Tyre construction		Radial				Static loaded radius				940 mm			
Recommended rim width		DW23B				Rolling circumference				6140 mm			
Permitted rim width		DW25B				SRI				975			
						Tread depth				58 mm			
						75% of the tyre volume				825 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5180	5880	6605	7310	8025	8595	9090	9635	10040	10390	10810	11050
	10L	4575	5190	5825	6450	7080	7585	8020	8500	8860	9165	9540	9750
	10H	3795	4405	5005	5600	6015	6440	6720	7015	7260	7475		
	25	3910	4540	5160	5775	6200	6635	6925	7225	7485	7705		
	30	3795	4405	5005	5600	6015	6440	6720	7015	7260	7475		
	40		4195	4765	5335	5730	6130	6400	6680	6915	7120		
	50		4020	4570	5115	5495	5880	6140	6405	6630	6825		
	65			4355	4870	5230	5600	5845	6100	6315	6500		
70			3960	4435	4760	5095	5320	5550	5745	5915			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

710/75 R 42 175 D TL TraxionXXL														
EAN			8714692244520					Section width			735 mm			
Nominal tyre pressure			2,4 bar					Overall diameter			2150 mm			
Tyre construction			Radial					Static loaded radius			980 mm			
Recommended rim width			DW23B					Rolling circumference			6395 mm			
Permitted rim width			DW25B					SRI			1025			
								Tread depth			58 mm			
								75% of the tyre volume			910 l			
			Tyre pressure (bar)											
			0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
			Load capacity per tyre(kg)											
Speed (km/h)	10C	5510	6250	7020	7765	8530	9135	9660	10240	10670	11045	11490	11730	
	10L	4860	5515	6190	6855	7525	8060	8525	9035	9415	9745	10140	10350	
	10H	4035	4680	5320	5955	6395	6900	7145	7455	7720	7935			
	25	4155	4825	5485	6135	6590	7110	7360	7680	7955	8175			
	30	4035	4680	5320	5955	6395	6900	7145	7455	7720	7935			
	40		4455	5065	5670	6090	6570	6805	7095	7350	7555			
	50		4275	4860	5435	5840	6300	6525	6805	7045	7245			
	65			4625	5180	5560	6000	6215	6480	6710	6900			
	70			4210	4710	5060	5460	5655	5900	6110	6280			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL



TRACTOR TYRES DRIVE RADIAL



TRAXION 65

HIGHEST PRODUCTIVITY FOR
MODERN HIGH-TECH TRACTORS

FEATURES

Traxion concept with unique tread compound and high rubber content in the center

Traction zone: transverse and non-parallel lugs on the outside of the tread

Comfort zone: extra-large contact area in the center for continuous road contact

BENEFITS

30% longer lifespan*

Highest traction & excellent self-cleaning on all soil types

29% lower 'in cabin' noise**

* Compared with premium competitors according to Vredestein R&D test programmes.

** Compared with premium competitors on a ISO certified (ISO10844:2014) RDW test track at 40km/h, according to Vredestein R&D test programmes.



TRAXION 65

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
16	320/65 R 16	117 D	2,4	W10	320	825	370	2455	44
18	320/65 R 18	119 D	2,4	W9	310	875	390	2605	44
	340/65 R 18	122 D	2,4	W9	320	905	415	2700	45
20	420/65 R 20	135 D	2,4	W13	415	1055	480	3165	45
24	440/65 R 24	128 D	1,6	DW14L	440	1185	540	3545	46
	480/65 R 24	133 D	1,6	DW15L	485	1250	570	3735	46
	540/65 R 24	140 D	1,6	DW16L	540	1315	590	3920	47
28	440/65 R 28	131 D	1,6	DW14L	440	1290	590	3870	47
	480/65 R 28	136 D	1,6	DW15L	485	1350	610	4015	48
	540/65 R 28	142 D	1,6	DW16L	540	1410	635	4210	48
30	540/65 R 30	143 D	1,6	DW16L	540	1460	660	4380	49
	540/65 R 30	150 D	2,4	DW16L	540	1460	660	4380	49
34	540/65 R 34	145 D	1,6	DW16L	540	1575	715	4695	50
	540/65 R 34	152 D	2,4	DW16L	540	1575	715	4695	50
	600/65 R 34	151 D	1,6	DW18L	595	1640	740	4905	51
38	540/65 R 38	147 D	1,6	DW16L	545	1685	770	5020	51
	600/65 R 38	153 D	1,6	DW18L	595	1750	790	5210	52
	650/65 R 38	157 D	1,6	DW20B	650	1840	830	5480	52
42	650/65 R 42	158 D	1,6	DW20B	650	1925	880	5740	53

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

320/65 R 16 117 D TL Traxion 65													
EAN		8714692344688					Section width			320 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			825 mm			
Tyre construction		Radial					Static loaded radius			370 mm			
Recommended rim width		W10					Rolling circumference			2455 mm			
Permitted rim width		W9, W11					SRI			390			
							Tread depth			31 mm			
							75% of the tyre volume			50 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	805	915	1030	1140	1250	1340	1415	1515	1640	1755	1855	1930
	10H	670	775	885	990	1060	1120	1230	1330	1415	1480		
	25	690	800	910	1020	1095	1155	1265	1375	1460	1525		
	30	670	775	885	990	1060	1120	1230	1330	1415	1480		
	40		740	840	940	1010	1070	1170	1270	1345	1405		
	50		710	805	900	970	1025	1125	1215	1290	1350		
	65			770	860	925	975	1070	1160	1230	1285		
	70			700	780	840	885	975	1055	1120	1170		

For the explanation of the symbols and abbreviations, see the inside of the last page.

320/65 R 18 119 D TL Traxion 65													
EAN		8714692344695					Section width			310 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			875 mm			
Tyre construction		Radial					Static loaded radius			390 mm			
Recommended rim width		W9					Rolling circumference			2605 mm			
Permitted rim width		W10, W11					SRI			425			
							Tread depth			31 mm			
							75% of the tyre volume			53 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	850	965	1085	1200	1320	1410	1490	1600	1725	1850	1955	2040
	10H	705	820	930	1040	1120	1185	1295	1405	1490	1565		
	25	725	845	960	1075	1155	1220	1335	1450	1535	1610		
	30	705	820	930	1040	1120	1185	1295	1405	1490	1565		
	40		780	885	990	1065	1130	1235	1340	1420	1490		
	50		750	850	950	1020	1080	1185	1285	1360	1430		
	65			810	905	975	1030	1130	1220	1295	1360		
	70			735	825	885	935	1025	1110	1180	1240		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

340/65 R 18 122 D TL Traxion 65

EAN		8714692344732					Section width					320 mm	
Nominal tyre pressure		2,4 bar					Overall diameter					905 mm	
Tyre construction		Radial					Static loaded radius					415 mm	
Recommended rim width		W9					Rolling circumference					2700 mm	
Permitted rim width		W10, W11					SRI					425	
							Tread depth					33 mm	
							75% of the tyre volume					61 l	
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	935	1060	1190	1315	1445	1550	1640	1755	1895	2035	2145	2250
	10H	775	900	1025	1145	1230	1325	1425	1545	1640	1725		
	25	800	925	1055	1180	1265	1365	1470	1590	1690	1780		
	30	775	900	1025	1145	1230	1325	1425	1545	1640	1725		
	40		855	975	1090	1170	1260	1355	1470	1560	1645		
	50		820	935	1045	1120	1210	1300	1410	1495	1575		
	65			890	995	1070	1150	1240	1340	1425	1500		
	70			810	905	975	1045	1125	1220	1295	1365		

For the explanation of the symbols and abbreviations, see the inside of the last page.

420/65 R 20 135 D TL Traxion 65

EAN		8714692344794					Section width					415 mm		
Nominal tyre pressure		2,4 bar					Overall diameter					1055 mm		
Tyre construction		Radial					Static loaded radius					480 mm		
Recommended rim width		W13					Rolling circumference					3165 mm		
Permitted rim width		W11, W12					SRI					500		
							Tread depth					36 mm		
							75% of the tyre volume					116 l		
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)												
Speed (km/h)	10L	1360	1545	1735	1920	2105	2255	2385	2560	2760	2960	3125	3270	
	10H	1130	1310	1490	1665	1790	1895	2075	2245	2385	2505			
	25	1165	1350	1535	1715	1845	1955	2135	2315	2460	2585			
	30	1130	1310	1490	1665	1790	1895	2075	2245	2385	2505			
	40		1245	1420	1585	1705	1805	1975	2140	2270	2385			
	50		1195	1360	1520	1635	1735	1895	2050	2180	2290			
	65			1295	1450	1555	1650	1805	1955	2075	2180			
	70			1180	1320	1415	1500	1640	1780	1885	1985			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

440/65 R 24 128 D TL Traxion 65									
EAN			8714692360466			Section width		440 mm	
Nominal tyre pressure			1,6 bar			Overall diameter		1185 mm	
Tyre construction			Radial			Static loaded radius		540 mm	
Recommended rim width			DW14L			Rolling circumference		3545 mm	
Permitted rim width			W/DW13(L), W14L,			SRI		575	
			W/DW15L			Tread depth		40 mm	
EAN Tube			8714692239748			75% of the tyre volume		155 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1505	1705	1915	2120	2325	2490	2625	2785
	10H	1245	1445	1645	1815	1955	2070		
	25	1285	1490	1695	1870	2015	2135		
	30	1245	1445	1645	1815	1955	2070		
	40		1375	1565	1725	1865	1970		
	50		1320	1500	1655	1785	1890		
	65			1430	1575	1700	1800		
	70			1300	1435	1550	1640		

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/65 R 24 133 D TL Traxion 65									
EAN		8714692360473			Section width		485 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1250 mm		
Tyre construction		Radial			Static loaded radius		570 mm		
Recommended rim width		DW15L			Rolling circumference		3735 mm		
Permitted rim width		W/DW14, W15L			SRI		600		
					Tread depth		42 mm		
EAN Tube		8714692239755			75% of the tyre volume		200 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1720	1950	2190	2425	2660	2850	3005	3190
	10H	1425	1655	1880	2075	2240	2370		
	25	1470	1705	1940	2140	2310	2440		
	30	1425	1655	1880	2075	2240	2370		
	40		1575	1790	1975	2135	2255		
	50		1510	1720	1895	2045	2165		
	65			1635	1805	1950	2060		
	70			1490	1640	1775	1875		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

540/65 R 24 140 D TL Traxion 65

EAN				8714692360480		Section width				540 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1315 mm							
Tyre construction				Radial		Static loaded radius				590 mm							
Recommended rim width				DW16L		Rolling circumference				3920 mm							
Permitted rim width				W/DW15L, W16L,		SRI				625							
				W/DW18L		Tread depth				46 mm							
				75% of the tyre volume				260 l									
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	2070	2350	2635	2915	3200	3425	3615	3835								
	10H	1715	1990	2265	2495	2695	2875										
	25	1770	2050	2330	2575	2775	2965										
	30	1715	1990	2265	2495	2695	2875										
	40		1895	2155	2375	2565	2740										
	50		1820	2065	2280	2460	2625										
	65			1970	2170	2345	2500										
	70			1790	1975	2130	2275										

For the explanation of the symbols and abbreviations, see the inside of the last page.

440/65 R 28 131 D TL Traxion 65

EAN				8714692360497		Section width				440 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1290 mm							
Tyre construction				Radial		Static loaded radius				590 mm							
Recommended rim width				DW14L		Rolling circumference				3870 mm							
Permitted rim width				W13, W14L, W/DW15L		SRI				625							
						Tread depth				40 mm							
						75% of the tyre volume				180 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1615	1830	2055	2275	2500	2675	2820	2995								
	10H	1340	1555	1765	1950	2105	2245										
	25	1380	1600	1820	2005	2165	2310										
	30	1340	1555	1765	1950	2105	2245										
	40		1480	1680	1855	2000	2135										
	50		1420	1615	1780	1920	2050										
	65			1535	1695	1830	1950										
	70			1400	1540	1665	1775										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

480/65 R 28 136 D TL Traxion 65									
EAN		8714692360503				Section width		485 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1350 mm	
Tyre construction		Radial				Static loaded radius		610 mm	
Recommended rim width		DW15L				Rolling circumference		4015 mm	
Permitted rim width		W/DW14, W15L				SRI		650	
						Tread depth		42 mm	
EAN Tube		8714692239793				75% of the tyre volume		225 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1845	2095	2350	2600	2855	3055	3225	3420
	10H	1530	1775	2020	2225	2400	2575		
	25	1575	1830	2080	2295	2475	2655		
	30	1530	1775	2020	2225	2400	2575		
	40		1690	1920	2120	2285	2455		
	50		1620	1840	2030	2195	2350		
	65			1755	1935	2090	2240		
	70			1595	1760	1900	2040		

For the explanation of the symbols and abbreviations, see the inside of the last page.

540/65 R 28 142 D TL Traxion 65									
EAN				8714692360510		Section width		540 mm	
Nominal tyre pressure				1,6 bar		Overall diameter		1410 mm	
Tyre construction				Radial		Static loaded radius		635 mm	
Recommended rim width				DW16L		Rolling circumference		4210 mm	
Permitted rim width				W/DW15L*, W16L, W/DW18L		SRI		675	
						Tread depth		46 mm	
EAN Tube				8714692239809		75% of the tyre volume		285 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2215	2510	2820	3120	3425	3665	3865	4105
	10H	1835	2130	2420	2670	2880	3045		
	25	1890	2195	2495	2750	2970	3140		
	30	1835	2130	2420	2670	2880	3045		
	40		2030	2305	2540	2745	2900		
	50		1945	2210	2440	2630	2785		
	65			2105	2320	2505	2650		
	70			1915	2115	2280	2410		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

540/65 R 30 143 D TL Traxion 65

EAN		8714692360527			Section width			540 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1460 mm	
Tyre construction		Radial			Static loaded radius			660 mm	
Recommended rim width		DW16L			Rolling circumference			4380 mm	
Permitted rim width		W/DW15L*, W16L,			SRI			700	
		W/DW18L			Tread depth			46 mm	
EAN Tube		8714692331381			75% of the tyre volume			305 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2285	2590	2905	3215	3530	3780	3990	4235
	10H	1895	2195	2495	2755	2975	3135		
	25	1950	2265	2575	2840	3065	3230		
	30	1895	2195	2495	2755	2975	3135		
	40		2090	2380	2620	2830	2985		
	50		2005	2280	2515	2715	2860		
	65			2170	2395	2585	2725		
	70			1975	2180	2350	2480		

For the explanation of the symbols and abbreviations, see the inside of the last page.

540/65 R 30 150 D TL Traxion 65

EAN				8714692360534				Section width				540 mm			
Nominal tyre pressure				2,4 bar				Overall diameter				1460 mm			
Tyre construction				Radial				Static loaded radius				660 mm			
Recommended rim width				DW16L				Rolling circumference				4380 mm			
Permitted rim width				W/DW15L*,W16L, W/DW18L				SRI				700			
								Tread depth				46 mm			
EAN Tube				8714692331381				75% of the tyre volume				305 l			
		Tyre pressure (bar)													
		0,60 0,80 1,00 1,20 1,40 1,60 1,80 2,00 2,20 2,40 2,60 2,80													
		Load capacity per tyre(kg)													
Speed (km/h)	10L	2285	2590	2905	3215	3530	3780	3990	4235	4415	4620	4825	5025		
	10H	1895	2195	2495	2755	2975	3135	3355	3525	3670	3850				
	25	1950	2265	2575	2840	3065	3230	3460	3630	3785	3970				
	30	1895	2195	2495	2755	2975	3135	3355	3525	3670	3850				
	40		2090	2380	2620	2830	2985	3195	3355	3495	3670				
	50		2005	2280	2515	2715	2860	3065	3215	3355	3520				
	65			2170	2395	2585	2725	2920	3065	3195	3350				
	70			1975	2180	2350	2480	2655	2790	2905	3050				

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

540/65 R 34 145 D TL Traxion 65									
EAN		8714692360541			Section width			540 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1575 mm	
Tyre construction		Radial			Static loaded radius			715 mm	
Recommended rim width		DW16L			Rolling circumference			4695 mm	
Permitted rim width		W/DW15L*, W16L, W/DW18L			SRI			750	
					Tread depth			46 mm	
					75% of the tyre volume			330 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2420	2745	3080	3410	3745	4005	4225	4485
	10H	2005	2330	2645	2920	3150	3335		
	25	2070	2400	2725	3010	3245	3435		
	30	2005	2330	2645	2920	3150	3335		
	40		2220	2520	2780	3000	3175		
	50		2125	2415	2665	2875	3045		
	65			2300	2540	2740	2900		
	70			2095	2310	2495	2640		

For the explanation of the symbols and abbreviations, see the inside of the last page.

540/65 R 34 152 D TL Traxion 65													
EAN		8714692360558					Section width			540 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1575 mm			
Tyre construction		Radial					Static loaded radius			715 mm			
Recommended rim width		DW16L					Rolling circumference			4695 mm			
Permitted rim width		W/DW15L*, W16L, W/DW18L					SRI			750			
							Tread depth			46 mm			
							75% of the tyre volume			330 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	2420	2745	3080	3410	3745	4005	4225	4485	4680	4895	5115	5325
	10H	2005	2330	2645	2920	3150	3335	3560	3735	3890	4080		
	25	2070	2400	2725	3010	3245	3435	3665	3850	4010	4205		
	30	2005	2330	2645	2920	3150	3335	3560	3735	3890	4080		
	40		2220	2520	2780	3000	3175	3390	3555	3705	3885		
	50		2125	2415	2665	2875	3045	3250	3410	3555	3730		
	65			2300	2540	2740	2900	3095	3250	3385	3550		
	70			2095	2310	2495	2640	2815	2955	3080	3230		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

600/65 R 34 151 D TL Traxion 65

EAN		8714692360565			Section width			595 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1640 mm	
Tyre construction		Radial			Static loaded radius			740 mm	
Recommended rim width		DW18L			Rolling circumference			4905 mm	
Permitted rim width		W18L, DW20B			SRI			775	
					Tread depth			53 mm	
EAN Tube		8714692331411			75% of the tyre volume			425 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2845	3225	3620	4005	4400	4710	4970	5275
	10H	2360	2735	3110	3430	3705	3965		
	25	2430	2820	3205	3535	3815	4090		
	30	2360	2735	3110	3430	3705	3965		
	40		2605	2960	3265	3525	3780		
	50		2500	2840	3135	3380	3625		
	65			2705	2985	3220	3450		
	70			2460	2715	2930	3140		

For the explanation of the symbols and abbreviations, see the inside of the last page.

540/65 R 38 147 D TL Traxion 65

EAN				8714692360572		Section width				545 mm					
Nominal tyre pressure				1,6 bar		Overall diameter				1685 mm					
Tyre construction				Radial		Static loaded radius				770 mm					
Recommended rim width				DW16L		Rolling circumference				5020 mm					
Permitted rim width				W16L, W/DW18L		SRI				800					
						Tread depth				46 mm					
EAN Tube				8714692331459		75% of the tyre volume				365 l					
		Tyre pressure (bar)													
		0,60		0,80		1,00		1,20		1,40		1,60		1,80	
		Load capacity per tyre(kg)													
Speed (km/h)	10L	2555	2895	3250	3595	3950	4225	4460	4735						
	10H	2120	2455	2790	3080	3325	3535								
	25	2180	2530	2875	3175	3425	3645								
	30	2120	2455	2790	3080	3325	3535								
	40		2340	2660	2935	3165	3365								
	50		2245	2550	2810	3035	3230								
	65			2430	2680	2890	3075								
	70			2210	2435	2630	2800								

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

600/65 R 38 153 D TL Traxion 65									
EAN		8714692360589			Section width			595 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1750 mm	
Tyre construction		Radial			Static loaded radius			790 mm	
Recommended rim width		DW18L			Rolling circumference			5210 mm	
Permitted rim width		W18L, DW20B			SRI			825	
					Tread depth			53 mm	
EAN Tube		8714692331466			75% of the tyre volume			455 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2995	3400	3815	4220	4635	4960	5235	5555
	10H	2485	2885	3275	3615	3900	4200		
	25	2560	2970	3375	3725	4020	4325		
	30	2485	2885	3275	3615	3900	4200		
	40		2745	3120	3440	3715	3995		
	50		2635	2990	3300	3560	3835		
	65			2850	3145	3390	3650		
	70			2595	2860	3085	3320		

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/65 R 38 157 D TL Traxion 65									
EAN		8714692360596			Section width		650 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1840 mm		
Tyre construction		Radial			Static loaded radius		830 mm		
Recommended rim width		DW20B			Rolling circumference		5480 mm		
Permitted rim width		W/DW18L#			SRI		875		
					Tread depth		55 mm		
EAN Tube		8714692331473			75% of the tyre volume		575 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	3385	3840	4310	4770	5240	5605	5915	6280
	10H	2810	3260	3705	4085	4410	4745		
	25	2895	3360	3815	4210	4545	4890		
	30	2810	3260	3705	4085	4410	4745		
	40		3105	3525	3890	4200	4515		
	50		2975	3380	3730	4025	4330		
	65			3220	3550	3835	4125		
	70			2930	3235	3490	3755		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

650/65 R 42 158 D TL Traxion 65									
EAN			8714692360602			Section width			650 mm
Nominal tyre pressure			1,6 bar			Overall diameter			1925 mm
Tyre construction			Radial			Static loaded radius			880 mm
Recommended rim width			DW20B			Rolling circumference			5740 mm
Permitted rim width			W/DW18L#			SRI			925
						Tread depth			55 mm
						75% of the tyre volume			620 l
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	3550	4025	4520	5000	5490	5875	6200	6580
	10H	2945	3415	3885	4280	4620	4890		
	25	3035	3520	4000	4415	4765	5035		
	30	2945	3415	3885	4280	4620	4890		
	40		3255	3695	4075	4400	4655		
	50		3120	3545	3910	4220	4465		
	65			3375	3725	4020	4250		
	70			3070	3390	3655	3870		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL



TRAXION 70

HIGHEST PRODUCTIVITY FOR
MODERN HIGH-TECH TRACTORS

FEATURES

Extra-large contact area in the centre

Widely spaced cleats in the shoulder

Genuine tread width

BENEFITS

Longest lifespan

Excellent self-cleaning, highest traction

Large footprint, maximum traction



TRAXION 70

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
16	240/70 R 16	104 D	2,4	W8	245	735	335	2190	56
	260/70 R 16	109 D	2,4	W8	260	765	345	2280	56
	280/70 R 16	112 D	2,4	W9	280	800	365	2390	57
18	280/70 R 18	114 D	2,4	W9	275	850	385	2540	57
20	260/70 R 20	113 D	2,4	W8	265	880	390	2620	58
	280/70 R 20	116 D	2,4	W9	280	910	415	2715	58
	300/70 R 20	120 D	2,4	W9	295	945	439	2815	59
	320/70 R 20	123 D	2,4	W10	320	985	450	2935	59
	360/70 R 20	129 D	2,4	W11	360	1045	479	3115	60
	380/70 R 20	132 D	2,4	W12	390	1070	490	3190	60
24	320/70 R 24	116 D	1,6	W10	325	1100	505	3245	61
	360/70 R 24	122 D	1,6	W11	360	1150	525	3395	61
	380/70 R 24	125 D	1,6	W12	385	1185	540	3495	62
	420/70 R 24	130 D	1,6	W13	430	1240	560	3675	62
	480/70 R 24	138 D	1,6	DW15L	490	1305	585	3850	63
28	380/70 R 28	127 D	1,6	W12	390	1290	590	3825	63
	420/70 R 28	133 D	1,6	W13	430	1345	615	3975	64
	480/70 R 28	140 D	1,6	DW15L	495	1405	635	4155	64
30	480/70 R 30	141 D	1,6	DW15L	490	1470	665	4370	65
34	480/70 R 34	143 D	1,6	DW15L	485	1575	715	4645	65
	520/70 R 34	148 D	1,6	DW16L	525	1640	740	4840	66
38	480/70 R 38	145 D	1,6	DW15L	485	1685	765	5015	66
	520/70 R 38	150 D	1,6	DW16L	540	1750	790	5165	67
	580/70 R 38	155 D	1,6	DW18L	595	1825	820	5385	67
42	620/70 R 42	166 D	2,4	DW20B	625	1930	885	5750	68

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

240/70 R 16 104 D TL Traxion 70													
EAN		8714692344602					Section width			245 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			735 mm			
Tyre construction		Radial					Static loaded radius			335 mm			
Recommended rim width		W8					Rolling circumference			2190 mm			
Permitted rim width		W8L, W9					SRI			350			
							Tread depth			29 mm			
							75% of the tyre volume			26 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	550	625	705	780	855	915	970	1025	1120	1200	1270	1350
	10H	460	530	605	675	725	770	840	910	970	1035		
	25	470	550	625	695	750	795	870	940	1000	1065		
	30	460	530	605	675	725	770	840	910	970	1035		
	40		505	575	645	690	735	800	870	920	985		
	50		485	550	620	665	705	770	835	885	945		
	65			525	590	630	670	730	795	840	900		
	70			480	535	575	610	665	720	765	820		

For the explanation of the symbols and abbreviations, see the inside of the last page.

260/70 R 16 109 D TL Traxion 70													
EAN		8714692344619					Section width			260 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			765 mm			
Tyre construction		Radial					Static loaded radius			345 mm			
Recommended rim width		W8					Rolling circumference			2280 mm			
Permitted rim width		W8L, W9					SRI			370			
							Tread depth			31 mm			
							75% of the tyre volume			31 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	630	715	805	890	980	1050	1110	1175	1285	1375	1450	1545
	10H	525	610	690	775	830	890	965	1045	1110	1185		
	25	540	625	715	800	855	920	995	1075	1140	1220		
	30	525	610	690	775	830	890	965	1045	1110	1185		
	40		580	660	735	790	850	915	995	1055	1130		
	50		555	630	705	760	815	880	955	1010	1080		
	65			600	675	725	775	840	905	965	1030		
	70			545	610	660	705	760	825	875	935		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

280/70 R 16 112 D TL Traxion 70

EAN		8714692344633					Section width					280 mm		
Nominal tyre pressure		2,4 bar					Overall diameter					800 mm		
Tyre construction		Radial					Static loaded radius					365 mm		
Recommended rim width		W9					Rolling circumference					2390 mm		
Permitted rim width		W8, W8L, W10					SRI					390		
							Tread depth					33 mm		
							75% of the tyre volume					39 l		
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)												
Speed (km/h)	10L	700	795	890	985	1085	1160	1230	1300	1420	1525	1610	1680	
	10H	580	675	765	860	920	975	1065	1155	1225	1290			
	25	600	695	790	885	950	1005	1100	1190	1265	1325			
	30	580	675	765	860	920	975	1065	1155	1225	1290			
	40		640	730	815	875	930	1015	1100	1170	1225			
	50		615	700	785	840	895	975	1055	1120	1175			
	65			665	745	800	850	930	1005	1065	1120			
	70			605	680	730	775	845	915	970	1020			

For the explanation of the symbols and abbreviations, see the inside of the last page.

280/70 R 18 114 D TL Traxion 70

EAN			8714692344640				Section width				275 mm			
Nominal tyre pressure			2,4 bar				Overall diameter				850 mm			
Tyre construction			Radial				Static loaded radius				385 mm			
Recommended rim width			W9				Rolling circumference				2540 mm			
Permitted rim width			W8, W8L, W10				SRI				410			
							Tread depth				33 mm			
							75% of the tyre volume				42 l			
			Tyre pressure (bar)											
			0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
			Load capacity per tyre(kg)											
Speed (km/h)	10L	740	840	940	1040	1145	1225	1295	1375	1500	1610	1695	1770	
	10H	615	710	810	905	970	1035	1125	1220	1295	1355			
	25	630	735	835	935	1000	1065	1160	1260	1335	1400			
	30	615	710	810	905	970	1035	1125	1220	1295	1355			
	40		680	770	860	925	985	1075	1160	1235	1290			
	50		650	740	825	890	945	1030	1115	1185	1240			
	65			705	785	845	900	980	1060	1125	1180			
	70			640	715	770	820	890	965	1025	1075			

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

260/70 R 20 113 D TL Traxion 70													
EAN		8714692344626					Section width			265 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			880 mm			
Tyre construction		Radial					Static loaded radius			390 mm			
Recommended rim width		W8					Rolling circumference			2620 mm			
Permitted rim width		W9					SRI			425			
							Tread depth			31 mm			
							75% of the tyre volume			38 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	705	800	900	995	1095	1170	1240	1315	1435	1540	1620	1725
	10H	585	680	775	865	930	975	1075	1165	1240	1325		
	25	605	700	795	890	960	1005	1110	1200	1275	1365		
	30	585	680	775	865	930	975	1075	1165	1240	1325		
	40		650	735	825	885	930	1025	1110	1180	1260		
	50		620	705	790	850	895	985	1065	1130	1210		
	65			675	755	810	850	935	1015	1075	1150		
	70			610	685	735	775	850	925	980	1045		

For the explanation of the symbols and abbreviations, see the inside of the last page.

280/70 R 20 116 D TL Traxion 70													
EAN		8714692344657					Section width			280 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			910 mm			
Tyre construction		Radial					Static loaded radius			415 mm			
Recommended rim width		W9					Rolling circumference			2715 mm			
Permitted rim width		W10					SRI			450			
							Tread depth			33 mm			
							75% of the tyre volume			46 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	775	880	990	1095	1205	1290	1365	1445	1575	1690	1785	1875
	10H	645	750	850	950	1020	1095	1185	1285	1360	1440		
	25	665	770	875	980	1055	1125	1220	1320	1405	1480		
	30	645	750	850	950	1020	1095	1185	1285	1360	1440		
	40		710	810	905	975	1040	1130	1220	1295	1370		
	50		685	775	870	935	1000	1080	1170	1245	1315		
	65			740	830	890	950	1030	1115	1185	1250		
	70			675	755	810	865	935	1015	1080	1140		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

300/70 R 20 120 D TL Traxion 70

EAN		8714692344671						Section width				295 mm	
Nominal tyre pressure		2,4 bar						Overall diameter				945 mm	
Tyre construction		Radial						Static loaded radius				439 mm	
Recommended rim width		W9						Rolling circumference				2815 mm	
Permitted rim width		W10						SRI				450	
								Tread depth				36 mm	
								75% of the tyre volume				55 l	
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	865	980	1100	1215	1335	1430	1515	1605	1750	1880	1980	2100
	10H	715	830	945	1055	1135	1220	1315	1425	1515	1610		
	25	740	855	975	1090	1170	1255	1355	1470	1560	1660		
	30	715	830	945	1055	1135	1220	1315	1425	1515	1610		
	40		790	900	1005	1080	1160	1255	1355	1440	1535		
	50		760	865	965	1035	1115	1200	1300	1380	1470		
	65			820	920	985	1060	1145	1240	1315	1400		
	70			750	835	900	965	1040	1130	1195	1275		

For the explanation of the symbols and abbreviations, see the inside of the last page.

320/70 R 20 123 D TL Traxion 70

EAN		8714692344701				Section width				320 mm			
Nominal tyre pressure		2,4 bar				Overall diameter				985 mm			
Tyre construction		Radial				Static loaded radius				450 mm			
Recommended rim width		W10				Rolling circumference				2935 mm			
Permitted rim width		W9, W11				SRI				475			
						Tread depth				36 mm			
						75% of the tyre volume				69 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	955	1080	1215	1345	1475	1580	1670	1770	1935	2075	2190	2325
	10H	790	915	1045	1165	1255	1325	1450	1575	1670	1780		
	25	815	945	1075	1205	1290	1365	1495	1620	1720	1835		
	30	790	915	1045	1165	1255	1325	1450	1575	1670	1780		
	40		875	995	1110	1195	1260	1385	1500	1590	1695		
	50		840	950	1065	1145	1210	1325	1435	1525	1630		
	65			905	1015	1090	1150	1265	1370	1450	1550		
	70			825	925	990	1045	1150	1245	1320	1410		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

360/70 R 20 129 D TL Traxion 70													
EAN		8714692344756					Section width			360 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1045 mm			
Tyre construction		Radial					Static loaded radius			479 mm			
Recommended rim width		W11					Rolling circumference			3115 mm			
Permitted rim width		W10, W12					SRI			500			
							Tread depth			38 mm			
							75% of the tyre volume			95 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	1145	1295	1455	1610	1770	1895	2005	2125	2320	2490	2625	2775
	10H	950	1100	1250	1400	1505	1610	1740	1890	2005	2130		
	25	975	1135	1290	1445	1550	1660	1795	1945	2065	2190		
	30	950	1100	1250	1400	1505	1610	1740	1890	2005	2130		
	40		1050	1190	1335	1430	1535	1660	1795	1910	2025		
	50		1005	1140	1280	1375	1470	1590	1725	1830	1945		
	65			1090	1215	1310	1400	1515	1640	1740	1850		
	70			990	1110	1190	1275	1380	1495	1585	1685		

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/70 R 20 132 D TL Traxion 70													
EAN		8714692344763					Section width			390 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1070 mm			
Tyre construction		Radial					Static loaded radius			490 mm			
Recommended rim width		W12					Rolling circumference			3190 mm			
Permitted rim width		W11, W13					SRI			525			
							Tread depth			40 mm			
							75% of the tyre volume			108 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	1245	1410	1585	1755	1925	2060	2180	2310	2525	2705	2855	3000
	10H	1030	1195	1360	1525	1635	1725	1895	2055	2180	2300		
	25	1065	1235	1405	1570	1685	1780	1955	2115	2245	2370		
	30	1030	1195	1360	1525	1635	1725	1895	2055	2180	2300		
	40		1140	1295	1450	1560	1645	1805	1955	2075	2190		
	50		1095	1245	1390	1495	1575	1730	1875	1990	2100		
	65			1185	1325	1425	1500	1650	1785	1895	2000		
	70			1075	1205	1295	1365	1500	1625	1725	1820		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

320/70 R 24 116 D TL Traxion 70

EAN				8714692360688		Section width				325 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1100 mm							
Tyre construction				Radial		Static loaded radius				505 mm							
Recommended rim width				W10		Rolling circumference				3245 mm							
Permitted rim width				W9, W11		SRI				525							
						Tread depth				40 mm							
						75% of the tyre volume				85 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1040	1180	1325	1465	1610	1725	1820	1930								
	10H	860	1000	1135	1275	1365	1440										
	25	890	1030	1170	1310	1410	1480										
	30	860	1000	1135	1275	1365	1440										
	40		955	1085	1210	1300	1370										
	50		915	1040	1160	1250	1315										
	65			990	1105	1190	1250										
	70			900	1005	1080	1140										

For the explanation of the symbols and abbreviations, see the inside of the last page.

360/70 R 24 122 D TL Traxion 70

EAN				8714692360695		Section width				360 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1150 mm							
Tyre construction				Radial		Static loaded radius				545 mm							
Recommended rim width				W11		Rolling circumference				3395 mm							
Permitted rim width				W10, W12		SRI				550							
						Tread depth				42 mm							
						75% of the tyre volume				115 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1245	1410	1585	1750	1925	2060	2180	2310								
	10H	1030	1195	1360	1520	1635	1725										
	25	1060	1235	1400	1570	1685	1780										
	30	1030	1195	1360	1520	1635	1725										
	40		1140	1295	1450	1555	1645										
	50		1095	1240	1390	1495	1575										
	65			1185	1325	1420	1500										
	70			1075	1205	1295	1365										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

380/70 R 24 125 D TL Traxion 70									
EAN		8714692360701			Section width			385 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1185 mm	
Tyre construction		Radial			Static loaded radius			540 mm	
Recommended rim width		W12			Rolling circumference			3495 mm	
Permitted rim width		W11, W12L, W/DW13(L)			SRI			575	
					Tread depth			44 mm	
EAN Tube		8714692239748			75% of the tyre volume			140 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1350	1530	1720	1905	2090	2240	2370	2510
	10H	1120	1300	1480	1655	1775	1895		
	25	1155	1340	1525	1705	1830	1955		
	30	1120	1300	1480	1655	1775	1895		
	40		1240	1405	1575	1690	1805		
	50		1185	1350	1510	1620	1735		
	65			1285	1440	1545	1650		
	70			1170	1310	1405	1500		

For the explanation of the symbols and abbreviations, see the inside of the last page.

420/70 R 24 130 D TL Traxion 70									
EAN		8714692360718			Section width			430 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1240 mm	
Tyre construction		Radial			Static loaded radius			560 mm	
Recommended rim width		W13			Rolling circumference			3675 mm	
Permitted rim width		W12(L), DW13(L), W/DW14L			SRI			600	
		W/DW14L			Tread depth			46 mm	
EAN Tube		8714692239755			75% of the tyre volume			175 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1575	1790	2005	2220	2440	2615	2765	2930
	10H	1305	1515	1725	1930	2075	2185		
	25	1345	1565	1775	1990	2135	2250		
	30	1305	1515	1725	1930	2075	2185		
	40		1445	1640	1840	1975	2080		
	50		1385	1575	1760	1895	1995		
	65			1500	1680	1800	1900		
	70			1365	1525	1640	1730		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

480/70 R 24 138 D TL Traxion 70

EAN				8714692360725		Section width			490 mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1305 mm								
Tyre construction				Radial		Static loaded radius			585 mm								
Recommended rim width				DW15L		Rolling circumference			3850 mm								
Permitted rim width				W/DW14L, W15L, W/DW16L		SRI			625								
						Tread depth			48 mm								
						75% of the tyre volume			240 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1940	2200	2470	2735	3005	3220	3405	3605								
	10H	1610	1870	2125	2375	2555	2715										
	25	1660	1925	2190	2450	2630	2795										
	30	1610	1870	2125	2375	2555	2715										
	40		1780	2020	2265	2430	2585										
	50		1705	1940	2170	2330	2480										
	65			1845	2065	2220	2360										
	70			1680	1880	2020	2150										

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/70 R 28 127 D TL Traxion 70

EAN				8714692360732		Section width				390 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1290 mm							
Tyre construction				Radial		Static loaded radius				590 mm							
Recommended rim width				W12		Rolling circumference				3825 mm							
Permitted rim width				W11, W12L, W13		SRI				625							
						Tread depth				44 mm							
						75% of the tyre volume				155 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1450	1650	1850	2050	2250	2410	2550	2700								
	10H	1205	1400	1590	1780	1910	2010										
	25	1240	1440	1640	1835	1970	2075										
	30	1205	1400	1590	1780	1910	2010										
	40		1330	1515	1695	1820	1915										
	50		1275	1450	1625	1745	1840										
	65			1385	1545	1660	1750										
	70			1260	1410	1510	1595										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

420/70 R 28 133 D TL Traxion 70									
EAN			8714692360749			Section width			430 mm
Nominal tyre pressure			1,6 bar			Overall diameter			1345 mm
Tyre construction			Radial			Static loaded radius			615 mm
Recommended rim width			W13			Rolling circumference			3975 mm
Permitted rim width			W12(L), W/DW14L			SRI			650
						Tread depth			46 mm
EAN Tube			8714692239793			75% of the tyre volume			195 l
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1690	1920	2155	2385	2620	2805	2965	3145
	10H	1405	1630	1850	2070	2225	2370		
	25	1445	1680	1910	2135	2295	2440		
	30	1405	1630	1850	2070	2225	2370		
	40		1550	1765	1975	2120	2255		
	50		1485	1690	1890	2030	2165		
	65			1610	1800	1935	2060		
	70			1465	1640	1760	1875		

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/70 R 28 140 D TL Traxion 70									
EAN		8714692360756			Section width		495 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1405 mm		
Tyre construction		Radial			Static loaded radius		635 mm		
Recommended rim width		DW15L			Rolling circumference		4155 mm		
Permitted rim width		W/DW14L, W15L,			SRI		675		
		W/DW16L			Tread depth		48 mm		
EAN Tube		8714692239809			75% of the tyre volume		255 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2075	2355	2645	2930	3215	3445	3645	3860
	10H	1725	2000	2275	2545	2735	2875		
	25	1775	2060	2345	2620	2815	2965		
	30	1725	2000	2275	2545	2735	2875		
	40		1905	2165	2425	2600	2740		
	50		1825	2075	2325	2495	2625		
	65			1975	2210	2375	2500		
	70			1800	2015	2160	2275		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

480/70 R 30 141 D TL Traxion 70

EAN		8714692360763			Section width			490 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1470 mm	
Tyre construction		Radial			Static loaded radius			665 mm	
Recommended rim width		DW15L			Rolling circumference			4370 mm	
Permitted rim width		W/DW14L, W15L, W/DW16L			SRI			700	
					Tread depth			48 mm	
EAN Tube		8714692331381			75% of the tyre volume			270 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2145	2435	2730	3020	3320	3555	3760	3985
	10H	1780	2065	2345	2625	2820	2960		
	25	1835	2125	2420	2705	2905	3050		
	30	1780	2065	2345	2625	2820	2960		
	40		1965	2235	2500	2685	2820		
	50		1885	2145	2400	2575	2705		
	65			2040	2285	2450	2575		
	70			1855	2080	2230	2345		

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/70 R 34 143 D TL Traxion 70

EAN				8714692360770		Section width				485 mm							
Nominal tyre pressure				1,6 bar		Overall diameter				1575 mm							
Tyre construction				Radial		Static loaded radius				715 mm							
Recommended rim width				DW15L		Rolling circumference				4645 mm							
Permitted rim width				W/DW14L, W15L, W/DW16L		SRI				750							
						Tread depth				52 mm							
						75% of the tyre volume				295 l							
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	2275	2580		2895		3205		3520		3770		3990		4230		
	10H	1885	2190		2490		2785		2990		3135						
	25	1945	2255		2565		2870		3085		3230						
	30	1885	2190		2490		2785		2990		3135						
	40		2085		2370		2650		2850		2985						
	50		2000		2275		2545		2730		2860						
	65				2165		2420		2600		2725						
	70				1970		2205		2365		2480						

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

520/70 R 34 148 D TL Traxion 70									
EAN		8714692360787			Section width			525 mm	
Nominal tyre pressure		1,6 bar			Overall diameter			1640 mm	
Tyre construction		Radial			Static loaded radius			740 mm	
Recommended rim width		DW16L			Rolling circumference			4840 mm	
Permitted rim width		W/DW15L, W16L,			SRI			775	
		W/DW18L			Tread depth			54 mm	
EAN Tube		8714692331411			75% of the tyre volume			360 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2570	2915	3275	3625	3980	4260	4505	4775
	10H	2130	2475	2810	3145	3380	3620		
	25	2195	2550	2900	3245	3485	3735		
	30	2130	2475	2810	3145	3380	3620		
	40		2355	2680	2995	3220	3450		
	50		2260	2570	2875	3085	3310		
	65			2445	2735	2940	3150		
	70			2225	2490	2675	2865		

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/70 R 38 145 D TL Traxion 70									
EAN		8714692360794			Section width		485 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1685 mm		
Tyre construction		Radial			Static loaded radius		765 mm		
Recommended rim width		DW15L			Rolling circumference		5015 mm		
Permitted rim width		W/DW14L, W15L,			SRI		800		
		W/DW16L			Tread depth		52 mm		
EAN Tube		8714692331459			75% of the tyre volume		320 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2400	2725	3060	3385	3720	3980	4210	4465
	10H	1990	2310	2630	2940	3160	3335		
	25	2050	2380	2710	3030	3255	3435		
	30	1990	2310	2630	2940	3160	3335		
	40		2200	2500	2800	3005	3175		
	50		2110	2400	2685	2885	3045		
	65			2285	2555	2745	2900		
	70			2080	2325	2500	2640		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

520/70 R 38 150 D TL Traxion 70

EAN		8714692360800			Section width			540 mm									
Nominal tyre pressure		1,6 bar			Overall diameter			1750 mm									
Tyre construction		Radial			Static loaded radius			790 mm									
Recommended rim width		DW16L			Rolling circumference			5165 mm									
Permitted rim width		W/DW15L, W16L, W/DW18L			SRI			825									
					Tread depth			54 mm									
EAN Tube		8714692331466			75% of the tyre volume			405 l									
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	2750	3120	3500	3875	4255	4560	4820	5110								
	10H	2280	2645	3010	3365	3615	3850										
	25	2350	2725	3100	3470	3725	3970										
	30	2280	2645	3010	3365	3615	3850										
	40		2520	2865	3205	3445	3670										
	50		2415	2745	3075	3300	3520										
	65			2615	2930	3145	3350										
	70			2380	2665	2860	3050										

For the explanation of the symbols and abbreviations, see the inside of the last page.

580/70 R 38 155 D TL Traxion 70

EAN		8714692360817			Section width				595 mm								
Nominal tyre pressure		1,6 bar			Overall diameter				1825 mm								
Tyre construction		Radial			Static loaded radius				820 mm								
Recommended rim width		DW18L			Rolling circumference				5385 mm								
Permitted rim width		W18L			SRI				875								
					Tread depth				56 mm								
EAN Tube		8714692331473			75% of the tyre volume				525 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	3200	3630	4075	4510	4955	5305	5610	5950								
	10H	2655	3080	3500	3920	4210	4455										
	25	2735	3175	3610	4040	4340	4590										
	30	2655	3080	3500	3920	4210	4455										
	40		2935	3335	3730	4010	4245										
	50		2815	3200	3580	3845	4070										
	65			3045	3410	3660	3875										
	70			2770	3100	3330	3525										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

620/70 R 42 166 D TL Traxion 70													
EAN			8714692360824				Section width				625 mm		
Nominal tyre pressure			2,4 bar				Overall diameter				1930 mm		
Tyre construction			Radial				Static loaded radius				885 mm		
Recommended rim width			DW20B				Rolling circumference				5750 mm		
Permitted rim width			W18L, DW18L				SRI				925		
							Tread depth				58 mm		
							75% of the tyre volume				585 l		
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	3715	4215	4730	5235	5750	6160	6515	6905	7195	7445	7745	7950
	10H	3080	3575	4065	4550	4885	5175	5460	5695	5895	6095		
	25	3175	3685	4190	4690	5035	5335	5625	5870	6075	6280		
	30	3080	3575	4065	4550	4885	5175	5460	5695	5895	6095		
	40		3405	3870	4330	4655	4930	5200	5425	5615	5805		
	50		3265	3710	4155	4460	4725	4985	5200	5385	5565		
	65			3535	3955	4250	4500	4745	4950	5130	5300		
	70			3215	3600	3865	4095	4320	4505	4665	4825		

For the explanation of the symbols and abbreviations, see the inside of the last page.



TRACTOR TYRES DRIVE RADIAL



TRAXION 85 II

THE NEW STANDARD FOR MEDIUM
CLASS TRACTORS

FEATURES

- Non-parallel cleats
- Reinforced bead design
- Distinctive curved cleats

BENEFITS

- Excellent self-cleaning and improved traction
- Optimal stability at high speeds
- Improved ride and long lifespan



TRAXION 85 II

Ø	Tyre size	Service description	Nominal inflation pressure (bar)						Pag.	
16	210/95 R 16	110 D	2,8	W7	215	800	360	2415	72	N
18	210/95 R 18	112 D	2,8	W7	220	850	385	2560	72	N
20	280/85 R 20	118 D	2,0	W10	290	985	440	2955	73	N
	320/85 R 20	124 D	2,0	W10	330	1050	470	3160	73	N
24	280/85 R 24	115 A8/B	1,6	W10	290	1085	505	3220	74	
	280/85 R 24	130 A8/B	4	W10	295	1095	515	3320	74	
	320/85 R 24	122 A8/B	1,6	W11	325	1145	530	3400	75	
	340/85 R 24	125 A8/B	1,6	W12	360	1195	545	3520	75	
	380/85 R 24	131 A8/B	1,6	W13	400	1250	565	3670	76	
	420/85 R 24	137 A8/B	1,6	DW15L	450	1315	590	3850	76	
28	280/85 R 28	118 A8/B	1,6	W10	280	1195	555	3545	77	
	320/85 R 28	124 A8/B	1,6	W11	330	1250	575	3700	77	
	340/85 R 28	127 A8/B	1,6	W12	355	1290	590	3815	78	
	380/85 R 28	133 A8/B	1,6	W13	400	1350	610	3980	78	
	380/85 R 28	145 A8/B	3,2	W13	395	1350	610	4020	79	
	420/85 R 28	139 A8/B	1,6	DW15L	450	1415	635	4180	79	
30	380/85 R 30	135 A8/B	1,6	W12	385	1410	640	4155	80	
	420/85 R 30	140 A8/B	1,6	DW15L	450	1470	660	4330	80	
	460/85 R 30	145 A8/B	1,6	DW16L	490	1545	690	4560	81	
34	380/85 R 34	137 A8/B	1,6	W12	390	1505	680	4475	81	
	420/85 R 34	142 A8/B	1,6	DW15L	450	1575	710	4650	82	
	460/85 R 34	147 A8/B	1,6	DW16L	490	1645	740	4855	82	
38	340/85 R 38	133 A8/B	1,6	W12	355	1555	705	4620	83	
	380/80 R 38	142 A8/B	2,4	W12	390*	1580*	735*	4820*	83	
	420/85 R 38	144 A8/B	1,6	DW15L	450	1680	760	4990	84	
	460/85 R 38	149 A8/B	1,6	DW16L	490	1755	790	5195	84	
	520/85 R 38	155 A8/B	1,6	DW18L	555	1845	825	5435	85	
42	480/80 R 42	156 A8/B	2,4	DW16L	500*	1850*	855*	5600*	85	
	520/85 R 42	157 A8/B	1,6	DW18L	550	1935	865	5710	86	
46	480/80 R 46	158 A8/B	2,4	DW16L	500*	1950*	900*	5885*	86	
	520/85 R 46	158 A8/B	1,6	DW16 L	535*	2050*	930*	6150*	87	
50	480/80 R 50	159 A8/B	2,4	DW16L	500*	2045*	950*	6225*	87	

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

TRACTOR TYRES

DRIVE RADIAL

210/95 R 16 110 D TL Traxion 85 II

EAN		8714692805493					Section width					215 mm				
Nominal tyre pressure		2,8 bar					Overall diameter					800 mm				
Tyre construction		Radial					Static loaded radius					360 mm				
Recommended rim width		W7					Rolling circumference					2415 mm				
Permitted rim width		5.50F, 6.00F, W6, 6.00F					SRI					380				
Alternative tyre size		7.50 R 16					Tread depth					32 mm				
							75% of the tyre volume					39 l				
		Tyre pressure (bar)														
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,00	3,20	
		Load capacity per tyre(kg)														
Speed (km/h)	10L	585	665	750	830	910	975	1030	1105	1190	1280	1350	1425	1510	1590	
	10H	485	565	645	720	770	815	895	970	1030	1095	1160	1220			
	25	500	585	660	740	795	840	920	1000	1060	1125	1195	1255			
	30	485	565	645	720	770	815	895	970	1030	1095	1160	1220			
	40		540	610	685	735	775	850	925	980	1040	1105	1160			
	50		515	585	655	705	745	815	885	940	1000	1060	1115			
	65			560	625	670	710	780	845	895	950	1010	1060			
	70			510	570	610	645	710	765	815	865	915	965			

For the explanation of the symbols and abbreviations, see the inside of the last page.

210/95 R 18 112 D TL Traxion 85 II

EAN		8714692805509						Section width						220 mm			
Nominal tyre pressure		2,8 bar						Overall diameter						850 mm			
Tyre construction		Radial						Static loaded radius						385 mm			
Recommended rim width		W7						Rolling circumference						2560 mm			
Permitted rim width		5.50F, 6.00F, W6, 6.00F						SRI						410			
Alternative tyre size		7.50 R 18						Tread depth						32 mm			
								75% of the tyre volume						41 l			
		Tyre pressure (bar)															
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,00	3,20		
		Load capacity per tyre(kg)															
Speed (km/h)	10L	620	705	790	875	960	1030	1085	1165	1255	1350	1425	1500	1595	1680		
	10H	515	595	680	760	815	860	945	1025	1085	1150	1225	1290				
	25	530	615	700	780	840	890	975	1055	1120	1185	1260	1325				
	30	515	595	680	760	815	860	945	1025	1085	1150	1225	1290				
	40		570	645	725	775	820	900	975	1035	1095	1165	1225				
	50		545	620	695	745	790	860	935	990	1050	1115	1175				
	65			590	660	710	750	820	890	945	1000	1065	1120				
	70			535	600	645	685	745	810	860	910	970	1020				

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

280/85 R 20 118 D TL Traxion 85 II

EAN	8714692805516	Section width	290 mm
Nominal tyre pressure	2,0 bar	Overall diameter	985 mm
Tyre construction	Radial	Static loaded radius	440 mm
Recommended rim width	W10	Rolling circumference	2955 mm
Permitted rim width	W8, W9	SRI	475
Alternative tyre size	11.2 R 20	Tread depth	37 mm
		75% of the tyre volume	81 l

		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
Load capacity per tyre(kg)											
Speed (km/h)	10L	920	1045	1170	1295	1425	1525	1610	1730	1865	1980
	10H	765	885	1005	1125	1210	1290	1400	1520		
	25	785	910	1035	1160	1245	1325	1445	1565		
	30	765	885	1005	1125	1210	1290	1400	1520		
	40		845	960	1070	1150	1225	1335	1445		
	50		810	920	1030	1105	1175	1280	1385		
	65			875	980	1050	1120	1220	1320		
	70			795	890	955	1020	1110	1200		

For the explanation of the symbols and abbreviations, see the inside of the last page.

320/85 R 20 124 D TL Traxion 85 II

EAN	8714692805523	Section width	330 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1050 mm
Tyre construction	Radial	Static loaded radius	470 mm
Recommended rim width	W11	Rolling circumference	3160 mm
Permitted rim width	W9, W10, DW11	SRI	500
Alternative tyre size	12.4 R 20	Tread depth	40 mm
		75% of the tyre volume	110 l

		Tyre pressure (bar)									
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40
Load capacity per tyre(kg)											
Speed (km/h)	10L	1130	1285	1440	1595	1750	1875	1985	2130	2295	2400
	10H	940	1090	1240	1385	1490	1565	1725	1840		
	25	965	1120	1275	1430	1535	1610	1775	1895		
	30	940	1090	1240	1385	1490	1565	1725	1840		
	40		1035	1180	1320	1415	1490	1640	1750		
	50		995	1130	1265	1360	1430	1575	1680		
	65			1075	1205	1295	1360	1500	1600		
	70			980	1095	1180	1240	1365	1455		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

280/85 R 24 115 A8/B TL Traxion 85 II

EAN		8714692344664			Section width		290 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1085 mm		
Tyre construction		Radial			Static loaded radius		505 mm		
Recommended rim width		W10			Rolling circumference		3220 mm		
Permitted rim width		W9			SRI		525		
Alternative tyre size		11.2 R 24			Tread depth		38 mm		
EAN Tube		8714692239724			75% of the tyre volume		75 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1000	1135	1275	1410	1550	1660	1755	1860
	10H	775	895	1020	1140	1225	1300		
	25	800	930	1055	1185	1270	1350		
	30	775	895	1020	1140	1225	1300		
	40		840	955	1065	1145	1215		
	50		840	955	1065	1145	1215		

For the explanation of the symbols and abbreviations, see the inside of the last page.

280/85 R 24 130 A8/B TL Traxion 85 II

EAN		8714692350566		Section width		295 mm				
Nominal tyre pressure		4,0 bar		Overall diameter		1095 mm				
Tyre construction		Radial		Static loaded radius		515 mm				
Recommended rim width		W10		Rolling circumference		3320 mm				
Permitted rim width		W9		SRI		525				
Alternative tyre size		11.2 R 24		Tread depth		38 mm				
EAN Tube		8714692239724		75% of the tyre volume		75 l				
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10L	1165	1385	1610	1860	2005	2100	2265	2430	2520
	10H	925	1095	1300	1430	1500	1665	1800	1915	2035
	25	955	1135	1350	1480	1555	1730	1865	1990	2110
	30	925	1095	1300	1430	1500	1665	1800	1915	2035
	40		1025	1215	1335	1400	1555	1680	1790	1900
	50		1025	1215	1335	1400	1555	1680	1790	1900

For the explanation of the symbols and abbreviations, see the inside of the last page.

74

REDESTEIN
TYRES

TRACTOR TYRES DRIVE RADIAL

320/85 R 24 122 A8/B TL Traxion 85 II

EAN		8714692344718				Section width			325 mm
Nominal tyre pressure		1,6 bar				Overall diameter			1145 mm
Tyre construction		Radial				Static loaded radius			530 mm
Recommended rim width		W11				Rolling circumference			3400 mm
Permitted rim width		W9, W/DW10				SRI			550
Alternative tyre size		12.4 R 24				Tread depth			41 mm
EAN Tube		8714692239731				75% of the tyre volume			100 l
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1225	1395	1565	1730	1900	2035	2155	2280
	10H	950	1100	1250	1400	1505	1605		
	25	985	1140	1295	1450	1560	1665		
	30	950	1100	1250	1400	1505	1605		
	40		1030	1170	1310	1405	1500		
	50		1030	1170	1310	1405	1500		

For the explanation of the symbols and abbreviations, see the inside of the last page.

340/85 R 24 125 A8/B TL Traxion 85 II

EAN		8714692350580				Section width			360 mm								
Nominal tyre pressure		1,6 bar				Overall diameter			1195 mm								
Tyre construction		Radial				Static loaded radius			545 mm								
Recommended rim width		W12				Rolling circumference			3520 mm								
Permitted rim width		W11, W12L				SRI			575								
Alternative tyre size		13.6 R 24				Tread depth			43 mm								
EAN Tube		8714692239748				75% of the tyre volume			125 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1350	1530	1715	1900	2085	2235	2365	2505								
	10H	1040	1210	1375	1535	1650	1765										
	25	1080	1255	1425	1595	1710	1830										
	30	1040	1210	1375	1535	1650	1765										
	40		1130	1285	1435	1540	1650										
	50		1130	1285	1435	1540	1650										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

380/85 R 24 131 A8/B TL Traxion 85 II

EAN		8714692350597			Section width		400 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1250 mm		
Tyre construction		Radial			Static loaded radius		565 mm		
Recommended rim width		W13			Rolling circumference		3670 mm		
Permitted rim width		W11, W12(L), DW13(L)			SRI		600		
Alternative tyre size		14.9 R 24			Tread depth		45 mm		
EAN Tube		8714692239755			75% of the tyre volume		155 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1600	1820	2040	2260	2480	2660	2810	2980
	10H	1235	1435	1630	1825	1960	2085		
	25	1285	1490	1695	1895	2035	2165		
	30	1235	1435	1630	1825	1960	2085		
	40		1340	1525	1705	1835	1950		
	50		1340	1525	1705	1835	1950		

For the explanation of the symbols and abbreviations, see the inside of the last page.

420/85 R 24 137 A8/B TL Traxion 85 II

EAN		8714692344800			Section width		450 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1315 mm		
Tyre construction		Radial			Static loaded radius		590 mm		
Recommended rim width		DW15L			Rolling circumference		3850 mm		
Permitted rim width		W/DW13(L), W/DW14L, W15L			SRI		625		
Alternative tyre size		16.9 R 24			Tread depth		47 mm		
EAN Tube		8714692239755			75% of the tyre volume		210 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1875	2130	2390	2645	2905	3110	3290	3485
	10H	1450	1680	1910	2140	2295	2460		
	25	1500	1745	1980	2220	2380	2555		
	30	1450	1680	1910	2140	2295	2460		
	40		1570	1785	2000	2145	2300		
	50		1570	1785	2000	2145	2300		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

280/85 R 28 118 A8/B TL Traxion 85 II

EAN		8714692350573				Section width			280 mm	
Nominal tyre pressure		1,6 bar				Overall diameter			1195 mm	
Tyre construction		Radial				Static loaded radius			555 mm	
Recommended rim width		W10				Rolling circumference			3545 mm	
Permitted rim width		W9				SRI			575	
Alternative tyre size		11.2 R 28				Tread depth			38 mm	
EAN Tube		8714692239762				75% of the tyre volume			90 l	
		Tyre pressure (bar)								
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10L	1080	1225	1375	1520	1670	1790	1895	2005	
	10H	835	965	1100	1230	1320	1410			
	25	865	1005	1140	1275	1370	1465			
	30	835	965	1100	1230	1320	1410			
	40		905	1025	1150	1235	1320			
	50		905	1025	1150	1235	1320			

For the explanation of the symbols and abbreviations, see the inside of the last page.

320/85 R 28 124 A8/B TL Traxion 85 II

EAN		8714692344725				Section width			330 mm								
Nominal tyre pressure		1,6 bar				Overall diameter			1250 mm								
Tyre construction		Radial				Static loaded radius			575 mm								
Recommended rim width		W11				Rolling circumference			3700 mm								
Permitted rim width		W9, W/DW10				SRI			600								
Alternative tyre size		12.4 R 28				Tread depth			41 mm								
EAN Tube		8714692239779				75% of the tyre volume			115 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1320	1500	1680	1860	2045	2190	2315	2455								
	10H	1020	1185	1345	1505	1615	1710										
	25	1055	1225	1395	1560	1675	1775										
	30	1020	1185	1345	1505	1615	1710										
	40		1105	1255	1405	1510	1600										
	50		1105	1255	1405	1510	1600										

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

340/85 R 28 127 A8/B TL Traxion 85 II

EAN		8714692344749				Section width		355 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1290 mm	
Tyre construction		Radial				Static loaded radius		590 mm	
Recommended rim width		W12				Rolling circumference		3815 mm	
Permitted rim width		W11, W12L				SRI		625	
Alternative tyre size		13.6 R 28				Tread depth		43 mm	
EAN Tube		8714692239786				75% of the tyre volume		135 l	
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1445	1645	1845	2040	2240	2400	2540	2690
	10H	1120	1295	1475	1650	1770	1875		
	25	1160	1345	1530	1710	1840	1945		
	30	1120	1295	1475	1650	1770	1875		
	40		1210	1380	1540	1655	1750		
	50		1210	1380	1540	1655	1750		

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/85 R 28 133 A8/B TL Traxion 85 II

EAN		8714692344770			Section width		400 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1350 mm		
Tyre construction		Radial			Static loaded radius		610 mm		
Recommended rim width		W13			Rolling circumference		3980 mm		
Permitted rim width		W11, W12(L)			SRI		650		
Alternative tyre size		14.9 R 28			Tread depth		44 mm		
EAN Tube		8714692239793			75% of the tyre volume		175 l		
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1715	1950	2185	2420	2660	2850	3010	3190
	10H	1325	1540	1750	1955	2100	2205		
	25	1375	1595	1815	2030	2180	2285		
	30	1325	1540	1750	1955	2100	2205		
	40		1440	1635	1830	1965	2060		
	50		1440	1635	1830	1965	2060		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

380/85 R 28 145 A8/B TL Traxion 85 II

EAN	8714692800610	Section width	395 mm
Nominal tyre pressure	3,2 bar	Overall diameter	1350 mm
Tyre construction	Radial	Static loaded radius	610 mm
Recommended rim width	W13	Rolling circumference	4020 mm
Permitted rim width	W11, W12(L)	SRI	650
		Tread depth	44 mm
Alternative tyre size	14.9 R 28	75% of the tyre volume	175 l
EAN Tube	8714692239793		

		Tyre pressure (bar)							
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1995	2375	2760	3190	3440	3645	3890	4170
	10H	1585	1880	2205	2450	2600	2860	3105	
	25	1640	1950	2285	2540	2695	2965	3220	
	30	1585	1880	2205	2450	2600	2860	3105	
	40		1755	2060	2290	2430	2670	2900	
	50		1755	2060	2290	2430	2670	2900	

For the explanation of the symbols and abbreviations, see the inside of the last page.

420/85 R 28 139 A8/B TL Traxion 85 II

EAN	8714692344817	Section width	450 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1415 mm
Tyre construction	Radial	Static loaded radius	635 mm
Recommended rim width	DW15L	Rolling circumference	4180 mm
Permitted rim width	W13, W/DW14L, W15L	SRI	675
		Tread depth	47 mm
Alternative tyre size	16.9 R 28	75% of the tyre volume	235 l
EAN Tube	8714692239809		

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2005	2275	2555	2825	3105	3325	3515	3725
	10H	1550	1795	2040	2285	2455	2600		
	25	1605	1865	2120	2370	2545	2695		
	30	1550	1795	2040	2285	2455	2600		
	40		1680	1910	2135	2295	2430		
	50		1680	1910	2135	2295	2430		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

380/85 R 30 135 A8/B TL Traxion 85 II

EAN		8714692336591			Section width			385 mm									
Nominal tyre pressure		1,6 bar			Overall diameter			1410 mm									
Tyre construction		Radial			Static loaded radius			640 mm									
Recommended rim width		W12			Rolling circumference			4155 mm									
Permitted rim width		W11, W13			SRI			675									
Alternative tyre size		14.9 R 30			Tread depth			44 mm									
					75% of the tyre volume			230 l									
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1770	2010	2260	2500	2745	2940	3110	3295								
	10H	1370	1590	1805	2020	2170	2335										
	25	1420	1650	1875	2095	2250	2420										
	30	1370	1590	1805	2020	2170	2335										
	40		1485	1685	1890	2030	2180										
	50		1485	1685	1890	2030	2180										

For the explanation of the symbols and abbreviations, see the inside of the last page.

420/85 R 30 140 A8/B TL Traxion 85 II

EAN	8714692344824	Section width	450 mm						
Nominal tyre pressure	1,6 bar	Overall diameter	1470 mm						
Tyre construction	Radial	Static loaded radius	660 mm						
Recommended rim width	DW15L	Rolling circumference	4330 mm						
Permitted rim width	W13, W/DW14L, W15L	SRI	700						
Alternative tyre size	16.9 R 30	Tread depth	47 mm						
EAN Tube	8714692331381	75% of the tyre volume	245 l						
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2070	2345	2635	2915	3200	3430	3625	3845
	10H	1595	1855	2105	2355	2530	2675		
	25	1655	1920	2185	2445	2625	2775		
	30	1595	1855	2105	2355	2530	2675		
	40		1730	1970	2205	2365	2500		
	50		1730	1970	2205	2365	2500		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

460/85 R 30 145 A8/B TL Traxion 85 II

EAN	8714692350610	Section width	490 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1545 mm
Tyre construction	Radial	Static loaded radius	690 mm
Recommended rim width	DW15L	Rolling circumference	4560 mm
Permitted rim width	DW13, W/DW14L, W15L	SRI	725
Alternative tyre size	18.4 R 30	Tread depth	49 mm
EAN Tube	8714692331527	75% of the tyre volume	330 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2380	2705	3035	3360	3690	3950	4175	4430
	10H	1840	2135	2425	2715	2915	3105		
	25	1905	2215	2515	2815	3025	3220		
	30	1840	2135	2425	2715	2915	3105		
	40		1995	2265	2535	2725	2900		
	50		1995	2265	2535	2725	2900		

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/85 R 34 137 A8/B TL Traxion 85 II

EAN	8714692336607	Section width	390 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1505 mm
Tyre construction	Radial	Static loaded radius	680 mm
Recommended rim width	W12	Rolling circumference	4475 mm
Permitted rim width	W11, W13	SRI	725
Alternative tyre size	14.9 R 34	Tread depth	44 mm
		75% of the tyre volume	250 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	1880	2135	2395	2655	2915	3120	3300	3500
	10H	1455	1685	1915	2145	2305	2460		
	25	1505	1750	1990	2225	2390	2555		
	30	1455	1685	1915	2145	2305	2460		
	40		1575	1790	2005	2155	2300		
	50		1575	1790	2005	2155	2300		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE RADIAL

420/85 R 34 142 A8/B TL Traxion 85 II

EAN	8714692350603	Section width	450 mm						
Nominal tyre pressure	1,6 bar	Overall diameter	1575 mm						
Tyre construction	Radial	Static loaded radius	710 mm						
Recommended rim width	DW15L	Rolling circumference	4650 mm						
Permitted rim width	W/DW13,	SRI	750						
	W/DW14L, W15L	Tread depth	47 mm						
Alternative tyre size	16.9 R 34	75% of the tyre volume	265 l						
EAN Tube	8714692331404								
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2190	2485	2790	3090	3395	3635	3845	4075
	10H	1690	1965	2230	2495	2680	2835		
	25	1755	2035	2315	2590	2785	2940		
	30	1690	1965	2230	2495	2680	2835		
	40		1835	2085	2335	2505	2650		
	50		1835	2085	2335	2505	2650		

For the explanation of the symbols and abbreviations, see the inside of the last page.

460/85 R 34 147 A8/B TL Traxion 85 II

EAN		8714692350627				Section width		490 mm	
Nominal tyre pressure		1,6 bar				Overall diameter		1645 mm	
Tyre construction		Radial				Static loaded radius		740 mm	
Recommended rim width		DW16L				Rolling circumference		4855 mm	
Permitted rim width		W/DW14L,				SRI		775	
		W/DW15L, W16L				Tread depth		49 mm	
Alternative tyre size		18.4 R 34				75% of the tyre volume		340 l	
EAN Tube		8714692331411							
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2520	2860	3210	3550	3900	4180	4420	4685
	10H	1945	2255	2565	2870	3085	3290		
	25	2020	2340	2660	2980	3200	3415		
	30	1945	2255	2565	2870	3085	3290		
	40		2110	2400	2685	2885	3075		
	50		2110	2400	2685	2885	3075		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

340/85 R 38 133 A8/B TL Traxion 85 II

EAN				8714692623745		Section width			355 mm								
Nominal tyre pressure				1,6 bar		Overall diameter			1555 mm								
Tyre construction				Radial		Static loaded radius			705 mm								
Recommended rim width				W12		Rolling circumference			4620 mm								
Permitted rim width				W11,DW12		SRI			750								
Alternative tyre size				13.6 R 38		Tread depth			43 mm								
EAN Tube				8714692331442		75% of the tyre volume			170 l								
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	1685	1910	2145	2375	2605	2790	2955	3130								
	10H	1300	1510	1715	1920	2060	2205										
	25	1350	1565	1780	1990	2140	2285										
	30	1300	1510	1715	1920	2060	2205										
	40		1410	1600	1795	1925	2060										
	50		1410	1600	1795	1925	2060										

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/80 R 38 142 A8/B TL Traxion 85 II

EAN				8714692623752				Section width				390* mm													
Nominal tyre pressure				2,4 bar				Overall diameter				1580* mm													
Tyre construction				Radial				Static loaded radius				735* mm													
Recommended rim width				W12				Rolling circumference				4820* mm													
Permitted rim width				W11, W13				SRI				750													
Alternative tyre size				14.9 R 38				Tread depth				43 mm													
								75% of the tyre volume				260 l													
		Tyre pressure (bar)																							
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00		2,20		2,40		2,60		2,80	
		Load capacity per tyre(kg)																							
Speed (km/h)	10L	1890	2145	2410	2665	2925	3135	3315	3515	3660	3790	3945	3975												
	10H	1460	1695	1925	2155	2315	2460	2585	2695	2795	2835														
	25	1515	1755	1995	2235	2400	2555	2680	2800	2895	2940														
	30	1460	1695	1925	2155	2315	2460	2585	2695	2795	2835														
	40			1800	2015	2160	2300	2415	2520	2610	2650														
	50			1800	2015	2160	2300	2415	2520	2610	2650														

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

TRACTOR TYRES

DRIVE RADIAL

420/85 R 38 144 A8/B TL Traxion 85 II

EAN		8714692623769			Section width		450 mm										
Nominal tyre pressure		1,6 bar			Overall diameter		1680 mm										
Tyre construction		Radial			Static loaded radius		760 mm										
Recommended rim width		DW15L			Rolling circumference		4990 mm										
Permitted rim width		W/DW14L, W15L			SRI		800										
Alternative tyre size		16.9 R 38			Tread depth		47 mm										
EAN Tube		8714692331459			75% of the tyre volume		290 l										
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	2310	2625	2945	3260	3580	3835	4055	4295								
	10H	1785	2070	2355	2635	2830	2995										
	25	1850	2150	2440	2735	2935	3110										
	30	1785	2070	2355	2635	2830	2995										
	40		1935	2200	2460	2645	2800										
	50		1935	2200	2460	2645	2800										

For the explanation of the symbols and abbreviations, see the inside of the last page.

460/85 R 38 149 A8/B TL Traxion 85 II

EAN		8714692623776			Section width		490 mm		
Nominal tyre pressure		1,6 bar			Overall diameter		1755 mm		
Tyre construction		Radial			Static loaded radius		790 mm		
Recommended rim width		DW16L			Rolling circumference		5195 mm		
Permitted rim width		W/DW14L,			SRI		825		
		W/DW15L, W16L			Tread depth		49 mm		
Alternative tyre size		18.4 R 38			75% of the tyre volume		365 l		
EAN Tube		8714692331466							
		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	2655	3010	3380	3740	4110	4400	4655	4935
	10H	2050	2380	2705	3025	3250	3480		
	25	2125	2465	2805	3140	3370	3610		
	30	2050	2380	2705	3025	3250	3480		
	40		2220	2525	2825	3035	3250		
	50		2220	2525	2825	3035	3250		

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES DRIVE RADIAL

520/85 R 38 155 A8/B TL Traxion 85 II

EAN	8714692623813	Section width	555 mm
Nominal tyre pressure	1,6 bar	Overall diameter	1845 mm
Tyre construction	Radial	Static loaded radius	825 mm
Recommended rim width	DW18L	Rolling circumference	5435 mm
Permitted rim width	DD16L, W/DW16L, W18L	SRI	875
Alternative tyre size	20.8 R 38	Tread depth	54 mm
EAN Tube	8714692331473	75% of the tyre volume	490 l

		Tyre pressure (bar)							
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00
		Load capacity per tyre(kg)							
Speed (km/h)	10L	3200	3635	4080	4515	4960	5315	5620	5955
	10H	2475	2870	3260	3650	3920	4145		
	25	2565	2975	3385	3785	4070	4300		
	30	2475	2870	3260	3650	3920	4145		
	40		2680	3050	3410	3665	3875		
	50		2680	3050	3410	3665	3875		

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/80 R 42 156 A8/B TL Traxion 85 II

EAN	8714692623783	Section width	500* mm
Nominal tyre pressure	2,4 bar	Overall diameter	1850* mm
Tyre construction	Radial	Static loaded radius	855* mm
Recommended rim width	DW16L	Rolling circumference	5600* mm
Permitted rim width	DD16L, W16L, W/DW16A*	SRI	875
Alternative tyre size	18.4 R 42	Tread depth	49 mm
		75% of the tyre volume	490 l

		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10L	2820	3200	3595	3980	4370	4680	4950	5245	5465	5655	5885	6000
	10H	2180	2530	2875	3215	3455	3690	3860	4025	4170	4280		
	25	2260	2620	2980	3335	3585	3830	4005	4175	4325	4440		
	30	2180	2530	2875	3215	3455	3690	3860	4025	4170	4280		
	40			2685	3005	3230	3450	3605	3760	3895	4000		
	50			2685	3005	3230	3450	3605	3760	3895	4000		

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

TRACTOR TYRES

DRIVE RADIAL

520/85 R 42 157 A8/B TL Traxion 85 II

EAN		8714692623820			Section width		550 mm										
Nominal tyre pressure		1,6 bar			Overall diameter		1935 mm										
Tyre construction		Radial			Static loaded radius		865 mm										
Recommended rim width		DW18L			Rolling circumference		5710 mm										
Permitted rim width		DW16L, DD18L			SRI		925										
Alternative tyre size		20.8 R 42			Tread depth		54 mm										
					75% of the tyre volume		510 l										
		Tyre pressure (bar)															
		0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10L	3355	3810	4275	4730	5195	5565	5885	6240								
	10H	2590	3005	3415	3825	4105	4415										
	25	2685	3120	3545	3965	4260	4580										
	30	2590	3005	3415	3825	4105	4415										
	40		2810	3195	3575	3840	4125										
	50		2810	3195	3575	3840	4125										

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/80 R 46 158 A8/B TL Traxion 85 II

EAN				8714692623790				Section width				500* mm			
Nominal tyre pressure				2,4 bar				Overall diameter				1950* mm			
Tyre construction				Radial				Static loaded radius				900* mm			
Recommended rim width				DW16L				Rolling circumference				5885* mm			
Permitted rim width				DD16L, W16L, W/DW16A*				SRI				925			
Alternative tyre size				18.4 R 46				Tread depth				49 mm			
								75% of the tyre volume				525 l			
		Tyre pressure (bar)													
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80		
		Load capacity per tyre(kg)													
Speed (km/h)	10L	2950	3350	3760	4160	4570	4895	5175	5490	5720	5915	6155	6375		
	10H	2280	2645	3005	3365	3615	3800	4035	4210	4360	4550				
	25	2365	2745	3120	3490	3750	3940	4190	4370	4525	4720				
	30	2280	2645	3005	3365	3615	3800	4035	4210	4360	4550				
	40			2810	3145	3375	3550	3775	3935	4075	4250				
	50			2810	3145	3375	3550	3775	3935	4075	4250				

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

TRACTOR TYRES DRIVE RADIAL

520/85 R 46 158 A8/B TL Traxion 85 II

EAN			8714692623837			Section width			535* mm									
Nominal tyre pressure			1,6 bar			Overall diameter			2050* mm									
Tyre construction			Radial			Static loaded radius			930* mm									
Recommended rim width			DW16L			Rolling circumference			6150* mm									
Permitted rim width			DW18L			SRI			975									
Alternative tyre size			20.8 R 46			Tread depth			51 mm									
						75% of the tyre volume			650 l									
			Tyre pressure (bar)															
			0,60		0,80		1,00		1,20		1,40		1,60		1,80		2,00	
			Load capacity per tyre(kg)															
Speed (km/h)	10L	3505	3975	4465	4940	5425	5810	6145	6515									
	10H	2705	3140	3570	3995	4290	4550											
	25	2805	3255	3705	4145	4450	4720											
	30	2705	3140	3570	3995	4290	4550											
	40		2935	3335	3735	4010	4250											
	50		2935	3335	3735	4010	4250											

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

480/80 R 50 159 A8/B TL Traxion 85 II

EAN			8714692623806					Section width				500* mm		
Nominal tyre pressure			2,4 bar					Overall diameter				2045* mm		
Tyre construction			Radial					Static loaded radius				950* mm		
Recommended rim width			DW16L					Rolling circumference				6225* mm		
Permitted rim width			DWL14L, W/DW15L, W16L					SRI				975		
Alternative tyre size			18.4 R 50					Tread depth				49 mm		
								75% of the tyre volume				550 l		
		Tyre pressure (bar)												
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)												
Speed (km/h)	10L	3080	3495	3925	4340	4770	5105	5400	5725	5965	6175	6425	6565	
	10H	2375	2760	3135	3510	3770	4015	4210	4395	4550	4680			
	25	2465	2860	3255	3640	3910	4165	4370	4560	4720	4855			
	30	2375	2760	3135	3510	3770	4015	4210	4395	4550	4680			
	40			2930	3280	3525	3750	3935	4105	4250	4375			
	50			2930	3280	3525	3750	3935	4105	4250	4375			

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

TRACTOR TYRES DRIVE BIAS —



FAKTOR-S

THE PERFECT CHOICE
FOR LIGHT TRACTORS

FEATURES

Strong nylon carcass

Wide, long cleats

Sturdy sidewall structure

BENEFITS

Durability, reliability and stability

Very comfortable ride

Resistance to external damage



FAKTOR-S

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
24	9.5 - 24	TT	8	112 A8	2,8	W8	240	1050	490	3150	90
	11.2 - 24	TT	8	116 A8	2,4	DW10	290	1100	515	3305	90
	12.4 - 24	TT	8	121 A8	2,3	W11	315	1160	540	3475	90
	13.6 - 24	TT	8	123 A8	2,0	W12	345	1205	560	3615	90
	14.9 - 24	TT	8	128 A8	1,8	W13	375	1260	590	3780	90
28	11.2 - 28	TT	8	118 A8	2,4	DW10	285	1205	560	3615	91
	12.4 - 28	TT	8	123 A8	2,3	W11	315	1260	590	3780	91
	13.6 - 28	TT	8	125 A8	2,0	W12	340	1305	610	3920	91
	14.9 - 28	TT	8	130 A8	1,8	W13	375	1360	635	4080	91
	16.9 - 28	TT	10	139 A8	2,0	DW15L	430	1435	670	4305	91
30	16.9 - 30	TT	8	137 A8	1,7	DW15L	430	1485	690	4450	92
	18.4 - 30	TT	12	149 A8	1,4	DW16L	465	1545	720	4630	92
32	12.4 - 32	TT	8	125 A8	2,2	W11	315	1360	635	4080	92
34	16.9 - 34	TT	8	139 A8	1,7	DW15L	430	1580	735	4745	92
	18.4 - 34	TT	8	142 A8	1,4	DW16L	465	1645	765	4940	92

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

DRIVE BIAS —

9.5 - 24 8 PR / 112 A8 TT FAKTOR-S

EAN	8714692291920	Section width	240 mm
Nominal tyre pressure	2,8 bar	Overall diameter	1050 mm
Tyre construction	Bias	Static loaded radius	490 mm
Recommended rim width	W8	Rolling circumference	3150 mm
Permitted rim width	W7	Load capacity at 10 km/h	1800 kg
Tread depth	29 mm	Load capacity at 30 km/h	1200 kg
EAN Tube	8714692320576	Load capacity at 40 km/h	1120 kg

11.2 - 24 8 PR / 116 A8 TT FAKTOR-S

EAN	8714692291937	Section width	290 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1100 mm
Tyre construction	Bias	Static loaded radius	515 mm
Recommended rim width	DW10	Rolling circumference	3305 mm
Permitted rim width	W9, W10	Load capacity at 10 km/h	2010 kg
Tread depth	29 mm	Load capacity at 30 km/h	1340 kg
EAN Tube	8714692285646	Load capacity at 40 km/h	1250 kg

12.4 - 24 8 PR / 121 A8 TT FAKTOR-S

EAN	8714692291944	Section width	315 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1160 mm
Tyre construction	Bias	Static loaded radius	540 mm
Recommended rim width	W11	Rolling circumference	3475 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2325 kg
Tread depth	33 mm	Load capacity at 30 km/h	1550 kg
EAN Tube	8714692285653	Load capacity at 40 km/h	1450 kg

13.6 - 24 8 PR / 123 A8 TT FAKTOR-S

EAN	8714692319686	Section width	345 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1205 mm
Tyre construction	Bias	Static loaded radius	560 mm
Recommended rim width	W12	Rolling circumference	3615 mm
Permitted rim width	W11, W12L	Load capacity at 10 km/h	2490 kg
Tread depth	36 mm	Load capacity at 30 km/h	1660 kg
EAN Tube	8714692285660	Load capacity at 40 km/h	1550 kg

14.9 - 24 8 PR / 128 A8 TT FAKTOR-S

EAN	8714692291951	Section width	375 mm
Nominal tyre pressure	1,8 bar	Overall diameter	1260 mm
Tyre construction	Bias	Static loaded radius	590 mm
Recommended rim width	W13	Rolling circumference	3780 mm
Permitted rim width	W11, W12(L), DW13(L)	Load capacity at 10 km/h	2890 kg
Tread depth	36 mm	Load capacity at 30 km/h	1925 kg
EAN Tube	8714692285677	Load capacity at 40 km/h	1800 kg

TRACTOR TYRES — DRIVE BIAS

11.2 - 28 8 PR / 118 A8 TT FAKTOR-S

EAN	8714692291968	Section width	285 mm
Nominal tyre pressure	2,4 bar	Overall diameter	1205 mm
Tyre construction	Bias	Static loaded radius	560 mm
Recommended rim width	DW10	Rolling circumference	3615 mm
Permitted rim width	W9, W10	Load capacity at 10 km/h	2115 kg
Tread depth	34 mm	Load capacity at 30 km/h	1410 kg
EAN Tube	8714692285684	Load capacity at 40 km/h	1320 kg

12.4 - 28 8 PR / 123 A8 TT FAKTOR-S

EAN	8714692291975	Section width	315 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1260 mm
Tyre construction	Bias	Static loaded radius	590 mm
Recommended rim width	W11	Rolling circumference	3780 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2490 kg
Tread depth	33 mm	Load capacity at 30 km/h	1660 kg
EAN Tube	8714692285691	Load capacity at 40 km/h	1550 kg

13.6 - 28 8 PR / 125 A8 TT FAKTOR-S

EAN	8714692291982	Section width	340 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1305 mm
Tyre construction	Bias	Static loaded radius	610 mm
Recommended rim width	W12	Rolling circumference	3920 mm
Permitted rim width	W11, W12L	Load capacity at 10 km/h	2650 kg
Tread depth	36 mm	Load capacity at 30 km/h	1765 kg
EAN Tube	8714692285707	Load capacity at 40 km/h	1650 kg

14.9 - 28 8 PR / 130 A8 TT FAKTOR-S

EAN	8714692291999	Section width	375 mm
Nominal tyre pressure	1,8 bar	Overall diameter	1360 mm
Tyre construction	Bias	Static loaded radius	635 mm
Recommended rim width	W13	Rolling circumference	4080 mm
Permitted rim width	W11, W12(L), DW13(L)	Load capacity at 10 km/h	3055 kg
Tread depth	36 mm	Load capacity at 30 km/h	2035 kg
EAN Tube	8714692285714	Load capacity at 40 km/h	1900 kg

16.9 - 28 10 PR / 139 A8 TT FAKTOR-S

EAN	8714692322273	Section width	430 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1435 mm
Tyre construction	Bias	Static loaded radius	670 mm
Recommended rim width	DW15L	Rolling circumference	4305 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3900 kg
Tread depth	37 mm	Load capacity at 30 km/h	2600 kg
EAN Tube	8714692331374	Load capacity at 40 km/h	2430 kg

TRACTOR TYRES

DRIVE BIAS —

16.9 - 30 8 PR / 137 A8 TT FAKTOR-S

EAN	8714692292002	Section width	430 mm
Nominal tyre pressure	1,7 bar	Overall diameter	1485 mm
Tyre construction	Bias	Static loaded radius	690 mm
Recommended rim width	DW15L	Rolling circumference	4450 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3690 kg
Tread depth	39 mm	Load capacity at 30 km/h	2460 kg
EAN Tube	8714692239816	Load capacity at 40 km/h	2300 kg

18.4 - 30 12 PR / 149 A8 TT FAKTOR-S

EAN	8714692292026	Section width	465 mm
Nominal tyre pressure	2,3 bar	Overall diameter	1545 mm
Tyre construction	Bias	Static loaded radius	720 mm
Recommended rim width	DW16L	Rolling circumference	4630 mm
Permitted rim width	W/DW15L, W16L	Load capacity at 10 km/h	5220 kg
Tread depth	41 mm	Load capacity at 30 km/h	3480 kg
EAN Tube	8714692320583	Load capacity at 40 km/h	3250 kg

12.4 - 32 8 PR / 125 A8 TT FAKTOR-S

EAN	8714692292033	Section width	315 mm
Nominal tyre pressure	2,2 bar	Overall diameter	1360 mm
Tyre construction	Bias	Static loaded radius	635 mm
Recommended rim width	W11	Rolling circumference	4080 mm
Permitted rim width	W9, W/DW10	Load capacity at 10 km/h	2650 kg
Tread depth	33 mm	Load capacity at 30 km/h	1765 kg
EAN Tube	8714692239823	Load capacity at 40 km/h	1650 kg

16.9 - 34 8 PR / 139 A8 TT FAKTOR-S

EAN	8714692292040	Section width	430 mm
Nominal tyre pressure	1,7 bar	Overall diameter	1580 mm
Tyre construction	Bias	Static loaded radius	735 mm
Recommended rim width	DW15L	Rolling circumference	4745 mm
Permitted rim width	W/DW14L, W15L	Load capacity at 10 km/h	3900 kg
Tread depth	39 mm	Load capacity at 30 km/h	2600 kg
EAN Tube	8714692239830	Load capacity at 40 km/h	2430 kg

18.4 - 34 8 PR / 142 A8 TT FAKTOR-S

EAN	8714692292057	Section width	465 mm
Nominal tyre pressure	1,4 bar	Overall diameter	1645 mm
Tyre construction	Bias	Static loaded radius	765 mm
Recommended rim width	DW16L	Rolling circumference	4940 mm
Permitted rim width	W/DW15L, W16L	Load capacity at 10 km/h	4255 kg
Tread depth	41 mm	Load capacity at 30 km/h	2835 kg
EAN Tube	8714692239847	Load capacity at 40 km/h	2650 kg

TRACTOR TYRES — DRIVE BIAS



TRACTOR TYRES

FRONT



LUG RING

FRONT TYRE FOR
LAND AND ROAD

FEATURES

- Robust shoulder bars
- Wide tread
- Good rolling capacity

BENEFITS

- Protection against punctures
- Large tread surface
- Also suitable for planting & sowing machines

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	Pag.
16	5.50 - 16	TT	6	86 A8	3,75	4.00E	160	720	340	95
	6.00 - 16	TT	6	88 A8	3,40	4.50E	175	750	355	95
	6.50 - 16	TT	6	91 A8	3,20	4.50E	185	780	375	95
	7.50 - 16	TT	6	98 A8	2,80	5.50F	210	825	390	95
18	7.50 - 18	TT	8	106 A8	3,75	5.50F	215	880	415	95
19	6.00 - 19	TT	6	93 A8	3,40	4.50E	170	830	390	96

For the explanation of the symbols and abbreviations, see the inside of the last page.

LUG RING

5.50 - 16 6 PR / 86 A8 TT LUG RING

EAN	8714692052095	Section width	160 mm
Nominal tyre pressure	3,8 bar	Overall diameter	720 mm
Tyre construction	Bias	Static loaded radius	340 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	590 kg
Permitted rim width	3.50D, 4.50E	Load capacity at 40 km/h	530 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.00 - 16 6 PR / 88 A8 TT LUG RING

EAN	8714692052118	Section width	175 mm
Nominal tyre pressure	3,4 bar	Overall diameter	750 mm
Tyre construction	Bias	Static loaded radius	355 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	620 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	560 kg
EAN Tube	8714692239137	Tread depth	15 mm

6.50 - 16 6 PR / 91 A8 TT LUG RING

EAN	8714692052132	Section width	185 mm
Nominal tyre pressure	3,2 bar	Overall diameter	780 mm
Tyre construction	Bias	Static loaded radius	375 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	680 kg
Permitted rim width	4.00E, 5.00F, 5.50F	Load capacity at 40 km/h	615 kg
EAN Tube	8714692239144	Tread depth	17 mm

7.50 - 16 6 PR / 98 A8 TT LUG RING

EAN	8714692052156	Section width	210 mm
Nominal tyre pressure	2,8 bar	Overall diameter	825 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	830 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	750 kg
EAN Tube	8714692239151	Tread depth	20 mm

7.50 - 18 8 PR / 106 A8 TT LUG RING

EAN	8714692052194	Section width	215 mm
Nominal tyre pressure	3,8 bar	Overall diameter	880 mm
Tyre construction	Bias	Static loaded radius	415 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1055 kg
Permitted rim width		Load capacity at 40 km/h	950 kg
EAN Tube	8714692239199	Tread depth	20 mm

TRACTOR TYRES

FRONT

6.00 - 19 6 PR / 93 A8 TT LUG RING			
EAN	8714692052217	Section width	170 mm
Nominal tyre pressure	3,4 bar	Overall diameter	830 mm
Tyre construction	Bias	Static loaded radius	390 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	720 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	650 kg
EAN Tube	8714692239700	Tread depth	15 mm



FAKTOR-F

THE TRACTOR FRONT TYRE
FOR THE COST CONSCIOUS FARMER

FEATURES

Wide longitudinal grooves

Strong nylon carcass

A8-rated

BENEFITS

Good self-cleaning

Good resistance to peak loads, e.g. using front loader

Suitable for driving speeds up to 40 km/h

Ø	Tyre size	TT/TL	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	Pag.
15	5.00 - 15	TT	6	82 A8	3,7	4.00 E	140	655	310	98
15.3	11.5/80 - 15.3	TT	8	119 A8	2,7	9.00	300	875	400	98
16	5.50 - 16	TT	6	86 A8	3,7	4.00 E	155	715	335	98
	6.00 - 16	TT	8	94 A8	4,5	4.50 E	170	735	345	98
	6.50 - 16	TT	8	98 A8	4,2	4.50 E	180	765	365	98
	7.50 - 16	TT	8	103 A8	3,7	5.50 F	205	815	385	99
	9.00 - 16	TT	10	116 A8	4,0	W8	265	885	420	99
	10.00 - 16	TT	8	115 A8	2,8	W8	280	910	425	99
	11.00 - 16	TT	10	122 A8	3,1	W10L	330	975	455	99
18	7.50 - 18	TT	8	106 A8	3,7	5.50 F	205	860	400	99
19	4.00 - 19	TT	4	72 A8	3,4	3.00 D	110	715	340	100
20	7.50 - 20	TT	8	109 A8	3,4	5.50 F	205	920	435	100

For the explanation of the symbols and abbreviations, see the inside of the last page.

TRACTOR TYRES

FRONT

5.00 - 15 6 PR / 82 A8 TT FAKTOR-F

EAN	8714692335075	Section width	140 mm
Nominal tyre pressure	3,7 bar	Overall diameter	655 mm
Tyre construction	Bias	Static loaded radius	305 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	525 kg
Permitted rim width	3.00D, 4J, 4.5J	Load capacity at 40 km/h	475 kg
		Tread depth	11 mm

11.5/80 - 15.3 8 PR 119 A8 TT FAKTOR-F

EAN	8714692805776	Section width	300 mm
Nominal tyre pressure	2,7 bar	Overall diameter	860 mm
Tyre construction	Bias	Static loaded radius	425 mm
Recommended rim width	9.00	Load capacity at 30 km/h	1510 kg
		Load capacity at 40 km/h	1360 kg
EAN Tube	8714692239014	Tread depth	18 mm

5.50 - 16 6 PR / 86 A8 TT FAKTOR-F

EAN	8714692327278	Section width	155 mm
Nominal tyre pressure	3,7 bar	Overall diameter	715 mm
Tyre construction	Bias	Static loaded radius	335 mm
Recommended rim width	4.00E	Load capacity at 30 km/h	585 kg
Permitted rim width	3.50D, 4.50E	Load capacity at 40 km/h	530 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.00 - 16 8 PR / 94 A8 TT FAKTOR-F

EAN	8714692327315	Section width	170 mm
Nominal tyre pressure	4,5 bar	Overall diameter	735 mm
Tyre construction	Bias	Static loaded radius	345 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	740 kg
Permitted rim width	4.00E, 5.00F	Load capacity at 40 km/h	670 kg
EAN Tube	8714692239137	Tread depth	13 mm

6.50 - 16 8 PR / 98 A8 TT FAKTOR-F

EAN	8714692335082	Section width	180 mm
Nominal tyre pressure	4,2 bar	Overall diameter	765 mm
Tyre construction	Bias	Static loaded radius	355 mm
Recommended rim width	4.50E	Load capacity at 30 km/h	830 kg
Permitted rim width	4.00E, 5.00F, 5.50F	Load capacity at 40 km/h	750 kg
EAN Tube	8714692239144	Tread depth	16 mm

TRACTOR TYRES FRONT

7.50 - 16 8 PR / 103 A8 TT FAKTOR-F

EAN	8714692327353	Section width	205 mm
Nominal tyre pressure	3,7 bar	Overall diameter	810 mm
Tyre construction	Bias	Static loaded radius	380 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	970 kg
Permitted rim width	5.00F, 6.00F	Load capacity at 40 km/h	875 kg
EAN Tube	8714692239151	Tread depth	18 mm

9.00 - 16 10 PR 116 A8 TT FAKTOR-F

EAN	8714692335105	Section width	260 mm
Nominal tyre pressure	4,0 bar	Overall diameter	870 mm
Tyre construction	Bias	Static loaded radius	400 mm
Recommended rim width	W8	Load capacity at 30 km/h	1385 kg
Permitted rim width	6.00F, W8L	Load capacity at 40 km/h	1250 kg
EAN Tube	8714692239168	Tread depth	22 mm

10.00 - 16 8 PR / 115 A8 TT FAKTOR-F

EAN	8714692327377	Section width	280 mm
Nominal tyre pressure	2,8 bar	Overall diameter	905 mm
Tyre construction	Bias	Static loaded radius	425 mm
Recommended rim width	W8	Load capacity at 30 km/h	1345 kg
Permitted rim width	W8L	Load capacity at 40 km/h	1215 kg
EAN Tube	8714692239175	Tread depth	21 mm

11.00 - 16 10 PR / 122 A8 TT FAKTOR-F

EAN	8714692335099	Section width	330 mm
Nominal tyre pressure	3,1 bar	Overall diameter	975 mm
Tyre construction	Bias	Static loaded radius	455 mm
Recommended rim width	W10L	Load capacity at 30 km/h	1665 kg
Permitted rim width	W8, W8L	Load capacity at 40 km/h	1500 kg
EAN Tube	8714692239182	Tread depth	22 mm

7.50 - 18 8 PR / 106 A8 TT FAKTOR-F

EAN	8714692327414	Section width	205 mm
Nominal tyre pressure	3,7 bar	Overall diameter	860 mm
Tyre construction	Bias	Static loaded radius	400 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1050 kg
Permitted rim width		Load capacity at 40 km/h	950 kg
EAN Tube	8714692239199	Tread depth	18 mm



TRACTOR TYRES

FRONT

4.00 - 19 4 PR / 72 A8 TT FAKTOR-F

EAN	8714692327438	Section width	110 mm
Nominal tyre pressure	3,4 bar	Overall diameter	715 mm
Tyre construction	Bias	Static loaded radius	335 mm
Recommended rim width	3.00D	Load capacity at 30 km/h	390 kg
Permitted rim width		Load capacity at 40 km/h	355 kg
		Tread depth	10 mm

7.50 - 20 8 PR / 109 A8 TT FAKTOR-F

EAN	8714692327452	Section width	205 mm
Nominal tyre pressure	3,4 bar	Overall diameter	915 mm
Tyre construction	Bias	Static loaded radius	425 mm
Recommended rim width	5.50F	Load capacity at 30 km/h	1140 kg
Permitted rim width	5.00F	Load capacity at 40 km/h	1030 kg
EAN Tube	8714692239717	Tread depth	18 mm



HARVESTER TYRES

DRIVE WHEEL

Pag.

Traxion Harvest	102
Traxion Optimall	108
TraxionXXL	109

STEERING WHEEL

Traxion Harvest	110
Traxion Versa	116
TraxionXXL / Traxion 65	117



HARVESTER TYRES DRIVE WHEEL —



TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY
WITH MODERN HARVESTING EQUIPMENT

FEATURES

Unique curved cleats
Strong yet flexible carcass
CHO technology

BENEFITS

High traction, stability & comfort
High load capacity and durability
Maximum soil preservation



TRAXION HARVEST

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
32	680/85 R 32	179 A8/B	3,2	DW21B	670	1950	875	5805	104
	800/65 R 32	172 A8/B	2,4	DW27B	770	1830	835	5450	104
	800/65 R 32	178 A8/B	3,2	DW27B	760	1840	835	5500	105
	800/70 R 32	175 A8/B	2,4	DW27B	770	1925	870	5700	105
	800/70 R 32	181 A8/B	3,2	DW27B	780	1925	870	5700	106
	900/60 R 32	181 A8/B	3,2	DW27B	835	1885	850	5610	106
38	800/70 R 38 CHO	181 D	2,8	DW25B	755	2050	920	6080	107

For the explanation of the symbols and abbreviations, see the inside of the last page.



HARVESTER TYRES

DRIVE WHEEL —

680/85 R 32 179 A8/B TL TRAXION HARVEST

EAN		8714692344886				Section width				670 mm									
Nominal tyre pressure		3,2 bar				Overall diameter				1950 mm									
Tyre construction		Radial				Static loaded radius				875 mm									
Recommended rim width		DW21B				Rolling circumference				5805 mm									
Permitted rim width		DW20B, DW23B				SRI				925									
						Tread depth				44 mm									
						75% of the tyre volume				755 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)																	
Speed (km/h)	10C	5990	7125	8280	9575	10325	11050	11665	12510	13175									
	10L	5285	6290	7305	8450	9110	9750	10295	11035	11625									
	10H	4190	4970	5830	6485	6955	7565	8295											
	25	4345	5160	6050	6725	7215	7850	8605											
	30	4190	4970	5830	6485	6955	7565	8295											
	40		4645	5450	6060	6500	7070	7750											
	50		4645	5450	6060	6500	7070	7750											

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/65 R 32 172 A8/B TL TRAXION HARVEST

EAN		8714692309656					Section width				770 mm		
Nominal tyre pressure		2,4 bar					Overall diameter				1830 mm		
Tyre construction		Radial					Static loaded radius				835 mm		
Recommended rim width		DW27B					Rolling circumference				5450 mm		
Permitted rim width		DW25B					SRI				875		
							Tread depth				56 mm		
							75% of the tyre volume				747 l		
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5145	5895	6570	7000	7550	8065	8600	9135	9530	9970	10410	10710
	10L	4540	5200	5800	6270	6890	7370	7775	8255	8405	8795	9185	9450
	10H	3530	4120	4530	4995	5395	5830	5950	6245	6505	6740		
	25	3665	4275	4700	5185	5595	6050	6170	6475	6750	6995		
	30	3530	4120	4530	4995	5395	5830	5950	6245	6505	6740		
	40			4235	4670	5040	5450	5560	5835	6080	6300		
	50			4235	4670	5040	5450	5560	5835	6080	6300		

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES — DRIVE WHEEL

800/65 R 32 178 A8/B TL TRAXION HARVEST

EAN		8714692336652				Section width		760 mm		
Nominal tyre pressure		3,2 bar				Overall diameter		1840 mm		
Tyre construction		Radial				Static loaded radius		835 mm		
Recommended rim width		DW27B				Rolling circumference		5500 mm		
Permitted rim width		DW25B				SRI		875		
						Tread depth		56 mm		
						75% of the tyre volume		737 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10C	5895	7000	8065	9135	9970	10710	11370	12185	12750
	10L	5200	6270	7370	8255	8795	9450	10035	10750	11250
	10H	4120	4995	5830	6245	6740	7375	8025		
	25	4275	5185	6050	6475	6995	7650	8325		
	30	4120	4995	5830	6245	6740	7375	8025		
	40		4670	5450	5835	6300	6890	7500		
	50		4670	5450	5835	6300	6890	7500		

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/70 R 32 175 A8/B TL TRAXION HARVEST

EAN		8714692309670					Section width			770 mm			
Nominal tyre pressure		2,4 bar					Overall diameter			1925 mm			
Tyre construction		Radial					Static loaded radius			870 mm			
Recommended rim width		DW27B					Rolling circumference			5700 mm			
Permitted rim width		DW30B					SRI			925			
							Tread depth			56 mm			
							75% of the tyre volume			844 l			
		Tyre pressure (bar)											
		0,60	0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80
		Load capacity per tyre(kg)											
Speed (km/h)	10C	5660	6480	7305	7710	8330	8960	9685	10360	10790	11170	11620	11730
	10L	4990	5720	6445	6805	7350	7905	8545	9140	9520	9855	10255	10350
	10H	3885	4530	4915	5380	5895	6420	6725	7015	7265	7385		
	25	4030	4700	5100	5580	6115	6660	6975	7275	7535	7660		
	30	3885	4530	4915	5380	5895	6420	6725	7015	7265	7385		
	40			4595	5025	5510	6000	6285	6555	6790	6900		
	50			4595	5025	5510	6000	6285	6555	6790	6900		

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES DRIVE WHEEL —

800/70 R 32 181 A8/B TL TRAXION HARVEST

EAN		8714692309694				Section width		780 mm		
Nominal tyre pressure		3,2 bar				Overall diameter		1925 mm		
Tyre construction		Radial				Static loaded radius		870 mm		
Recommended rim width		DW27B				Rolling circumference		5700 mm		
Permitted rim width		DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		856 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10C	6480	7710	8960	10360	11170	11730	12620	13530	14025
	10L	5720	6805	7905	9140	9855	10350	11135	11940	12375
	10H	4530	5380	6420	7015	7385	8185	8830		
	25	4700	5580	6660	7275	7660	8490	9160		
	30	4530	5380	6420	7015	7385	8185	8830		
	40			6000	6555	6900	7650	8250		
	50			6000	6555	6900	7650	8250		

For the explanation of the symbols and abbreviations, see the inside of the last page.

900/60 R 32 181 A8/B TL TRAXION HARVEST

EAN		8714692309731				Section width		835 mm		
Nominal tyre pressure		2,4 bar				Overall diameter		1885 mm		
Tyre construction		Radial				Static loaded radius		850 mm		
Recommended rim width		DW27B				Rolling circumference		5610 mm		
Permitted rim width		DW28B, DW30B				SRI		925		
						Tread depth		56 mm		
						75% of the tyre volume		870 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10C	6600	7845	9040	10235	11170	12070	12740	13650	14025
	10L	5825	6920	7975	9030	9855	10650	11240	12045	12375
	10H	4615	5465	6205	6995	7595	8260	8830		
	25	4790	5670	6440	7255	7880	8570	9160		
	30	4615	5465	6205	6995	7595	8260	8830		
	40		5110	5800	6535	7100	7720	8250		
	50		5110	5800	6535	7100	7720	8250		

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES — DRIVE WHEEL

800/70 R 38 CHO 181 D TL TRAXION HARVEST

EAN		8714692344916				Section width				755 mm			
Nominal tyre pressure		2,8 bar				Overall diameter				2050 mm			
Tyre construction		Radial				Static loaded radius				920 mm			
Recommended rim width		DW25B				Rolling circumference				6080 mm			
Permitted rim width		DW27B				SRI				975			
						Tread depth				57 mm			
						75% of the tyre volume				887 l			
		Tyre pressure (bar)											
		0,80	1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	
		Load capacity per tyre(kg)											
Speed (km/h)	10C	8180	8870	9705	10635	11700	12135	12655	13105	13500	14550	14850	
	15C	7495	8130	8900	9750	10725	11120	11605	12015	12375	13340	13615	
	25	5385	5840	6390	7000	7705	7990	8335	8630	8890	9580	9775	
	30	5225	5665	6200	6795	7475	7750	8085	8375	8625	9295	9490	
	40	4975	5395	5905	6470	7120	7380	7700	7975	8215	8855	9035	
	50	4770	5175	5660	6205	6825	7080	7385	7645	7875	8490	8665	
	65		4925	5390	5910	6500	6740	7030	7280	7500	8085	8250	
	70		4485	4905	5375	5915	6135	6400	6625	6825	7355	7510	

For the explanation of the symbols and abbreviations, see the inside of the last page.



HARVESTER TYRES DRIVE WHEEL —



TRAXION OPTIMALL

THE NEXT GENERATION VF TYRE

FEATURES

Innovative carcass construction enabling up to 25% lower inflation pressure in the field

Traxion concept with unique tread compound and high rubber content for 30% better wear resistance

10% higher radial stiffness**

BENEFITS

7%* higher productivity and 7%* lower fuel consumption
15%** larger footprint for less soil compaction and higher yield

30% longer life***

Maximum stability at heavy road transport

* According to tests conducted by DLG, compared to premium European IF competitor tyre.

** According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.

*** According to Vredestein R&D compared to premium European IF and VF competitor tyres.

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
38	VF 650/85 R 38	182 D	2,0	DW23B	680	2065	885	6070	22
	VF 710/70 R 38 NRO	181 D	2,0	DW25B	735	1945	840	5720	24
	VF 800/70 R 38	187 D	2,0	DW27B	805	2060	900	6100	24
42	VF 650/85 R 42	183 D	2,0	DW23B	665	2165	935	6380	25
	VF 710/70 R 42	182 D	2,0	DW25B	730	2060	910	6110	26
	VF 710/75 R 42	184 D	2,0	DW25B	730	2160	965	6390	27
	VF 800/70 R 42	189 D	2,0	DW27B	800	2165	930	6380	27
	VF 900/60 R 42 NRO	189 D	2,0	DW30B	875	2145	920	6315	28
44	VF 750/70 R 44	186 D	2,0	DW25B	760	2185	940	6500	29

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES — DRIVE WHEEL



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume

BENEFITS

Extended lifespan

Maximized traction and excellent comfort

High load capacity



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
38	710/70 R 38	171 D	2,4	DW23B	730	1930	870	5760	37
	710/75 R 38	174 D	2,4	DW23B	715	2000	910	5950	38
	800/70 R 38	178 D	2,4	DW25B	825	2065	940	6160	38
	900/60 R 38	178 D	2,4	DW27B	870	2040	925	6100	39
42	710/70 R 42	173 D	2,4	DW23B	730	2060	940	6140	39
	710/75 R 42	175 D	2,4	DW23B	735	2150	980	6395	40

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES STEERING WHEEL -



TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY
WITH MODERN HARVESTING EQUIPMENT

FEATURES

Unique curved cleats

Strong yet flexible carcass

IMP technology

BENEFITS

High traction, stability & comfort

High load capacity and durability

Maximum soil preservation



TRAXION HARVEST

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
24	460/70 R 24 IMP	163 A8	3,2	W15L	455	1235	555	3745	111
	500/70 R 24 IMP	164 A8	2,8	W15L	480	1305	580	3925	112
	500/85 R 24 IMP	171 A8	2,8	W15L	505	1450	645	4360	112
28	500/80 R 28 IMP	176 A8	3,2	W15L	490	1490	665	4520	113
	600/65 R 28 IMP	168 A8	2,0	DW18L	580	1470	650	4300	113
30	500/85 R 30 IMP	176 A8	2,8	W16L	505	1600	715	4750	114
	620/70 R 30 IMP	178 A8	2,8	DW20B	590	1600	715	4760	114

For the explanation of the symbols and abbreviations, see the inside of the last page.



460/70 R 24 IMP 163 A8 / 151 A8 TL TRAXION HARVEST									
EAN			8714692335426			Section width			455 mm
Nominal tyre pressure			3,2 bar			Overall diameter			1235 mm
Tyre construction			Radial			Static loaded radius			555 mm
Recommended rim width			W15L			Rolling circumference			3745 mm
Permitted rim width			W14L, W16L			SRI			600
Very important: When these are fitted on a steered axle, see***						Tread depth			34 mm
						75% of the tyre volume			169 l
		Tyre pressure (bar)							
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	
Load capacity per tyre(kg)									
Speed (km/h)	10 ➡	2805	3610	4410	5110	5600	6125	6825	
	10 ⦿	1965	2525	3050	3605	3920	4305	4830	
	25 ➡	2385	3070	3750	4345	4760	5205	5800	
	25 ⦿	1670	2145	2595	3065	3330	3660	4105	
	30 ➡	2245	2885	3530	4090	4480	4900	5460	
	30 ⦿	1570	2020	2440	2885	3135	3445	3865	
	40 ➡	2005	2580	3150	3650	4000	4375	4875	
	40 ⦿	1405	1805	2180	2575	2800	3075	3450	
50 ➡	1805	2320	2835	3285	3600	3940	4390		

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES

STEERING WHEEL -

500/70 R 24 IMP 164 A8 / 155 A8 TL TRAXION HARVEST

EAN		8714692335433		Section width		480 mm	
Nominal tyre pressure		2,8 bar		Overall diameter		1305 mm	
Tyre construction		Radial		Static loaded radius		580 mm	
Recommended rim width		W15L		Rolling circumference		3925 mm	
Permitted rim width		W16L		SRI		625	
Very important: When these are fitted on a steered axle, see***				Tread depth		37 mm	
				75% of the tyre volume		211 l	
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre(kg)					
Speed (km/h)	10 	3200	4115	4970	5775	6475	7000
	10 	2480	3190	3920	4550	4970	5425
	25 	2720	3495	4225	4910	5505	5950
	25 	2110	2710	3330	3870	4225	4610
	30 	2560	3290	3975	4620	5180	5600
	30 	1985	2550	3135	3640	3975	4340
	40 	2285	2940	3550	4125	4625	5000
	40 	1770	2275	2800	3250	3550	3875
	50	2055	2645	3195	3715	4165	4500

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/85 R 24 IMP 171 A8 / 158 A8 TL TRAXION HARVEST

EAN		8714692335440		Section width		505 mm							
Nominal tyre pressure		2,8 bar		Overall diameter		1450 mm							
Tyre construction		Radial		Static loaded radius		645 mm							
Recommended rim width		W15L		Rolling circumference		4360 mm							
Permitted rim width		W16L		SRI		700							
Very important: When these are fitted on a steered axle, see***				Tread depth		37 mm							
				75% of the tyre volume		302 l							
		Tyre pressure (bar)											
		0,80		1,20		1,60		2,00		2,40		2,80	
		Load capacity per tyre(kg)											
Speed (km/h)	10 	3830	4925	5950	6650	7630	8610						
	10 	2680	3445	4200	4690	5250	5950						
	25 	3255	4185	5060	5655	6485	7320						
	25 	2280	2930	3570	3985	4465	5060						
	30 	3065	3940	4760	5320	6105	6890						
	30 	2145	2755	3360	3750	4200	4760						
	40 	2735	3515	4250	4750	5450	6150						
	40 	1915	2460	3000	3350	3750	4250						
50	2460	3165	3825	4275	4905	5535							

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES -STEERING WHEEL

500/80 R 28 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

EAN	8714692335457	Section width	490 mm
Nominal tyre pressure	3,2 bar	Overall diameter	1490 mm
Tyre construction	Radial	Static loaded radius	665 mm
Recommended rim width	W15L	Rolling circumference	4520 mm
Permitted rim width	W16L	SRI	725
Very important: When these are fitted on a steered axle, see***		Tread depth	37 mm
		75% of the tyre volume	283 l

		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10 →	3855	4960	6125	7000	8120	9100	9940
	10 ⦿	2740	3520	4305	4970	5775	6475	7000
	25 →	3280	4215	5205	5950	6900	7735	8450
	25 ⦿	2330	2995	3660	4225	4910	5505	5950
	30 →	3085	3965	4900	5600	6495	7280	7950
	30 ⦿	2190	2815	3445	3975	4620	5180	5600
	40 →	2755	3540	4375	5000	5800	6500	7100
	40 ⦿	1955	2515	3075	3550	4125	4625	5000
	50 →	2480	3190	3940	4500	5220	5850	6390

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/65 R 28 IMP 168 A8 / 156 A8 TL TRAXION HARVEST

EAN	8714692335471	Section width	580 mm
Nominal tyre pressure	2,0 bar	Overall diameter	1470 mm
Tyre construction	Radial	Static loaded radius	650 mm
Recommended rim width	DW18L	Rolling circumference	4300 mm
Permitted rim width	DW16L,W18L	SRI	700
Very important: When these are fitted on a steered axle, see***		Tread depth	52 mm
		75% of the tyre volume	315 l

		Tyre pressure (bar)			
		0,80	1,20	1,60	2,00
		Load capacity per tyre(kg)			
Speed (km/h)	10 →	4255	5475	6650	7840
	10 ⦿	3085	3970	4830	5600
	25 →	3620	4650	5655	6665
	25 ⦿	2625	3375	4105	4760
	30 →	3405	4380	5320	6270
	30 ⦿	2470	3175	3865	4480
	40 →	3040	3910	4750	5600
	40 ⦿	2205	2835	3450	4000
	50 →	2735	3520	4275	5040

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES

STEERING WHEEL -

500/85 R 30 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

EAN	8714692335464	Section width	505 mm				
Nominal tyre pressure	2,8 bar	Overall diameter	1600 mm				
Tyre construction	Radial	Static loaded radius	715 mm				
Recommended rim width	W16L	Rolling circumference	4750 mm				
Permitted rim width	W15L	SRI	775				
Very important: When these are fitted on a steered axle, see***		Tread depth	37 mm				
		75% of the tyre volume	344 l				
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre(kg)					
Speed (km/h)	10 	4195	5395	6650	7630	8820	9940
	10 	2940	3775	4550	5425	6125	7000
	25 	3565	4585	5655	6485	7495	8450
	25 	2495	3210	3870	4610	5205	5950
	30 	3355	4315	5320	6105	7055	7950
	30 	2350	3020	3640	4340	4900	5600
	40 	3000	3855	4750	5450	6300	7100
	40 	2100	2700	3250	3875	4375	5000
	50	2700	3470	4275	4905	5670	6390

For the explanation of the symbols and abbreviations, see the inside of the last page.

620/70 R 30 IMP 178 A8 / 166 A8 TL TRAXION HARVEST

EAN	8714692335488	Section width	590 mm			
Nominal tyre pressure	2,4 bar	Overall diameter	1600 mm			
Tyre construction	Radial	Static loaded radius	715 mm			
Recommended rim width	DW20L	Rolling circumference	4760 mm			
Permitted rim width	DW18L	SRI	775			
Very important: When these are fitted on a steered axle, see***		Tread depth	52 mm			
		75% of the tyre volume	392 l			
		Tyre pressure (bar)				
		0,80	1,20	1,60	2,00	2,40
		Load capacity per tyre(kg)				
Speed (km/h)	10 	4935	6345	7840	9100	10500
	10 	3505	4505	5425	6300	7420
	25 	4195	5395	6665	7735	8925
	25 	2980	3830	4610	5355	6305
	30 	3950	5080	6270	7280	8400
	30 	2805	3605	4340	5040	5935
	40 	3525	4535	5600	6500	7500
	40 	2505	3220	3875	4500	5300
	50	3175	4080	5040	5850	6750

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES -STEERING WHEEL



HARVESTER TYRES STEERING WHEEL -



TRAXION^{VERSA}

UNBEATABLE ON
SOFT SURFACES

FEATURES

- Large cleat surface in comfort zone
- Extended curved cleats in traction zone
- Reinforced sidewall & stabiliser ring

BENEFITS

- Flat and large contact surface
- Maximum traction
- Maximum damage protection

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	455	3000	124
20	400/70 R 20 IND	149 A8/B	4,0	13	405	1075	475	3250	124
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	535	3510	125
	400/80 R 24 IND	162 A8/B	5,0	DW13	405	1240	570	3740	125
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1255	570	3800	126
	500/70 R 24 IND	164 A8/B	4,0	DW16L	515	1320	595	4020	126
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	127
28	440/80 R 28 IND	156 A8/B	4,0	DW14L	450	1415	640	4270	127

For the explanation of the symbols and abbreviations, see the inside of the last page.

HARVESTER TYRES -STEERING WHEEL



TRAXION^{XXL}

OFFERING HIGHEST EFFICIENCY AND
LONGEST LIFE FOR HIGH HP TRACTORS

FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume

BENEFITS

Extended lifespan

Maximized traction and excellent comfort

High load capacity



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
28	600/65 R 28	154 D	2,4	DW18L	595	1480	670	4405	33
	600/70 R 28	157 D	2,4	DW20B	610	1540	700	4590	33
30	540/65 R 30 ¹	150 D	2,4	DW16L	540	1460	670	4400	49
	600/70 R 30	158 D	2,4	DW20B	630	1590	725	4750	34
	710/60 R 30	162 D	2,4	DW23B	705	1610	730	4800	34

For the explanation of the symbols and abbreviations, see the inside of the last page.

1 = Traxion 65





AGRI INDUSTRIAL TYRES

SOFT SURFACE

PAG.

Traxion Versa Green

120

Traxion Versa

122

HARD SURFACE

Endurion

128



AGRI INDUSTRIAL TYRES FOR SOFT SURFACES —



TRAXION VERSA GREEN

THE PREMIUM SOLUTION
FOR ALPINE APPLICATIONS

FEATURES

Traxion concept with unique tread compound and high rubber content in the centre

Steel belt combined with stabilizer ring

Curved Tread Contour with rounded lug shoulders

BENEFITS

Excellent driving comfort & 30% longer tyre life
Maximum traction

Excellent side grip for stable driving behaviour on slopes

Grassland preservation



TRAXION VERSA GREEN

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
17	440/50 R 17 IMP	135 D	3,6	14	435	875	405	2660	121

For the explanation of the symbols and abbreviations, see the inside of the last page.

440/50 R 17 IMP 135 D TL TRAXION VERSA GREEN										
EAN				8714692892943		Section width				435 mm
Nominal tyre pressure				3,6 bar		Overall diameter				875 mm
Tyre construction				Radial		Static loaded radius				405 mm
Recommended rim width				14		Rolling circumference				2660 mm
Permitted rim width				13.00		SRI				410
Alternative tyre size				425/55 R 17		Tread depth (including tie bar)				27 mm
						Tie bar height				3 mm
						75% of the tyre volume				104 l
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	
		Load capacity per tyre(kg)								
Speed (km/h)	10	1370	1765	2155	2500	2865	3225	3510	3925	
	25	1205	1545	1890	2195	2515	2830	3080	3445	
	30	1150	1480	1805	2095	2405	2705	2945	3290	
	40	1035	1330	1630	1890	2165	2435	2650	2965	
	50	920	1185	1450	1680	1925	2170	2360	2640	
	65		980	1195	1390	1590	1790	1950	2180	
	70		890	1090	1265	1450	1630	1775	1985	

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES FOR SOFT SURFACES —



TRAXION^{VERSA}

UNBEATABLE ON
SOFT SURFACES

FEATURES

- Large cleat surface in comfort zone
- Extended curved cleats in traction zone
- Reinforced sidewall & stabiliser ring

BENEFITS

- Flat and large contact surface
- Maximum traction
- Maximum damage protection



TRAXION VERSA

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	455	3000	124
20	400/70 R 20 IND	149 A8/B	4,0	13	405	1075	475	3250	124
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	535	3510	125
	400/80 R 24 IND	162 A8/B	5,0	DW13	405	1240	570	3740	125
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1255	570	3800	126
	500/70 R 24 IND	164 A8/B	4,0	DW16L	515	1320	595	4020	126
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	127
28	440/80 R 28 IND	156 A8/B	3,2	DW14L	450	1415	640	4270	127

For the explanation of the symbols and abbreviations, see the inside of the last page.



AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

340/80 R 18 IND 143 A8/B TL TRAXION VERSA

EAN		8714692335341			Section width		355 mm										
Nominal tyre pressure		4,0 bar			Overall diameter		1000 mm										
Tyre construction		Radial			Static loaded radius		455 mm										
Recommended rim width		11			Rolling circumference		3000 mm										
Permitted rim width		W10, W11, 11SDC, 12, 12SC			SRI		475										
Alternative tyre size		335/80 R 18			Tread depth (including tie bar)		32 mm										
		12.5 R 18			Tie bar height		3 mm										
					75% of the tyre volume		86 l										
		Tyre pressure (bar)															
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40	
		Load capacity per tyre(kg)															
Speed (km/h)	0	2430	2970	3505	4045	4585	5150	5665	6265								
	10Ci	1585	1935	2285	2640	2990	3360	3695	4090								
	25	1370	1615	1865	2115	2375	2610	2890									
	30	1340	1585	1830	2075	2330	2560	2835									
	40	1290	1525	1760	1995	2240	2465	2725									
	50	1290	1525	1760	1995	2240	2465	2725									

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/70 R 20 IND 149 A8/B TL TRAXION VERSA

EAN		8714692309922			Section width		405 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1075 mm		
Tyre construction		Radial			Static loaded radius		475 mm		
Recommended rim width		13			Rolling circumference		3250 mm		
Permitted rim width		12SDC, 13SDC, 14			SRI		525		
Alternative tyre size		405/70 R 20			Tread depth (including tie bar)		36 mm		
		16.0/70 R 20			Tie bar height		3 mm		
					75% of the tyre volume		115 l		
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	2915	3590	4260	4860	5530	6205	6840	7475
	10Ci	1900	2340	2780	3170	3610	4045	4460	4875
	25	1640	1955	2245	2640	2970	3150	3445	
	30	1610	1920	2205	2590	2910	3095	3380	
	40	1550	1845	2120	2490	2800	2975	3250	
	50	1550	1845	2120	2490	2800	2975	3250	

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES — FOR SOFT SURFACES

400/70 R 24 IND 152 A8/B TL TRAXION VERSA

EAN		8714692335358				Section width				405 mm
Nominal tyre pressure		4,0 bar				Overall diameter				1170 mm
Tyre construction		Radial				Static loaded radius				535 mm
Recommended rim width		13				Rolling circumference				3510 mm
Permitted rim width		12SDC, 13SDC, 14				SRI				575
Alternative tyre size		405/70 R 24				Tread depth (including tie bar)				35 mm
		16.0/70 R 24				Tie bar height				3 mm
						75% of the tyre volume				124 l
		Tyre pressure (bar)								
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	
		Load capacity per tyre(kg)								
Speed (km/h)	0	3150	3850	4550	5250	5950	6670	7350	8165	
	10Ci	2055	2510	2965	3425	3880	4350	4795	5325	
	25	1775	2095	2420	2740	3075	3385	3765		
	30	1740	2055	2375	2690	3015	3325	3690		
	40	1675	1980	2285	2585	2900	3195	3550		
	50	1675	1980	2285	2585	2900	3195	3550		

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/80 R 24 IND 162 A8/B TL TRAXION VERSA

EAN		8714692335365				Section width		405 mm		
Nominal tyre pressure		5,0 bar				Overall diameter		1240 mm		
Tyre construction		Radial				Static loaded radius		570 mm		
Recommended rim width		DW13				Rolling circumference		3740 mm		
Permitted rim width		13				SRI		600		
Alternative tyre size		15.5/80 R 24				Tread depth (including tie bar)		39 mm		
						Tie bar height		3 mm		
						75% of the tyre volume		151 l		
		Tyre pressure (bar)								
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	5,00
		Load capacity per tyre(kg)								
Speed (km/h)	0	3545	4335	5120	5910	6695	7475	8275	9200	10240
	10Ci	2310	2825	3340	3855	4365	4875	5395	6000	6680
	25	1995	2360	2725	3085	3445	3815	4240	4540	5035
	30	1960	2315	2670	3030	3380	3740	4160	4455	4940
	40	1885	2225	2570	2910	3250	3595	4000	4280	4750
	50	1885	2225	2570	2910	3250	3595	4000	4280	4750

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

460/70 R 24 IND 159 A8/B TL TRAXION VERSA

EAN	8714692309946	Section width	480 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1255 mm						
Tyre construction	Radial	Static loaded radius	570 mm						
Recommended rim width	DW15L	Rolling circumference	3800 mm						
Permitted rim width	DW14L, DW16L	SRI	600						
Alternative tyre size	17.5 LR 24	Tread depth (including tie bar)	38 mm						
EAN Tube	8714692332685	Tie bar height	3 mm						
		75% of the tyre volume	191 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	3915	4785	5655	6520	7390	8165	9130	10065
	10Ci	2550	3120	3685	4255	4820	5325	5955	6565
	25	2205	2605	3005	3405	3765	4210	4640	
	30	2165	2555	2950	3340	3690	4130	4550	
	40	2080	2460	2835	3215	3550	3970	4375	
	50	2080	2460	2835	3215	3550	3970	4375	

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/70 R 24 IND 164 A8/B TL TRAXION VERSA

EAN	8714692309960	Section width	515 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1320 mm						
Tyre construction	Radial	Static loaded radius	595 mm						
Recommended rim width	DW16L	Rolling circumference	4020 mm						
Permitted rim width	DW15L, DW18L	SRI	625						
Alternative tyre size	19.5 LR 24	Tread depth (including tie bar)	39 mm						
EAN Tube	8714692332692	Tie bar height	3 mm						
		75% of the tyre volume	234 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	4460	5450	6445	7435	8425	9490	10410	11500
	10Ci	2910	3555	4200	4850	5495	6190	6790	7500
	25	2515	2970	3425	3885	4375	4795	5300	
	30	2465	2915	3360	3810	4290	4705	5200	
	40	2370	2800	3230	3665	4125	4525	5000	
	50	2370	2800	3230	3665	4125	4525	5000	

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES — FOR SOFT SURFACES

480/80 R 26 IND 160 A8/B TL TRAXION VERSA

EAN		8714692309984		Section width		495 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1440 mm							
Tyre construction		Radial		Static loaded radius		645 mm							
Recommended rim width		DW15L		Rolling circumference		4320 mm							
Permitted rim width		DW16L		SRI		675							
Alternative tyre size		18.4 R 26		Tread depth (including tie bar)		39 mm							
				Tie bar height		3 mm							
				75% of the tyre volume		273 l							
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre(kg)											
Speed (km/h)	0	4885	5970	7055	8145	9230	10350						
	10Ci	3185	3895	4605	5310	6020	6750						
	25	2750	3255	3755	4255	4770							
	30	2700	3190	3680	4175	4680							
	40	2595	3070	3540	4015	4500							
	50	2595	3070	3540	4015	4500							

For the explanation of the symbols and abbreviations, see the inside of the last page.

440/80 R 28 IND 156 A8/B TL TRAXION VERSA

EAN		8714692336416		Section width		450 mm							
Nominal tyre pressure		3,2 bar		Overall diameter		1415 mm							
Tyre construction		Radial		Static loaded radius		640 mm							
Recommended rim width		DW14L		Rolling circumference		4270 mm							
Permitted rim width		DW15L		SRI		675							
Alternative tyre size		16.9 R 28		Tread depth (including tie bar)		39 mm							
				Tie bar height		3 mm							
				75% of the tyre volume		219 l							
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre(kg)											
Speed (km/h)	0	4405	5380	6360	7340	8315	9200						
	10Ci	2870	3510	4150	4785	5425	6000						
	25	2480	2930	3380	3835	4240							
	30	2435	2875	3320	3760	4160							
	40	2340	2765	3190	3615	4000							
	50	2340	2765	3190	3615	4000							

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES——



ENDURION

THE EFFICIENCY CHAMPION
ON HARD SURFACES

FEATURES

High rubber content in profile (44%)

Broad-based 45-degree cleats

Sophisticated compound and robust carcass design

BENEFITS

Exceptionally long service life

Optimal self-cleaning and traction

High durability, maximum return on investment



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
18	340/80 R 18 IND	143 A8/B	4,0	11	355	1000	460	3000	130
	400/70 R 18 IND	147 A8/B	4,0	13	410	1015	465	3050	130
20	340/80 R 20 IND	144 A8/B	4,0	11	355	1055	490	3180	131
	400/70 R 20 IND	149 A8/B	4,0	13	405	1070	490	3245	131
24	400/70 R 24 IND	152 A8/B	4,0	13	405	1170	540	3510	132
	400/80 R 24 IND	162 A8/B	5,0	DW13	410	1245	570	3720	132
	460/70 R 24 IND	159 A8/B	4,0	DW15L	480	1265	570	3820	133
	500/70 R 24 IND	164 A8/B	4,0	DW16L	520	1315	595	4000	133
26	480/80 R 26 IND	160 A8/B	3,2	DW15L	495	1440	645	4320	134
28	440/80 R 28 IND	156 A8/B	3,2	DW14L	455	1420	640	4290	134

For the explanation of the symbols and abbreviations, see the inside of the last page.



AGRI INDUSTRIAL TYRES FOR HARD SURFACES

340/80 R 18 IND 143 A8/B TL ENDURION

EAN	8714692335372	Section width	355 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1000 mm						
Tyre construction	Radial	Static loaded radius	460 mm						
Recommended rim width	11	Rolling circumference	3000 mm						
Permitted rim width	W10, W11, 11SDC, 12, 12SC	SRI	475						
Alternative tyre size	335/80 R 18	Tread depth (including tie bar)	26 mm						
	12.5 R 18	Tie bar height	3 mm						
		75% of the tyre volume	89 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	2430	2970	3505	4045	4585	5150	5665	6265
	10Ci	1585	1935	2285	2640	2990	3360	3695	4090
	25	1370	1615	1865	2115	2375	2610	2890	
	30	1340	1585	1830	2075	2330	2560	2835	
	40	1290	1525	1760	1995	2240	2465	2725	
	50	1290	1525	1760	1995	2240	2465	2725	

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/70 R 18 IND 147 A8/B TL ENDURION

EAN	8714692335389				Section width		410 mm										
Nominal tyre pressure	4,0 bar				Overall diameter		1015 mm										
Tyre construction	Radial				Static loaded radius		465 mm										
Recommended rim width	13				Rolling circumference		3050 mm										
Permitted rim width	12SDC, 13SDC, 14				SRI		475										
Alternative tyre size	405/70 R 18				Tread depth (including tie bar)		25 mm										
	16.0/70 R 18				Tie bar height		3 mm										
					75% of the tyre volume		109 l										
		Tyre pressure (bar)															
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40	
		Load capacity per tyre(kg)															
Speed (km/h)	0	2780	3395	4015	4630	5250	5920	6485	7070								
	10Ci	1810	2215	2620	3020	3425	3865	4230	4615								
	25	1565	1850	2135	2420	2730	2990	3260									
	30	1535	1815	2095	2375	2680	2930	3200									
	40	1475	1745	2015	2280	2575	2820	3075									
	50	1475	1745	2015	2280	2575	2820	3075									

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES — FOR HARD SURFACES

340/80 R 20 IND 144 A8/B TL ENDURION

EAN	8714692336584	Section width	355 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1055 mm						
Tyre construction	Radial	Static loaded radius	490 mm						
Recommended rim width	11	Rolling circumference	3180 mm						
Permitted rim width	W10, W11, 11SDC, 12, 12SC	SRI	500						
Alternative tyre size	335/80 R 20	Tread depth (including tie bar)	26 mm						
	12.5 R 20	Tie bar height	3 mm						
		75% of the tyre volume	96 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	2540	3105	3670	4235	4795	5430	5925	6440
	10Ci	1655	2025	2390	2760	3130	3540	3865	4200
	25	1430	1690	1950	2210	2500	2730	2970	
	30	1405	1660	1915	2170	2455	2680	2910	
	40	1350	1595	1840	2085	2360	2575	2800	
	50	1350	1595	1840	2085	2360	2575	2800	

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/70 R 20 IND 149 A8/B TL ENDURION

EAN		8714692335396			Section width			405 mm									
Nominal tyre pressure		4,0 bar			Overall diameter			1070 mm									
Tyre construction		Radial			Static loaded radius			490 mm									
Recommended rim width		13			Rolling circumference			3245 mm									
Permitted rim width		12SDC, 13SDC, 14			SRI			525									
Alternative tyre size		405/70 R 20			Tread depth (including tie bar)			25 mm									
		16.0/70 R 20			Tie bar height			3 mm									
					75% of the tyre volume			116 l									
		Tyre pressure (bar)															
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40	
		Load capacity per tyre(kg)															
Speed (km/h)	0	2905	3550	4195	4840	5485	6095	6780	7475								
	10Ci	1895	2315	2735	3160	3580	3975	4420	4875								
	25	1635	1935	2230	2530	2810	3125	3445									
	30	1605	1895	2190	2480	2755	3065	3380									
	40	1545	1825	2105	2385	2650	2945	3250									
	50	1545	1825	2105	2385	2650	2945	3250									

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES

400/70 R 24 IND 152 A8/B TL ENDURION

EAN		8714692335402			Section width		405 mm										
Nominal tyre pressure		4,0 bar			Overall diameter		1170 mm										
Tyre construction		Radial			Static loaded radius		540 mm										
Recommended rim width		13			Rolling circumference		3510 mm										
Permitted rim width		W10, W11, 12SDC, 13SDC, 14			SRI		500										
Alternative tyre size		405/70 R 24			Tread depth (including tie bar)		25 mm										
		16.0/70 R 24			Tie bar height		3 mm										
		16.0/70 R 24			75% of the tyre volume		130 l										
		Tyre pressure (bar)															
		1,60		2,00		2,40		2,80		3,20		3,60		4,00		4,40	
		Load capacity per tyre(kg)															
Speed (km/h)	0	3150	3850	4550	5250	5950	6670	7350	8165								
	10Ci	2055	2510	2965	3425	3880	4350	4795	5325								
	25	1775	2095	2420	2740	3075	3385	3765									
	30	1740	2055	2375	2690	3015	3325	3690									
	40	1675	1980	2285	2585	2900	3195	3550									
	50	1675	1980	2285	2585	2900	3195	3550									

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/80 R 24 IND 162 A8/B TL ENDURION

EAN	8714692335419	Section width	410 mm							
Nominal tyre pressure	5,0 bar	Overall diameter	1245 mm							
Tyre construction	Radial	Static loaded radius	570 mm							
Recommended rim width	DW13	Rolling circumference	3720 mm							
Permitted rim width	13	SRI	600							
Alternative tyre size	15.5/80 R 24	Tread depth (including tie bar)	30 mm							
		Tie bar height	3 mm							
		75% of the tyre volume	158 l							
Tyre pressure (bar)										
	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	5,00	
Load capacity per tyre(kg)										
Speed (km/h)	0	3545	4335	5120	5910	6695	7475	8275	9200	10240
	10Ci	2310	2825	3340	3855	4365	4875	5395	6000	6680
	25	1995	2360	2725	3085	3445	3815	4240	4540	5035
	30	1960	2315	2670	3030	3380	3740	4160	4455	4940
	40	1885	2225	2570	2910	3250	3595	4000	4280	4750
	50	1885	2225	2570	2910	3250	3595	4000	4280	4750

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES — FOR HARD SURFACES

460/70 R 24 IND 159 A8/B TL ENDURION

EAN	8714692310003	Section width	480 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1265 mm						
Tyre construction	Radial	Static loaded radius	570 mm						
Recommended rim width	DW15L	Rolling circumference	3820 mm						
Permitted rim width	DW14L, DW16L	SRI	600						
Alternative tyre size	17.5 LR 24	Tread depth (including tie bar)	30 mm						
EAN Tube	8714692332685	Tie bar height	3 mm						
		75% of the tyre volume	199 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	3915	4785	5655	6520	7390	8165	9130	10065
	10Ci	2550	3120	3685	4255	4820	5325	5955	6565
	25	2205	2605	3005	3405	3765	4210	4640	
	30	2165	2555	2950	3340	3690	4130	4550	
	40	2080	2460	2835	3215	3550	3970	4375	
	50	2080	2460	2835	3215	3550	3970	4375	

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/70 R 24 IND 164 A8/B TL ENDURION

EAN	8714692310027	Section width	520 mm						
Nominal tyre pressure	4,0 bar	Overall diameter	1315 mm						
Tyre construction	Radial	Static loaded radius	595 mm						
Recommended rim width	DW16L	Rolling circumference	4000 mm						
Permitted rim width	DW15L, DW18L	SRI	625						
Alternative tyre size	19.5 LR 24	Tread depth (including tie bar)	30 mm						
EAN Tube	8714692332692	Tie bar height	3 mm						
		75% of the tyre volume	246 l						
		Tyre pressure (bar)							
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40
		Load capacity per tyre(kg)							
Speed (km/h)	0	4460	5450	6445	7435	8425	9490	10410	11500
	10Ci	2910	3555	4200	4850	5495	6190	6790	7500
	25	2515	2970	3425	3885	4375	4795	5300	
	30	2465	2915	3360	3810	4290	4705	5200	
	40	2370	2800	3230	3665	4125	4525	5000	
	50	2370	2800	3230	3665	4125	4525	5000	

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES FOR HARD SURFACES

480/80 R 26 IND 160 A8/B TL ENDURION

EAN	8714692310041	Section width	495 mm										
Nominal tyre pressure	3,2 bar	Overall diameter	1440 mm										
Tyre construction	Radial	Static loaded radius	645 mm										
Recommended rim width	DW15L	Rolling circumference	4320 mm										
Permitted rim width	DW16L	SRI	675										
Alternative tyre size	18.4 R 26	Tread depth (including tie bar)	30 mm										
		Tie bar height	3 mm										
		75% of the tyre volume	283 l										
		Tyre pressure (bar)											
		1,60		2,00		2,40		2,80		3,20		3,60	
		Load capacity per tyre(kg)											
Speed (km/h)	0	4885	5970	7055	8145	9230	10350						
	10Ci	3185	3895	4605	5310	6020	6750						
	25	2750	3255	3755	4255	4770							
	30	2700	3190	3680	4175	4680							
	40	2595	3070	3540	4015	4500							
	50	2595	3070	3540	4015	4500							

For the explanation of the symbols and abbreviations, see the inside of the last page.

440/80 R 28 IND 156 A8/B TL ENDURION

EAN	8714692310065	Section width	455 mm				
Nominal tyre pressure	3,2 bar	Overall diameter	1420 mm				
Tyre construction	Radial	Static loaded radius	640 mm				
Recommended rim width	DW14L	Rolling circumference	4290 mm				
Permitted rim width	DW13L, DW15L	SRI	675				
Alternative tyre size	16.9 R 28	Tread depth (including tie bar)	30 mm				
		Tie bar height	3 mm				
		75% of the tyre volume	238 l				
		Tyre pressure (bar)					
		1,60	2,00	2,40	2,80	3,20	3,60
		Load capacity per tyre(kg)					
Speed (km/h)	0	4405	5380	6360	7340	8315	9200
	10Ci	2870	3510	4150	4785	5425	6000
	25	2480	2930	3380	3835	4240	
	30	2435	2875	3320	3760	4160	
	40	2340	2765	3190	3615	4000	
	50	2340	2765	3190	3615	4000	

For the explanation of the symbols and abbreviations, see the inside of the last page.

AGRI INDUSTRIAL TYRES — FOR HARD SURFACES







TRAILER AND IMPLEMENT TYRES

	Pag.
Radial implement tyre conversion table	138
Radial	
Endurion Trailer	141
Flotation Optimall	146
Flotation Trac	152
Flotation Pro	172
Bias	
Flotation+	180
AW	192
AS+	202
V61	206



RADIAL IMPLEMENT TYRE CONVERSION TABLE

FLOTATION TRAC	ENDURION TRAILER	FLOTATION PRO	VF FLOTATION OPTIMALL
-------------------	---------------------	------------------	-----------------------------

		Section width (mm)														
		480	500	520	560	580	600	620	650	680	710	750	800	850	900	
Overall diameter (mm)	860	480/45 R 17														
	960			520/50 R 17												
	1030		500/45 R 22.5													
	1070				560/45 R 22.5			620/40 R 22.5	650/40 R 22.5							
					560/45 R 22.5											
	1150			520/55 R 22.5			600/50 R 22.5	620/50 R 22.5			710/40 R 22.5					
							600/50 R 22.5				710/40 R 22.5					
	1250				560/60 R 22.5				650/50 R 22.5	680/50 R 22.5	710/45 R 22.5	800/40 R 22.5				
					560/60 R 22.5						710/45 R 22.5					
					560/60 R 22.5											
	1300					580/65 R 22.5										
	1360						600/55 R 26.5	620/55 R 26.5	650/55 R 26.5		710/50 R 26.5	750/45 R 26.5	800/45 R 26.5			
							600/55 R 26.5				710/50 R 26.5		800/45 R 26.5			
							600/55 R 26.5		650/55 R 26.5		710/50 R 26.5	750/45 R 26.5	800/45 R 26.5			
	1450								650/60 R 26.5							
	1500						600/60 R 30.5		650/65 R 26.5		710/50 R 30.5		800/45 R 30.5			
							600/60 R 30.5		650/65 R 26.5		710/50 R 30.5		800/45 R 30.5			
	1550										710/65 R 26 (28 LR 26)					
	1650								650/65 R 30.5				750/60 R 30.5		850/50 R 30.5	
													750/60 R 30.5			
	1800													800/60 R 32		
														800/60 R 32		
	1980													800/60 R 38		900/65 R 32 (35.5 LR 32)
	2150															900/65 R 38

FLOTATION CONCEPT EXPLAINED

THE PROVEN CONCEPT OF THE VREDESTEIN TRAXION TYRES APPLIED IN A FLOTATION TYRE



BENEFITS TRACTION ZONE

Transverse lugs and open space between lugs leading to:

- continues rolling, even in the most difficult conditions
- excellent side grip for stable driving behavior on slopes

BENEFITS COMFORT ZONE

Rubber in driving direction for continuous road contact leading to:

- excellent driving comfort
- exceptionally long tyre life



NON-PARALLEL LUGS

Unique non-parallel lugs with increasing gap from the centre to the shoulder, to easily push out the soil. This enhanced self-cleaning ensures the tyre keeps the traction, which leads to optimum productivity.



IMPLEMENT RADIAL —



ENDURION^{TRAILER}

HEAVY-DUTY TRAILER TYRES WITH A
DIRECTIONAL TREAD PATTERN, DESIGNED
FOR A SUPERIOR SERVICE LIFE

FEATURES

Heavy-duty carcass fitted with steel belt and a reinforcement ring

Traxion design with unique tread compound and a large contact area in the middle of the tyre tread

Non-parallel cleats that run from the inside to the outside of the tread

BENEFITS

Extremely robust with excellent resistance to punctures

30% longer service life*

Excellent self-cleaning properties on all types of soil

* Compared with premium competitors when tested in accordance with Vredestein R&D testing programmes

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		mm	mm	mm	mm	Pag.
22,5	560/60 R 22.5 IMP	165 D	5,0	AG 16.00	560	1245	560	3775	142
	600/50 R 22.5 IMP	163 D	5,0	AG 20.00	605	1170	535	3575	142
26,5	600/55 R 26.5 IMP	169 D	5,0	AG 20.00	610	1345	620	4140	143
	650/55 R 26.5 IMP	173 D	5,0	AG 20.00	650	1400	630	4280	143
	650/60 R 26.5 IMP	176 D	5,0	AG 20.00	660	1445	660	4415	144
	650/65 R 26.5 IMP	178 D	5,0	AG 20.00	660	1515	690	4625	144
30,5	600/60 R 30.5 IMP	173 D	5,0	AG 20.00	610	1505	690	4590	145

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

560/60 R 22.5 IMP 165 D TL ENDURION TRAILER

EAN		8714692892905					Section width		560 mm				
Nominal tyre pressure		5,0 bar					Overall diameter		1245 mm				
Tyre construction		Radial					Static loaded radius		560 mm				
Recommended rim width		AG 16.00					Rolling circumference		3775 mm				
							SRI		600				
							Tread depth		23 mm				
							Tie bar height		6 mm				
							75% of the tyre volume		256 l				
		Tyre pressure (bar)											
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	2660	3425	4185	4850	5565	6265	6890	7615	8285	8675	9115	9270
	25	2335	3005	3670	4260	4885	5500	6045	6680	7270	7615	8000	8135
	30	2235	2870	3510	4070	4665	5255	5780	6385	6950	7280	7645	7775
	40	2010	2585	3160	3665	4205	4735	5205	5750	6260	6555	6885	7005
	50	1790	2300	2810	3260	3740	4210	4630	5120	5570	5835	6125	6230
	65	1480	1900	2325	2695	3090	3480	3825	4230	4600	4820	5065	5150
	70	1345	1730	2115	2455	2810	3165	3480	3850	4190	4385	4610	4685

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/50 R 22.5 IMP 163 D TL ENDURION TRAILER

EAN		8714692805530					Section width				605 mm		
Nominal tyre pressure		5,0 bar					Overall diameter				1170 mm		
Tyre construction		Radial					Static loaded radius				535 mm		
Recommended rim width		AG 20.00					Rolling circumference				3575 mm		
							SRI				550		
							Tread depth				24 mm		
							Tie bar height				6 mm		
							75% of the tyre volume				229 l		
		Tyre pressure (bar)											
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	2515	3235	3955	4585	5255	5920	6510	7195	7830	8200	8615	8775
	25	2210	2840	3470	4025	4615	5195	5715	6315	6870	7195	7560	7705
	30	2110	2715	3315	3845	4410	4965	5460	6035	6565	6880	7225	7360
	40	1900	2445	2985	3465	3970	4475	4920	5435	5915	6195	6510	6630
	50	1690	2175	2660	3080	3535	3980	4375	4835	5260	5510	5790	5900
	65	1400	1795	2195	2545	2920	3290	3615	3995	4350	4555	4785	4875
	70	1270	1635	2000	2320	2660	2995	3290	3635	3955	4145	4355	4435

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/55 R 26.5 IMP 169 D TL ENDURION TRAILER

EAN		8714692892912					Section width				610 mm			
Nominal tyre pressure		5,0 bar					Overall diameter				1345 mm			
Tyre construction		Radial					Static loaded radius				620 mm			
Recommended rim width		AG 20.00					Rolling circumference				4140 mm			
							SRI				625			
							Tread depth				25 mm			
							Tie bar height				7 mm			
							75% of the tyre volume				302 l			
		Tyre pressure (bar)												
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00	
		Load capacity per tyre(kg)												
Speed (km/h)	10	2945	3785	4625	5365	6150	6930	7620	8420	9160	9595	10080	10440	
	25	2585	3325	4060	4710	5400	6080	6685	7390	8040	8425	8850	9165	
	30	2470	3175	3880	4500	5160	5810	6390	7065	7685	8050	8455	8760	
	40	2225	2860	3495	4055	4650	5235	5755	6360	6920	7250	7615	7890	
	50	1980	2545	3110	3605	4135	4655	5120	5660	6160	6450	6775	7020	
	65	1635	2105	2570	2980	3420	3850	4230	4680	5090	5330	5600	5800	
	70	1490	1915	2340	2715	3110	3500	3850	4255	4630	4850	5095	5280	

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/55 R 26.5 IMP 173 D TL ENDURION TRAILER

EAN		8714692892929					Section width				650 mm			
Nominal tyre pressure		5,0 bar					Overall diameter				1400 mm			
Tyre construction		Radial					Static loaded radius				630 mm			
Recommended rim width		AG 20.00					Rolling circumference				4280 mm			
							SRI				650			
							Tread depth				26 mm			
							Tie bar height				7 mm			
							75% of the tyre volume				370 l			
		Tyre pressure (bar)												
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00	
		Load capacity per tyre(kg)												
Speed (km/h)	10	3335	4290	5240	6080	6970	7850	8630	9540	10380	10870	11420	11700	
	25	2930	3765	4600	5335	6120	6890	7575	8375	9110	9545	10025	10270	
	30	2800	3600	4400	5100	5845	6585	7240	8000	8705	9120	9580	9815	
	40	2520	3240	3960	4595	5265	5930	6520	7205	7840	8215	8630	8840	
	50	2240	2885	3525	4085	4685	5275	5800	6410	6975	7310	7675	7865	
	65	1855	2385	2910	3375	3870	4360	4795	5300	5765	6040	6345	6500	
	70	1685	2170	2650	3075	3525	3970	4365	4820	5245	5495	5775	5915	

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

650/60 R 26.5 IMP 176 D TL ENDURION TRAILER

EAN		8714692805547					Section width			660 mm			
Nominal tyre pressure		5,0 bar					Overall diameter			1445 mm			
Tyre construction		Radial					Static loaded radius			660 mm			
Recommended rim width		AG 20.00					Rolling circumference			4415 mm			
							SRI			700			
							Tread depth			26 mm			
							Tie bar height			7 mm			
							75% of the tyre volume			407 l			
		Tyre pressure (bar)											
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	3610	4640	5670	6575	7540	8490	9335	10320	11230	11760	12355	12780
	25	3170	4075	4980	5775	6620	7455	8195	9060	9855	10325	10845	11220
	30	3030	3895	4760	5515	6325	7125	7835	8655	9420	9865	10365	10720
	40	2725	3505	4285	4970	5695	6415	7055	7795	8485	8885	9335	9655
	50	2425	3120	3810	4420	5070	5710	6275	6935	7550	7905	8305	8590
	65	2005	2580	3150	3655	4190	4715	5185	5735	6240	6535	6865	7100
	70	1825	2345	2865	3325	3810	4295	4720	5215	5675	5945	6245	6460

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/65 R 26.5 IMP 178 D TL ENDURION TRAILER

EAN		8714692805554					Section width		660 mm				
Nominal tyre pressure		5,0 bar					Overall diameter		1515 mm				
Tyre construction		Radial					Static loaded radius		690 mm				
Recommended rim width		AG 20.00					Rolling circumference		4625 mm				
							SRI		725				
							Tread depth		26 mm				
							Tie bar height		7 mm				
							75% of the tyre volume		463 l				
		Tyre pressure (bar)											
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	3885	4995	6105	7080	8115	9140	10050	11105	12085	12660	13295	13500
	25	3410	4385	5360	6215	7125	8020	8820	9750	10605	11110	11670	11850
	30	3260	4190	5120	5940	6805	7665	8430	9315	10135	10620	11155	11325
	40	2935	3775	4610	5350	6130	6905	7590	8390	9130	9565	10045	10200
	50	2610	3355	4105	4760	5455	6145	6755	7465	8125	8510	8940	9075
	65	2160	2775	3390	3930	4510	5075	5580	6170	6715	7030	7385	7500
	70	1965	2525	3085	3580	4105	4620	5080	5615	6110	6400	6720	6825

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/60 R 30.5 IMP 173 D TL ENDURION TRAILER

EAN		8714692892936					Section width			610 mm			
Nominal tyre pressure		5,0 bar					Overall diameter			1505 mm			
Tyre construction		Radial					Static loaded radius			690 mm			
Recommended rim width		AG 20.00					Rolling circumference			4590 mm			
							SRI			725			
							Tread depth			26 mm			
							Tie bar height			7 mm			
							75% of the tyre volume			374 l			
		Tyre pressure (bar)											
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	3390	4355	5325	6175	7080	7970	8765	9685	10540	11040	11595	11700
	25	2975	3825	4675	5420	6215	6995	7695	8505	9250	9690	10180	10270
	30	2840	3655	4465	5180	5940	6685	7350	8125	8840	9260	9730	9815
	40	2560	3290	4020	4665	5350	6020	6620	7320	7965	8340	8760	8840
	50	2275	2930	3580	4150	4760	5360	5890	6510	7085	7420	7795	7865
	65	1880	2420	2960	3430	3930	4430	4870	5380	5855	6135	6445	6500
	70	1715	2200	2690	3120	3580	4030	4430	4895	5330	5580	5865	5915

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT RADIAL —



**REDESTEIN FLOTATION
OPTIMALL VF 750/60R30.5**
 Resources Protection
 ✓ Soil preservation
 ✓ Fuel saving
 DLG Test Report 7434



FLOTATION OPTIMALL

VF TRAILER TYRE FOR OPTIMUM SOIL PRESERVATION

FEATURES

Unique Traxion concept consisting of a comfort Zone and a Traction Zone

Chamfered tread blocks with non-parallel lugs

Smooth design with rounded shoulders

BENEFITS

Excellent driving comfort on the road and continuous rolling in the field, even in the most difficult conditions

Superb self-cleaning on all soil types

Superior grassland-friendliness, especially while turning on headlands

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.	
22,5	VF 710/45 R 22.5 IMP	170 D	3,2	AG 24.00	725*	1210*	530*	3655*	147	N
26,5	VF 600/55 R 26.5 IMP	170 D	3,2	AG 20.00	610	1345	590	4075	147	N
	VF 710/50 R 26.5 IMP	176 D	3,2	AG 24.00	715	1395	615	4215	148	N
	VF 750/45 R 26.5 IMP	176 D	3,2	AG 24.00	750*	1355*	595*	4090*	148	N
	VF 800/45 R 26.5 IMP	179 D	3,2	AG 28.00	790	1395	610	4210	149	N
	VF 710/50 R 30.5 IMP	178 D	3,2	AG 24.00	715	1490	655	4500	149	N
30,5	VF 750/60 R 30.5 IMP	187 D	3,2	AG 24.00	765	1680	735	5060	150	N
	VF 800/45 R 30.5 IMP	181 D	3,2	AG 28.00	795	1495	655	4510	150	N
32	VF 800/60 R 32 IMP	191 D	3,2	DW27B	805	1795	785	5425	151	N

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

VF 710/45 R 22.5 IMP 170 D TL FLOTATION OPTIMALL

EAN		8714692805561			Section width			725* mm							
Nominal tyre pressure		3,2 bar			Overall diameter			1210* mm							
Tyre construction		Radial			Static loaded radius			530* mm							
Recommended rim width		AG 24.00			Rolling circumference			3655* mm							
					SRI			575							
					Tread depth			23 mm							
					Tie bar height			4 mm							
					75% of the tyre volume			310* l							
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	3920	5040	6100	6835	7890	8940	9840							
	25	3490	4485	5430	6085	7025	7960	8760							
	30	3370	4330	5245	5880	6780	7685	8460							
	40	3085	3965	4800	5380	6205	7030	7740							
	50	2795	3595	4355	4875	5630	6380	7020							
	65	2390	3070	3720	4170	4810	5450	6000							
	70	2175	2795	3385	3795	4375	4960	5460							

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

VF 600/55 R 26.5 IMP 170 D TL FLOTATION OPTIMALL

EAN		8714692801174			Section width			610 mm							
Nominal tyre pressure		3,2 bar			Overall diameter			1345 mm							
Tyre construction		Radial			Static loaded radius			590 mm							
Recommended rim width		AG 20.00			Rolling circumference			4075 mm							
					SRI			625							
					Tread depth			22 mm							
					Tie bar height			4 mm							
					75% of the tyre volume			314 l							
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	3875	4980	6030	6760	7795	8835	9840							
	25	3450	4435	5370	6015	6940	7865	8760							
	30	3330	4280	5185	5810	6705	7600	8460							
	40	3045	3915	4745	5315	6135	6950	7740							
	50	2765	3555	4305	4820	5565	6305	7020							
	65	2360	3035	3680	4120	4755	5390	6000							
	70	2150	2765	3345	3750	4325	4905	5460							

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

VF 710/50 R 26.5 IMP 176 D TL FLOTATION OPTIMALL

EAN		8714692800580			Section width		715 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1395 mm								
Tyre construction		Radial			Static loaded radius		615 mm								
Recommended rim width		AG 24.00			Rolling circumference		4215 mm								
					SRI		650								
					Tread depth		25 mm								
					Tie bar height		4 mm								
					75% of the tyre volume		403 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	4625	5945	7200	8070	9310	10550	11645							
	25	4115	5295	6410	7185	8290	9395	10365							
	30	3975	5110	6190	6935	8005	9070	10010							
	40	3640	4675	5665	6345	7325	8300	9160							
	50	3300	4240	5140	5755	6640	7525	8305							
	65	2820	3625	4390	4920	5675	6435	7100							
	70	2565	3300	3995	4475	5165	5855	6460							

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 750/45 R 26.5 IMP 176 D TL FLOTATION OPTIMALL

EAN		8714692805578			Section width		750* mm		
Nominal tyre pressure		3,2 bar			Overall diameter		1355* mm		
Tyre construction		Radial			Static loaded radius		595* mm		
Recommended rim width		AG 24.00			Rolling circumference		4090* mm		
					SRI		650		
					Tread depth		26 mm		
					Tie bar height		4 mm		
					75% of the tyre volume		389* l		
		Tyre pressure (bar)							
		0,80		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)							
Speed (km/h)	10	4585	5895	7140	8000	9230	10460	11645	
	25	4080	5250	6355	7120	8215	9315	10365	
	30	3940	5070	6140	6880	7935	8995	10010	
	40	3605	4635	5615	6290	7260	8230	9160	
	50	3270	4205	5095	5705	6585	7465	8305	
	65	2795	3595	4355	4880	5630	6380	7100	
	70	2545	3270	3960	4440	5120	5805	6460	

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values.

VF 800/45 R 26.5 IMP 179 D TL FLOTATION OPTIMALL

EAN		8714692800597			Section width		790 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1395 mm								
Tyre construction		Radial			Static loaded radius		610 mm								
Recommended rim width		AG 28.00			Rolling circumference		4210 mm								
					SRI		725								
					Tread depth		25 mm								
					Tie bar height		4 mm								
					75% of the tyre volume		449 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	5070	6520	7895	8845	10210	11570	12710							
	25	4515	5805	7030	7875	9090	10300	11315							
	30	4360	5605	6790	7605	8775	9945	10930							
	40	3990	5130	6210	6960	8030	9100	10000							
	50	3620	4650	5635	6310	7285	8255	9070							
	65	3090	3975	4815	5395	6225	7055	7750							
	70	2815	3620	4380	4910	5665	6420	7055							

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 710/50 R 30.5 IMP 178 D TL FLOTATION OPTIMALL

EAN		8714692805585			Section width		715 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		1490 mm	
Tyre construction		Radial			Static loaded radius		655 mm	
Recommended rim width		AG 24.00			Rolling circumference		4500 mm	
					SRI		700	
					Tread depth		28 mm	
					Tie bar height		4 mm	
					75% of the tyre volume		432 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10	4925	6330	7670	8590	9915	11235	12300
	25	4385	5635	6825	7650	8825	10000	10950
	30	4235	5445	6595	7385	8525	9660	10575
	40	3875	4980	6030	6760	7800	8840	9675
	50	3515	4515	5470	6130	7075	8015	8775
	65	3005	3860	4675	5240	6045	6850	7500
	70	2735	3515	4255	4765	5500	6235	6825

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

VF 750/60 R 30.5 IMP 187 D TL FLOTATION OPTIMALL

EAN		8714692291586			Section width		765 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1680 mm								
Tyre construction		Radial			Static loaded radius		735 mm								
Recommended rim width		AG 24.00			Rolling circumference		5060 mm								
					SRI		800								
					Tread depth		28 mm								
					Tie bar height		4 mm								
					75% of the tyre volume		654 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	6315	8120	9830	11015	12710	14405	15990							
	25	5620	7225	8750	9805	11315	12825	14235							
	30	5430	6980	8455	9470	10925	12385	13750							
	40	4965	6385	7735	8665	9995	11330	12580							
	50	4505	5790	7015	7860	9065	10275	11410							
	65	3850	4950	5995	6715	7750	8785	9750							
	70	3505	4505	5455	6110	7050	7995	8875							

For the explanation of the symbols and abbreviations, see the inside of the last page.

VF 800/45 R 30.5 IMP 181 D TL FLOTATION OPTIMALL

EAN		8714692800603				Section width		795 mm							
Nominal tyre pressure		3,2 bar				Overall diameter		1495 mm							
Tyre construction		Radial				Static loaded radius		655 mm							
Recommended rim width		AG 28.00				Rolling circumference		4510 mm							
						SRI		725							
						Tread depth		26 mm							
						Tie bar height		4 mm							
						75% of the tyre volume		489 l							
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	5400	6940	8405	9420	10865	12315	13530							
	25	4805	6180	7485	8385	9675	10965	12045							
	30	4640	5970	7225	8095	9345	10590	11635							
	40	4245	5460	6610	7410	8550	9690	10645							
	50	3850	4950	5995	6720	7755	8785	9655							
	65	3290	4230	5125	5745	6625	7510	8250							
	70	2995	3850	4665	5225	6030	6835	7510							

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT — RADIAL

VF 800/60 R 32 IMP 191 D TL FLOTATION OPTIMALL

EAN		8714692805592			Section width		805 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1795 mm								
Tyre construction		Radial			Static loaded radius		785 mm								
Recommended rim width		DW27B			Rolling circumference		5425 mm								
					SRI		850								
					Tread depth		30 mm								
					Tie bar height		4 mm								
					75% of the tyre volume		807 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	7135		9170		11110		12445		14360		16275		17875	
	25	6350		8165		9890		11080		12785		14490		15915	
	30	6135		7885		9550		10700		12345		13995		15370	
	40	5610		7215		8740		9790		11295		12800		14060	
	50	5090		6545		7925		8880		10245		11610		12755	
	65	4350		5595		6775		7590		8755		9925		10900	
	70	3960		5090		6165		6905		7970		9030		9920	

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT RADIAL —



FLOTATION *TRAC*

THE ALL ROUND FLOTATION TYRE
FOR MAXIMUM SOIL PROTECTION

FEATURES

Stable central tread and rounded shoulders

Highly flexible carcass & sturdy belt design

Robust bead construction

BENEFITS

Keeps rolling even in the most difficult conditions

Optimized footprint under varying inflation pressures

High degree of reliability



FLOTATION TRAC

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
17	480/45 R 17 IMP	140 D	4,0	16.00	480	850	395	2635	154
	520/50 R 17 IMP	147 D	4,0	16.00	505	965	445	2970	154
22.5	500/45 R 22.5 IMP	136 D	2,8	AG 16.00	500	1025	475	3130	155
	520/55 R 22.5 IMP	148 D	3,2	AG 16.00	515	1155	530	3560	155
	520/55 R 22.5 IMP	154 D	4,0	AG 16.00	515	1155	530	3560	156
	560/45 R 22.5 IMP	152 D	4,0	AG 16.00	545	1085	490	3295	156
	560/45 R 22.5 IMP	160 D	6,0	AG 16.00	530	1080	500	3350	157
	560/60 R 22.5 IMP	161 D	4,0	AG 16.00	550	1245	560	3820	157
	560/60 R 22.5 IMP	165 D	5,0	AG 16.00	550	1245	560	3820	158
	580/65 R 22.5 IMP	166 D	4,0	AG 18.00	585	1300	585	3985	158
	600/50 R 22.5 IMP	159 D	4,0	AG 20.00	600	1170	530	3615	159
	650/40 R 22.5 IMP	150 D	3,2	AG 20.00	635	1080	495	3360	159
	680/50 R 22.5 IMP	156 D	2,8	AG 20.00	670	1260	565	3880	160
	710/40 R 22.5 IMP	161 D	4,0	AG 24.00	700	1140	515	3470	160
	710/45 R 22.5 IMP	165 D	4,0	AG 24.00	730	1230	570	3780	161
	800/40 R 22.5 IMP	168 D	4,0	AG 28.00	790	1220	550	3700	161
26	710/65 R 26 IMP	179 D	4,0	DW25B	755	1565	715	4855	162
26.5	600/55 R 26.5 IMP	165 D	4,0	AG 20.00	620	1350	625	4170	162
	650/55 R 26.5 IMP	169 D	4,0	AG 20.00	650	1400	635	4300	163
	650/65 R 26.5 IMP	174 D	4,0	AG 20.00	670	1520	700	4680	163
	710/50 R 26.5 IMP	170 D	4,0	AG 24.00	740	1365	635	4265	164
	750/45 R 26.5 IMP	170 D	4,0	AG 24.00	745	1365	620	4180	164
	800/45 R 26.5 IMP	174 D	4,0	AG 28.00	800	1380	640	4300	165
30.5	600/60 R 30.5 IMP	169 D	4,0	AG 20.00	610	1505	710	4675	165
	650/65 R 30.5 IMP	176 D	4,0	AG 20.00	645	1635	755	5075	166
	710/50 R 30.5 IMP	173 D	4,0	AG 24.00	730	1495	680	4530	166
	750/60 R 30.5 IMP	181 D	4,0	AG 24.00	785	1695	785	5130	167
	800/45 R 30.5 IMP	176 D	4,0	AG 28.00	810	1510	700	4710	167
	850/50 R 30.5 IMP	182 D	4,0	AG 28.00	870	1655	725	4910	168
32	800/60 R 32 IMP	185 D	4,0	DW27B	810	1795	810	5550	168
	900/65 R 32 IMP	188 D	3,2	DW30B	915	1955	875	5965	169
38	800/60 R 38 IMP	182 D	3,2	DW27B	790	1940	885	5820	169
	900/65 R 38 IMP	191 D	3,2	DW30B	905	2110	940	6400	170

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

480/45 R 17 IMP 140 D TL FLOTATION TRAC

EAN		8714692360435				Section width				480 mm	
Nominal tyre pressure		4,0 bar				Overall diameter				850 mm	
Tyre construction		Radial				Static loaded radius				395 mm	
Recommended rim width		16.00				Rolling circumference				2635 mm	
						SRI				410	
						Tread depth				23 mm	
						Tie bar height				8 mm	
						75% of the tyre volume				88 l	
		Tyre pressure (bar)									
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre(kg)									
Speed (km/h)	10	1430	1955	2315	2655	3015	3365	3710	4085	4500	
	25	1255	1715	2035	2330	2645	2950	3255	3585	3950	
	30	1200	1640	1945	2225	2530	2820	3110	3430	3775	
	40	1080	1475	1750	2005	2280	2540	2800	3090	3400	
	50	960	1315	1555	1785	2025	2260	2495	2745	3025	
	65	795	1085	1285	1475	1675	1870	2060	2270	2500	
	70	725	985	1170	1340	1525	1700	1875	2065	2275	

For the explanation of the symbols and abbreviations, see the inside of the last page.

520/50 R 17 IMP 147 D TL FLOTATION TRAC

EAN		8714692291593				Section width		505 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		965 mm		
Tyre construction		Radial				Static loaded radius		445 mm		
Recommended rim width		16.00				Rolling circumference		2970 mm		
						SRI		450		
						Tread depth		17 mm		
						Tie bar height		6 mm		
						75% of the tyre volume		133 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	1780	2435	2890	3310	3760	4195	4635	5095	5535
	25	1565	2135	2535	2905	3300	3680	4070	4475	4860
	30	1495	2045	2425	2775	3155	3520	3890	4275	4645
	40	1345	1840	2180	2500	2840	3170	3500	3850	4180
	50	1200	1635	1940	2225	2525	2820	3115	3425	3720
	65	990	1355	1605	1840	2090	2330	2575	2830	3075
	70	900	1230	1460	1675	1900	2120	2345	2575	2800

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/45 R 22.5 IMP 136 D TL FLOTATION TRAC

EAN		8714692360442		Section width			500 mm			
Nominal tyre pressure		2,8 bar		Overall diameter			1025 mm			
Tyre construction		Radial		Static loaded radius			475 mm			
Recommended rim width		16.00		Rolling circumference			3130 mm			
				SRI			500			
				Tread depth			23 mm			
				Tie bar height			8 mm			
				75% of the tyre volume			127 l			
		Tyre pressure (bar)								
		0,80		1,20		1,60		2,00	2,40	2,80
		Load capacity per tyre(kg)								
Speed (km/h)	10	1730	2365	2805	3215	3710	4030			
	25	1520	2075	2465	2825	3260	3540			
	30	1455	1985	2355	2700	3115	3380			
	40	1310	1790	2120	2430	2805	3045			
	50	1165	1590	1885	2160	2495	2710			
	65	960	1315	1560	1785	2060	2240			
	70	875	1195	1420	1625	1875	2040			

For the explanation of the symbols and abbreviations, see the inside of the last page.

520/55 R 22.5 IMP 148 D TL FLOTATION TRAC

EAN		8714692291609		Section width		515 mm		
Nominal tyre pressure		3,2 bar		Overall diameter		1155 mm		
Tyre construction		Radial		Static loaded radius		530 mm		
Recommended rim width		AG 16.00		Rolling circumference		3560 mm		
				SRI		575		
				Tread depth		17 mm		
				Tie bar height		6 mm		
				75% of the tyre volume		193 l		
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10	2190	2995	3550	4070	4625	5155	5670
	25	1925	2630	3120	3575	4060	4525	4975
	30	1840	2510	2980	3415	3880	4325	4755
	40	1655	2260	2685	3075	3495	3895	4285
	50	1475	2015	2385	2735	3110	3465	3810
	65	1220	1665	1975	2260	2570	2865	3150
	70	1110	1515	1795	2060	2335	2605	2865

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

520/55 R 22.5 IMP 154 D TL FLOTATION TRAC

EAN				8714692291616		Section width				515 mm									
Nominal tyre pressure				4,0 bar		Overall diameter				1155 mm									
Tyre construction				Radial		Static loaded radius				530 mm									
Recommended rim width				AG 16.00		Rolling circumference				3560 mm									
						SRI				575									
						Tread depth				17 mm									
						Tie bar height				6 mm									
						75% of the tyre volume				193 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)																	
Speed (km/h)	10	2190	2995	3550	4070	4625	5155	5670	6265	6750									
	25	1925	2630	3120	3575	4060	4525	4975	5500	5925									
	30	1840	2510	2980	3415	3880	4325	4755	5255	5665									
	40	1655	2260	2685	3075	3495	3895	4285	4735	5100									
	50	1475	2015	2385	2735	3110	3465	3810	4215	4540									
	65	1220	1665	1975	2260	2570	2865	3150	3480	3750									
	70	1110	1515	1795	2060	2335	2605	2865	3170	3415									

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/45 R 22.5 IMP 152 D TL FLOTATION TRAC

EAN		8714692335532				Section width		545 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1085 mm		
Tyre construction		Radial				Static loaded radius		490 mm		
Recommended rim width		AG 16.00				Rolling circumference		3295 mm		
						SRI		525		
						Tread depth		23 mm		
						Tie bar height		8 mm		
						75% of the tyre volume		154 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	2060	2815	3340	3825	4345	4845	5400	5890	6390
	25	1810	2470	2930	3360	3815	4255	4740	5170	5610
	30	1730	2360	2800	3210	3645	4065	4530	4940	5360
	40	1555	2125	2520	2890	3285	3660	4080	4450	4830
	50	1385	1890	2245	2570	2920	3260	3630	3960	4295
	65	1145	1565	1855	2125	2415	2695	3000	3270	3550
	70	1040	1425	1690	1935	2195	2450	2730	2980	3230

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/45 R 22.5 IMP 160 D TL FLOTATION TRAC

EAN		8714692350634					Section width		545 mm				
Nominal tyre pressure		6,0 bar					Overall diameter		1085 mm				
Tyre construction		Radial					Static loaded radius		490 mm				
Recommended rim width		AG 16.00					Rolling circumference		3295 mm				
							SRI		525				
							Tread depth		23 mm				
							Tie bar height		8 mm				
							75% of the tyre volume		154 l				
		Tyre pressure (bar)											
		1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,20	5,60	6,00
		Load capacity per tyre(kg)											
Speed (km/h)	10	3235	3755	4305	4845	5400	5890	6390	6715	7050	7200	7810	8100
	25	2840	3295	3780	4255	4740	5170	5610	5895	6190	6320	6855	7110
	30	2715	3150	3610	4065	4530	4940	5360	5630	5915	6040	6555	6795
	40	2445	2835	3250	3660	4080	4450	4830	5070	5330	5440	5900	6120
	50	2175	2525	2895	3260	3630	3960	4295	4515	4740	4840	5250	5445
	65	1800	2085	2390	2695	3000	3270	3550	3730	3920	4000	4340	4500
	70	1635	1900	2175	2450	2730	2980	3230	3395	3565	3640	3950	4095

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/60 R 22.5 IMP 161 D TL FLOTATION TRAC

EAN		8714692291623				Section width		550 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1245 mm		
Tyre construction		Radial				Static loaded radius		560 mm		
Recommended rim width		AG 16.00				Rolling circumference		3820 mm		
						SRI		600		
EAN Tube		8714692285044				Tread depth		19 mm		
						Tie bar height		7 mm		
						75% of the tyre volume		251 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	2660	3635	4315	4945	5615	6265	6975	7615	8325
	25	2335	3195	3785	4340	4930	5500	6125	6680	7310
	30	2235	3050	3620	4150	4710	5255	5850	6385	6985
	40	2010	2750	3260	3735	4245	4735	5270	5750	6290
	50	1790	2445	2900	3325	3775	4210	4690	5120	5595
	65	1480	2020	2395	2745	3120	3480	3875	4230	4625
	70	1345	1840	2180	2500	2840	3165	3525	3850	4210

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

560/60 R 22.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692342653				Section width		550 mm				
Nominal tyre pressure		5,0 bar				Overall diameter		1245 mm				
Tyre construction		Radial				Static loaded radius		560 mm				
Recommended rim width		AG 16.00				Rolling circumference		3820 mm				
EAN Tube		8714692285044				SRI		600				
						Tread depth		19 mm				
						Tie bar height		7 mm				
						75% of the tyre volume		251 l				
		Tyre pressure (bar)										
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	4,80	5,00
		Load capacity per tyre(kg)										
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325	8675	9115	9270
	25	3005	3670	4260	4885	5500	6125	6680	7310	7615	8000	8135
	30	2870	3510	4070	4665	5255	5850	6385	6985	7280	7645	7775
	40	2585	3160	3665	4205	4735	5270	5750	6290	6555	6885	7005
	50	2300	2810	3260	3740	4210	4690	5120	5595	5835	6125	6230
	65	1900	2325	2695	3090	3480	3875	4230	4625	4820	5065	5150
	70	1730	2115	2455	2810	3165	3525	3850	4210	4385	4610	4685

For the explanation of the symbols and abbreviations, see the inside of the last page.

580/65 R 22.5 IMP 166 D TL FLOTATION TRAC

EAN		8714692186622				Section width		585 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1300 mm		
Tyre construction		Radial				Static loaded radius		585 mm		
Recommended rim width		AG 18.00				Rolling circumference		3985 mm		
Permitted rim width		AG 16.00				SRI		625		
						Tread depth		23 mm		
						Tie bar height		6 mm		
						75% of the tyre volume		310 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3075	4200	4980	5705	6480	7230	7950	8785	9540
	25	2695	3685	4370	5010	5690	6345	6980	7710	8375
	30	2580	3520	4175	4785	5435	6065	6670	7370	8005
	40	2320	3170	3760	4310	4895	5460	6005	6640	7210
	50	2065	2820	3345	3835	4355	4860	5345	5905	6415
	65	1705	2330	2765	3170	3600	4015	4415	4880	5300
	70	1555	2120	2515	2885	3275	3655	4020	4440	4825

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/50 R 22.5 IMP 159 D TL FLOTATION TRAC

EAN		8714692335549				Section width				600 mm									
Nominal tyre pressure		4,0 bar				Overall diameter				1170 mm									
Tyre construction		Radial				Static loaded radius				530 mm									
Recommended rim width		AG 20.00				Rolling circumference				3615 mm									
						SRI				550									
						Tread depth				23 mm									
						Tie bar height				6 mm									
						75% of the tyre volume				226 l									
		Tyre pressure (bar)																	
		0,80		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)																	
Speed (km/h)	10	2515	3435	4075	4675	5305	5920	6570	7195	7875									
	25	2210	3015	3580	4100	4660	5195	5765	6315	6915									
	30	2110	2885	3420	3920	4450	4965	5510	6035	6605									
	40	1900	2595	3080	3530	4010	4475	4965	5435	5950									
	50	1690	2310	2740	3140	3570	3980	4415	4835	5295									
	65	1400	1910	2265	2595	2950	3290	3650	3995	4375									
	70	1270	1740	2060	2360	2685	2995	3320	3635	3980									

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/40 R 22.5 IMP 150 D TL FLOTATION TRAC

EAN		8714692291524			Section width		635 mm								
Nominal tyre pressure		3,2 bar			Overall diameter		1080 mm								
Tyre construction		Radial			Static loaded radius		495 mm								
Recommended rim width		AG 20.00			Rolling circumference		3360 mm								
					SRI		525								
					Tread depth		21 mm								
					Tie bar height		8 mm								
					75% of the tyre volume		191 l								
		Tyre pressure (bar)													
		0,80		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)													
Speed (km/h)	10	2340	3195	3790	4340	4930	5500	6030							
	25	2050	2805	3325	3810	4330	4830	5295							
	30	1960	2680	3180	3645	4135	4615	5060							
	40	1765	2415	2865	3280	3725	4155	4555							
	50	1570	2145	2545	2920	3315	3700	4055							
	65	1300	1775	2105	2410	2740	3055	3350							
	70	1180	1615	1915	2195	2495	2780	3050							

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

680/50 R 22.5 IMP 156 D TL FLOTATION TRAC

EAN		8714692335556			Section width		670 mm
Nominal tyre pressure		2,8 bar			Overall diameter		1260 mm
Tyre construction		Radial			Static loaded radius		565 mm
Recommended rim width		AG 20.00			Rolling circumference		3880 mm
					SRI		600
					Tread depth		23 mm
					Tie bar height		8 mm
					75% of the tyre volume		319 l
		Tyre pressure (bar)					
		0,80	1,20	1,60	2,00	2,40	2,80
		Load capacity per tyre(kg)					
Speed (km/h)	10	3065	4185	4965	5690	6565	7200
	25	2690	3675	4355	4995	5760	6320
	30	2570	3510	4165	4770	5505	6040
	40	2315	3160	3750	4300	4960	5440
	50	2060	2815	3335	3825	4415	4840
	65	1700	2325	2760	3160	3645	4000
	70	1550	2115	2510	2875	3320	3640

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/40 R 22.5 IMP 161 D TL FLOTATION TRAC

EAN		8714692335570				Section width		700 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1140 mm		
Tyre construction		Radial				Static loaded radius		515 mm		
Recommended rim width		AG 24.00				Rolling circumference		3470 mm		
						SRI		550		
						Tread depth		23 mm		
						Tie bar height		8 mm		
						75% of the tyre volume		253 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	2680	3660	4345	4980	5655	6305	6975	7665	8325
	25	2355	3215	3815	4370	4965	5535	6125	6730	7310
	30	2250	3070	3645	4175	4745	5290	5850	6430	6985
	40	2025	2765	3280	3760	4270	4765	5270	5790	6290
	50	1800	2460	2920	3345	3800	4240	4690	5150	5595
	65	1490	2035	2415	2765	3140	3505	3875	4260	4625
	70	1355	1850	2195	2515	2860	3190	3525	3875	4210

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/45 R 22.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692183454				Section width		730 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1230 mm		
Tyre construction		Radial				Static loaded radius		570 mm		
Recommended rim width		AG 24.00				Rolling circumference		3780 mm		
						SRI		575		
EAN Tube		8714692335020				Tread depth		23 mm		
						Tie bar height		5 mm		
						75% of the tyre volume		325 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	2980	4070	4830	5535	6285	7010	7705	8520	9270
	25	2615	3570	4240	4855	5515	6150	6765	7475	8135
	30	2500	3415	4050	4640	5270	5880	6465	7145	7775
	40	2250	3075	3650	4180	4750	5295	5825	6435	7005
	50	2005	2735	3245	3720	4225	4710	5180	5725	6230
	65	1655	2260	2680	3075	3490	3895	4280	4735	5150
	70	1505	2060	2440	2795	3175	3545	3895	4305	4685

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/40 R 22.5 IMP 168 D TL FLOTATION TRAC

EAN		8714692335587				Section width				790 mm
Nominal tyre pressure		4,0 bar				Overall diameter				1220 mm
Tyre construction		Radial				Static loaded radius				550 mm
Recommended rim width		AG 28.00				Rolling circumference				3700 mm
						SRI				575
						Tread depth				23 mm
						Tie bar height				8 mm
						75% of the tyre volume				348 l
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3230	4415	5235	6000	6815	7600	8355	9235	10080
	25	2835	3875	4595	5265	5980	6670	7335	8110	8850
	30	2710	3700	4390	5035	5715	6375	7010	7750	8455
	40	2440	3335	3955	4535	5150	5740	6315	6980	7615
	50	2170	2965	3520	4035	4580	5110	5620	6210	6775
	65	1795	2450	2910	3335	3785	4220	4645	5130	5600
	70	1635	2230	2645	3035	3445	3840	4225	4670	5095

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

710/65 R 26 IMP 179 D TL FLOTATION TRAC

EAN		8714692335594				Section width		735 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1565 mm		
Tyre construction		Radial				Static loaded radius		715 mm		
Recommended rim width		DW 25B				Rolling circumference		4855 mm		
Alternative tyre size		28 LR 26				SRI		750		
						Tread depth		26 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		563 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	4580	6240	7630	9015	10285	11185	12085	12985	13950
	25	4020	5480	6695	7915	9030	9815	10610	11395	12245
	30	3840	5235	6400	7565	8630	9385	10140	10890	11705
	40	3460	4715	5765	6815	7770	8450	9130	9810	10540
	50	3075	4195	5130	6060	6915	7520	8125	8730	9380
	65	2545	3470	4240	5010	5715	6215	6715	7215	7750
	70	2315	3155	3855	4560	5200	5655	6110	6565	7055

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/55 R 26.5 IMP 165 D TL FLOTATION TRAC

EAN		8714692309885				Section width		620 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1350 mm		
Tyre construction		Radial				Static loaded radius		625 mm		
Recommended rim width		AG 20.00				Rolling circumference		4170 mm		
						SRI		625		
						Tread depth		25 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		307 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3060	4635	5560	6490	7415	7890	8345	8805	9270
	25	2685	4070	4880	5695	6510	6915	7320	7730	8135
	30	2565	3890	4665	5445	6220	6610	7000	7385	7775
	40	2310	3505	4205	4905	5605	5955	6305	6655	7005
	50	2055	3115	3740	4360	4985	5295	5605	5920	6230
	65	1700	2575	3090	3605	4120	4380	4635	4895	5150
	70	1545	2345	2810	3280	3750	3980	4215	4450	4685

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/55 R 26.5 IMP 169 D TL FLOTATION TRAC

EAN		8714692186691				Section width				650 mm
Nominal tyre pressure		4,0 bar				Overall diameter				1400 mm
Tyre construction		Radial				Static loaded radius				635 mm
Recommended rim width		AG 20.00				Rolling circumference				4300 mm
						SRI				650
						Tread depth				26 mm
						Tie bar height				8 mm
						75% of the tyre volume				368 l
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3375	4610	5470	6270	7120	7945	8735	9655	10440
	25	2965	4050	4800	5505	6250	6970	7665	8475	9165
	30	2830	3870	4590	5260	5975	6665	7325	8100	8760
	40	2550	3485	4135	4735	5380	6000	6600	7295	7890
	50	2270	3100	3680	4215	4785	5340	5870	6490	7020
	65	1875	2560	3040	3485	3955	4415	4850	5365	5800
	70	1705	2330	2765	3170	3600	4015	4415	4880	5280

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/65 R 26.5 IMP 174 D TL FLOTATION TRAC

EAN		8714692309892				Section width		660 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1520 mm		
Tyre construction		Radial				Static loaded radius		700 mm		
Recommended rim width		AG 20.00				Rolling circumference		4680 mm		
						SRI		725		
						Tread depth		26 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		464 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3980	6030	7235	8440	9650	10250	10855	11455	12060
	25	3495	5292	6350	7410	8470	8995	9525	10055	10585
	30	3340	5060	6070	7080	8090	8600	9105	9610	10115
	40	3005	4555	5465	6375	7290	7745	8200	8655	9110
	50	2675	4055	4865	5675	6485	6890	7295	7700	8105
	65	2210	3350	4020	4690	5360	5695	6030	6365	6700
	70	2010	3050	3655	4265	4875	5180	5485	5790	6095

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

710/50 R 26.5 IMP 170 D TL FLOTATION TRAC

EAN		8714692309915				Section width		725 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1380 mm		
Tyre construction		Radial				Static loaded radius		635 mm		
Recommended rim width		AG 24.00				Rolling circumference		4265 mm		
						SRI		650		
						Tread depth		25 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		392 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3565	5400	6480	7560	8640	9180	9720	10260	10800
	25	3130	4740	5690	6635	7585	8060	8530	9005	9480
	30	2990	4530	5435	6340	7250	7700	8155	8605	9060
	40	2695	4080	4895	5710	6530	6935	7345	7750	8160
	50	2395	3630	4355	5080	5810	6170	6535	6895	7260
	65	1980	3000	3600	4200	4800	5100	5400	5700	6000
	70	1800	2730	3275	3820	4370	4640	4915	5185	5460

For the explanation of the symbols and abbreviations, see the inside of the last page.

750/45 R 26.5 IMP 170 D TL FLOTATION TRAC

EAN		8714692186721				Section width		740 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1365 mm		
Tyre construction		Radial				Static loaded radius		620 mm		
Recommended rim width		AG 24.00				Rolling circumference		4180 mm		
						SRI		650		
						Tread depth		26 mm		
						Tie bar height		7 mm		
						75% of the tyre volume		397 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3485	4760	5650	6475	7355	8200	9020	9965	10800
	25	3060	4180	4960	5680	6455	7200	7915	8750	9480
	30	2925	3995	4740	5430	6170	6880	7565	8360	9060
	40	2635	3600	4270	4890	5555	6195	6815	7530	8160
	50	2345	3200	3795	4350	4945	5515	6060	6700	7260
	65	1935	2645	3140	3595	4085	4555	5010	5535	6000
	70	1760	2405	2855	3275	3715	4145	4560	5040	5460

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/45 R 26.5 IMP 174 D TL FLOTATION TRAC

EAN		8714692309908				Section width		800 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1380 mm		
Tyre construction		Radial				Static loaded radius		640 mm		
Recommended rim width		AG 28.00				Rolling circumference		4300 mm		
						SRI		675		
						Tread depth		25 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		430 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3980	5425	6635	7840	8925	9710	10490	11275	12060
	25	3495	4765	5820	6880	7835	8520	9210	9895	10585
	30	3340	4550	5565	6575	7485	8145	8800	9460	10115
	40	3005	4100	5010	5920	6740	7335	7925	8520	9110
	50	2675	3645	4460	5270	6000	6525	7050	7580	8105
	65	2210	3015	3685	4355	4960	5395	5830	6265	6700
	70	2010	2745	3350	3960	4510	4905	5305	5700	6095

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/60 R 30.5 IMP 169 D TL FLOTATION TRAC

EAN		8714692244568				Section width		610 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1505 mm		
Tyre construction		Radial				Static loaded radius		710 mm		
Recommended rim width		AG 20.00				Rolling circumference		4675 mm		
						SRI		725		
						Tread depth		26 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		371 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3525	5310	6405	7470	8530	9075	9540	10165	10440
	25	3095	4660	5620	6560	7490	7965	8375	8920	9165
	30	2955	4455	5375	6270	7155	7615	8005	8525	8760
	40	2665	4010	4840	5645	6445	6855	7210	7680	7890
	50	2370	3570	4305	5020	5735	6100	6415	6830	7020
	65	1960	2950	3560	4150	4740	5040	5300	5645	5800
	70	1780	2685	3240	3775	4310	4590	4825	5140	5280

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

650/65 R 30.5 IMP 176 D TL FLOTATION TRAC

EAN		8714692244582				Section width		645 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1635 mm		
Tyre construction		Radial				Static loaded radius		755 mm		
Recommended rim width		AG 20.00				Rolling circumference		5075 mm		
						SRI		775		
						Tread depth		26 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		502 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	4290	6455	7790	9085	10375	11040	11700	12360	12780
	25	3765	5670	6840	7975	9105	9690	10270	10850	11220
	30	3595	5415	6535	7625	8705	9260	9815	10370	10720
	40	3240	4880	5885	6865	7840	8340	8840	9340	9655
	50	2885	4340	5235	6110	6975	7420	7865	8310	8590
	65	2380	3585	4330	5050	5765	6135	6500	6870	7100
	70	2170	3265	3940	4595	5245	5580	5915	6250	6460

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/50 R 30.5 IMP 173 D TL FLOTATION TRAC

EAN		8714692175435				Section width		730 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1495 mm		
Tyre construction		Radial				Static loaded radius		680 mm		
Recommended rim width		AG 24.00				Rolling circumference		4530 mm		
						SRI		700		
						Tread depth		28 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		430 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	3895	5865	7080	8255	9425	10030	10800	11230	11700
	25	3420	5150	6215	7250	8275	8805	9480	9860	10270
	30	3270	4920	5940	6925	7910	8415	9060	9420	9815
	40	2945	4435	5350	6240	7120	7580	8160	8485	8840
	50	2620	3945	4760	5550	6335	6740	7260	7550	7865
	65	2165	3260	3930	4585	5235	5570	6000	6240	6500
	70	1970	2965	3580	4175	4765	5070	5460	5680	5915

For the explanation of the symbols and abbreviations, see the inside of the last page.

750/60 R 30.5 IMP 181 D TL FLOTATION TRAC

EAN		8714692174926				Section width		785 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1695 mm		
Tyre construction		Radial				Static loaded radius		785 mm		
Recommended rim width		AG 24.00				Rolling circumference		5130 mm		
						SRI		800		
						Tread depth		28 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		654 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	4995	7520	9075	10585	12085	12860	13500	14400	14850
	25	4385	6600	7965	9290	10610	11285	11850	12640	13035
	30	4190	6310	7615	8880	10140	10785	11325	12080	12460
	40	3775	5685	6855	8000	9130	9715	10200	10880	11220
	50	3360	5055	6100	7115	8125	8645	9075	9680	9985
	65	2775	4180	5040	5880	6715	7145	7500	8000	8250
	70	2525	3800	4590	5350	6110	6500	6825	7280	7510

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/45 R 30.5 IMP 176 D TL FLOTATION TRAC

EAN		8714692244605				Section width		810 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1510 mm		
Tyre construction		Radial				Static loaded radius		700 mm		
Recommended rim width		AG 28.00				Rolling circumference		4710 mm		
						SRI		725		
						Tread depth		26 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		498 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	4230	5770	7055	8335	9510	10340	11175	12005	12780
	25	3715	5065	6190	7315	8345	9075	9810	10535	11220
	30	3550	4840	5915	6995	7975	8675	9375	10070	10720
	40	3200	4360	5330	6300	7185	7815	8445	9070	9655
	50	2845	3880	4740	5605	6390	6950	7510	8070	8590
	65	2350	3205	3920	4630	5285	5745	6210	6670	7100
	70	2140	2920	3565	4215	4805	5230	5650	6070	6460

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

850/50 R 30.5 IMP 182 D TL FLOTATION TRAC

EAN		8714692174940				Section width		870 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1655 mm		
Tyre construction		Radial				Static loaded radius		725 mm		
Recommended rim width		AG 28.00				Rolling circumference		4910 mm		
						SRI		775		
						Tread depth		28 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		676 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60		2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	5155	7765	9365	10925	12475	13270	14075	14860	15300
	25	4525	6815	8220	9590	10950	11650	12355	13045	13430
	30	4325	6510	7855	9165	10465	11135	11810	12465	12835
	40	3895	5865	7075	8255	9425	10025	10635	11230	11560
	50	3465	5220	6295	7345	8385	8920	9465	9990	10285
	65	2865	4315	5205	6070	6930	7375	7820	8255	8500
	70	2605	3925	4735	5525	6305	6710	7115	7515	7735

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/60 R 32 IMP 185 D TL FLOTATION TRAC

EAN		8714692291548				Section width		810 mm		
Nominal tyre pressure		4,0 bar				Overall diameter		1795 mm		
Tyre construction		Radial				Static loaded radius		810 mm		
Recommended rim width		DW 27B				Rolling circumference		5550 mm		
						SRI		825		
						Tread depth		28 mm		
						Tie bar height		9 mm		
						75% of the tyre volume		777 l		
		Tyre pressure (bar)								
		0,80	1,20	1,60		2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)								
Speed (km/h)	10	5620	8060	9785	11490	13110	14095	15090	16065	16650
	25	4930	7075	8590	10085	11510	12375	13245	14105	14615
	30	4715	6765	8210	9635	11000	11825	12660	13480	13970
	40	4245	6090	7395	8680	9905	10650	11400	12140	12580
	50	3775	5420	6580	7725	8815	9475	10145	10800	11195
	65	3120	4480	5435	6380	7285	7830	8385	8925	9250
	70	2840	4075	4950	5810	6630	7125	7630	8125	8420

For the explanation of the symbols and abbreviations, see the inside of the last page.

900/65 R 32 IMP 188 D TL FLOTATION TRAC

EAN	8714692360879	Section width	915 mm
Nominal tyre pressure	3,2 bar	Overall diameter	1955 mm
Tyre construction	Radial	Static loaded radius	875 mm
Recommended rim width	DW 30B	Rolling circumference	5965 mm
Permitted rim width	DH31, DW31	SRI	925
Alternative tyre size (s)	35.5 LR 32	Tread depth (including tie bar)	31 mm
		75% of the tyre volume	1078 l

		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10	7050	9630	11425	13095	14875	16590	18000
	25	6190	8455	10030	11495	13055	14560	15800
	30	5915	8080	9585	10985	12475	13915	15100
	40	5325	7280	8635	9895	11235	12535	13600
	50	4740	6475	7680	8805	10000	11150	12100
	65	3915	5350	6350	7275	8265	9215	10000
	70	3565	4870	5775	6620	7520	8385	9100

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/60 R 38 IMP 182 D TL FLOTATION TRAC

EAN	8714692805608	Section width	790 mm
Nominal tyre pressure	3,2 bar	Overall diameter	1940 mm
Tyre construction	Radial	Static loaded radius	885 mm
Recommended rim width	DW27B	Rolling circumference	5820 mm
		SRI	925
		Tread depth (including tie bar)	31 mm
		75% of the tyre volume	851 l

		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10	5840	7980	9465	10850	12320	13745	15300
	25	5130	7005	8310	9525	10815	12065	13430
	30	4900	6695	7940	9100	10335	11530	12835
	40	4415	6030	7155	8195	9310	10385	11560
	50	3925	5365	6365	7295	8285	9240	10285
	65	3245	4435	5260	6025	6845	7635	8500
	70	2955	4035	4785	5485	6230	6950	7735

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

900/65 R 38 IMP 191 D TL FLOTATION TRAC								
EAN		8714692360893			Section width		905 mm	
Nominal tyre pressure		3,2 bar			Overall diameter		2110 mm	
Tyre construction		Radial			Static loaded radius		940 mm	
Recommended rim width		DW 30B			Rolling circumference		6400 mm	
Permitted rim width		DH31, DW31			SRI		1025	
Alternative tyre size (s)		35.5 LR 38			Tread depth (including tie bar)		31 mm	
					75% of the tyre volume		1189 l	
		Tyre pressure (bar)						
		0,80	1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)						
Speed (km/h)	10	7555	10320	12245	14030	15935	17775	19620
	25	6630	9060	10745	12315	13990	15600	17220
	30	6340	8660	10270	11770	13370	14910	16460
	40	5710	7795	9250	10600	12040	13430	14825
	50	5080	6935	8230	9430	10710	11950	13190
	65	4195	5735	6800	7795	8855	9875	10900
	70	3820	5215	6190	7095	8055	8985	9920

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT RADIAL —



FLOTATION ^{PRO}

MEETS THE HIGH DEMANDS
OF PROFESSIONALS

FEATURES

High rubber content in profile
Flexible and strong carcass
Flat contour & rounded shoulders

BENEFITS

Minimal rutting, long lifespan
Good flotation properties, high comfort level
No damage to vulnerable crops



FLOTATION PRO

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
22.5	560/45 R 22.5 IMP	152 D	4,0	AG 16.00	545	1085	490	3295	174
	560/60 R 22.5 IMP	161 D	4,0	AG 16.00	565	1250	560	3850	174
	560/60 R 22.5 IMP	165 D	5,0	AG 16.00	565	1250	560	3850	175
	620/40 R 22.5 IMP	148 D	3,2	AG 20.00	610	1080	495	3330	175
	620/40 R 22.5 IMP	154 D	4,0	AG 20.00	610	1080	495	3330	176
	620/50 R 22.5 IMP	154 D	3,2	AG 20.00	610	1185	540	3640	176
	620/50 R 22.5 IMP	161 D	4,0	AG 20.00	610	1185	540	3640	177
	650/50 R 22.5 IMP	163 D	4,0	AG 20.00	645	1250	560	3850	177
	710/40 R 22.5 IMP	161 D	4,0	AG 24.00	705	1140	520	3520	178
26.5	620/55 R 26.5 IMP	166 D	4,0	AG 20.00	625	1360	620	4200	178
	710/50 R 26.5 IMP	170 D	4,0	AG 24.00	710	1360	620	4200	179
	800/45 R 26.5 IMP	174 D	4,0	AG 28.00	800	1370	625	4200	179

For the explanation of the symbols and abbreviations, see the inside of the last page.



IMPLEMENT RADIAL —

560/45 R 22.5 IMP 152 D TL FLOTATION PRO

EAN		8714692080869			Section width			545 mm	
Nominal tyre pressure		4,0 bar			Overall diameter			1085 mm	
Tyre construction		Radial			Static loaded radius			490 mm	
Recommended rim width		AG 16.00			Rolling circumference			3295 mm	
					SRI			525	
					Tread depth			17 mm	
					75% of the tyre volume			170 l	
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)							
Speed (km/h)	10	2650	3235	3755	4305	4845	5400	5890	6390
	25	2325	2840	3295	3780	4255	4740	5170	5610
	30	2220	2715	3150	3610	4065	4530	4940	5360
	40	2000	2445	2835	3250	3660	4080	4450	4830
	50	1780	2175	2525	2895	3260	3630	3960	4295
	65	1470	1800	2085	2390	2695	3000	3270	3550
	70	1340	1635	1900	2175	2450	2730	2980	3230

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/60 R 22.5 IMP 161 D TL FLOTATION PRO

EAN		8714692080906			Section width			565 mm		
Nominal tyre pressure		4,0 bar			Overall diameter			1260 mm		
Tyre construction		Radial			Static loaded radius			560 mm		
Recommended rim width		AG 16.00			Rolling circumference			3850 mm		
EAN Tube		8714692285516			SRI			600		
					Tread depth			17 mm		
					75% of the tyre volume			264 l		
		Tyre pressure (bar)								
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325	
	25	3005	3670	4260	4885	5500	6125	6680	7310	
	30	2870	3510	4070	4665	5255	5850	6385	6985	
	40	2585	3160	3665	4205	4735	5270	5750	6290	
	50	2300	2810	3260	3740	4210	4690	5120	5595	
	65	1900	2325	2695	3090	3480	3875	4230	4625	
	70	1730	2115	2455	2810	3165	3525	3850	4210	

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/60 R 22.5 IMP 165 D TL FLOTATION PRO

EAN		8714692342646				Section width				565 mm	
Nominal tyre pressure		5,0 bar				Overall diameter				1260 mm	
Tyre construction		Radial				Static loaded radius				560 mm	
Recommended rim width		AG 16.00				Rolling circumference				3850 mm	
						SRI				600	
EAN Tube		8714692285516				Tread depth				17 mm	
						75% of the tyre volume				264 l	
		Tyre pressure (bar)									
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	4,40	5,00
		Load capacity per tyre(kg)									
Speed (km/h)	10	3425	4185	4850	5565	6265	6975	7615	8325	8675	9270
	25	3005	3670	4260	4885	5500	6125	6680	7310	7615	8135
	30	2870	3510	4070	4665	5255	5850	6385	6985	7280	7775
	40	2585	3160	3665	4205	4735	5270	5750	6290	6555	7005
	50	2300	2810	3260	3740	4210	4690	5120	5595	5835	6230
	65	1900	2325	2695	3090	3480	3875	4230	4625	4820	5150
	70	1730	2115	2455	2810	3165	3525	3850	4210	4385	4685

For the explanation of the symbols and abbreviations, see the inside of the last page.

620/40 R 22.5 IMP 148 D TL FLOTATION PRO

EAN		8714692106842		Section width		610 mm	
Nominal tyre pressure		3,2 bar		Overall diameter		1090 mm	
Tyre construction		Radial		Static loaded radius		495 mm	
Recommended rim width		AG 20.00		Rolling circumference		3330 mm	
				SRI		525	
				Tread depth		17 mm	
				75% of the tyre volume		190 l	
		Tyre pressure (bar)					
		1,20	1,60	2,00	2,40	2,80	3,20
		Load capacity per tyre(kg)					
Speed (km/h)	10	2795	3415	3960	4540	5115	5670
	25	2455	3000	3480	3985	4490	4975
	30	2345	2865	3325	3810	4290	4755
	40	2110	2580	2995	3430	3865	4285
	50	1880	2295	2665	3055	3440	3810
	65	1555	1900	2200	2525	2840	3150
	70	1415	1725	2005	2295	2585	2865

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

620/40 R 22.5 IMP 154 D TL FLOTATION PRO									
EAN				8714692155178		Section width		610 mm	
Nominal tyre pressure				4,0 bar		Overall diameter		1080 mm	
Tyre construction				Radial		Static loaded radius		495 mm	
Recommended rim width				AG 20.00		Rolling circumference		3330 mm	
						SRI		525	
						Tread depth		17 mm	
						75% of the tyre volume		190 l	
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)							
Speed (km/h)	10	2795	3415	3960	4540	5115	5670	6215	6750
	25	2455	3000	3480	3985	4490	4975	5455	5925
	30	2345	2865	3325	3810	4290	4755	5215	5665
	40	2110	2580	2995	3430	3865	4285	4695	5100
	50	1880	2295	2665	3055	3440	3810	4180	4540
	65	1555	1900	2200	2525	2840	3150	3455	3750
	70	1415	1725	2005	2295	2585	2865	3145	3415

For the explanation of the symbols and abbreviations, see the inside of the last page.

620/50 R 22.5 IMP 154 D TL FLOTATION PRO													
EAN			8714692106859			Section width		610 mm					
Nominal tyre pressure			3,2 bar			Overall diameter		1185 mm					
Tyre construction			Radial			Static loaded radius		540 mm					
Recommended rim width			AG 20.00			Rolling circumference		3640 mm					
						SRI		575					
						Tread depth		17 mm					
						75% of the tyre volume		239 l					
		Tyre pressure (bar)											
		1,20		1,60		2,00		2,40		2,80		3,20	
		Load capacity per tyre(kg)											
Speed (km/h)	10	3405	4160	4825	5535	6230	6750						
	25	2990	3655	4235	4855	5470	5925						
	30	2855	3490	4050	4640	5225	5665						
	40	2575	3145	3645	4180	4710	5100						
	50	2290	2800	3245	3720	4190	4540						
	65	1890	2310	2680	3075	3460	3750						
	70	1720	2105	2440	2800	3150	3415						

For the explanation of the symbols and abbreviations, see the inside of the last page.

620/50 R 22.5 IMP TL 161 D FLOTATION PRO

EAN				8714692159855		Section width				610 mm							
Nominal tyre pressure				4,0 bar		Overall diameter				1185 mm							
Tyre construction				Radial		Static loaded radius				540 mm							
Recommended rim width				AG 20.00		Rolling circumference				3640 mm							
						SRI				575							
						Tread depth				17 mm							
						75% of the tyre volume				239 l							
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10	3405	4160	4825	5535	6230	6750	7575	8325								
	25	2990	3655	4235	4855	5470	5925	6650	7310								
	30	2855	3490	4050	4640	5225	5665	6355	6985								
	40	2575	3145	3645	4180	4710	5100	5720	6290								
	50	2290	2800	3245	3720	4190	4540	5090	5595								
	65	1890	2310	2680	3075	3460	3750	4205	4625								
	70	1720	2105	2440	2800	3150	3415	3830	4210								

For the explanation of the symbols and abbreviations, see the inside of the last page.

650/50 R 22.5 IMP 163 D TL FLOTATION PRO

EAN		8714692080920			Section width				645 mm								
Nominal tyre pressure		4,0 bar			Overall diameter				1250 mm								
Tyre construction		Radial			Static loaded radius				560 mm								
Recommended rim width		AG 20.00			Rolling circumference				3850 mm								
					SRI				575								
					Tread depth				17 mm								
					Tie bar height				0 mm								
					75% of the tyre volume				304 l								
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10	3670	4485	5200	5960	6710	7425	8155	8775								
	25	3220	3935	4565	5230	5890	6520	7160	7705								
	30	3075	3760	4360	5000	5630	6230	6845	7360								
	40	2770	3385	3930	4505	5070	5610	6165	6630								
	50	2465	3015	3495	4005	4510	4990	5485	5900								
	65	2040	2490	2890	3310	3730	4125	4530	4875								
	70	1855	2265	2630	3015	3395	3755	4125	4435								

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT RADIAL —

710/40 R 22.5 IMP 161 D TL FLOTATION PRO

EAN		8714692295560			Section width			705 mm		
Nominal tyre pressure		4,0 bar			Overall diameter			1140 mm		
Tyre construction		Radial			Static loaded radius			520 mm		
Recommended rim width		AG 24.00			Rolling circumference			3520 mm		
					SRI			550		
					Tread depth			17 mm		
					75% of the tyre volume			250 l		
		Tyre pressure (bar)								
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10	3445	4210	4885	5600	6305	6975	7665	8325	
	25	3025	3695	4290	4915	5535	6125	6730	7310	
	30	2890	3535	4100	4700	5290	5850	6430	6985	
	40	2605	3185	3690	4230	4765	5270	5790	6290	
	50	2315	2830	3285	3765	4240	4690	5150	5595	
	65	1915	2340	2715	3110	3505	3875	4260	4625	
	70	1740	2130	2470	2830	3190	3525	3875	4210	

For the explanation of the symbols and abbreviations, see the inside of the last page.

620/55 R 26.5 IMP 166 D TL FLOTATION PRO

EAN		8714692110221			Section width		625 mm		
Nominal tyre pressure		4,0 bar			Overall diameter		1360 mm		
Tyre construction		Radial			Static loaded radius		620 mm		
Recommended rim width		AG 20.00			Rolling circumference		4200 mm		
					SRI		650		
					Tread depth		19 mm		
					75% of the tyre volume		327 l		
		Tyre pressure (bar)							
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00
		Load capacity per tyre(kg)							
Speed (km/h)	10	3985	4870	5645	6475	7290	8100	8860	9540
	25	3495	4275	4955	5685	6400	7110	7775	8375
	30	3340	4085	4735	5430	6115	6795	7435	8005
	40	3010	3680	4265	4890	5510	6120	6695	7210
	50	2680	3275	3795	4350	4900	5445	5955	6415
	65	2215	2705	3135	3595	4050	4500	4920	5300
	70	2015	2460	2855	3275	3685	4095	4480	4825

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/50 R 26.5 IMP 170 D TL FLOTATION PRO

EAN				8714692198700		Section width				710 mm							
Nominal tyre pressure				4,0 bar		Overall diameter				1360 mm							
Tyre construction				Radial		Static loaded radius				620 mm							
Recommended rim width				AG 24.00		Rolling circumference				4200 mm							
						SRI				650							
						Tread depth				19 mm							
						75% of the tyre volume				374 l							
		Tyre pressure (bar)															
		1,20		1,60		2,00		2,40		2,80		3,20		3,60		4,00	
		Load capacity per tyre(kg)															
Speed (km/h)	10	4450	5440	6310	7235	8145	9000	9900	10800								
	25	3905	4775	5540	6350	7150	7900	8690	9480								
	30	3735	4565	5290	6070	6835	7550	8305	9060								
	40	3365	4110	4765	5465	6155	6800	7480	8160								
	50	2990	3655	4240	4860	5475	6050	6655	7260								
	65	2475	3020	3505	4020	4525	5000	5500	6000								
	70	2250	2750	3190	3655	4120	4550	5005	5460								

For the explanation of the symbols and abbreviations, see the inside of the last page.

800/45 R 26.5 IMP 174 D TL FLOTATION PRO

EAN		8714692198724			Section width			800 mm		
Nominal tyre pressure		4,0 bar			Overall diameter			1370 mm		
Tyre construction		Radial			Static loaded radius			625 mm		
Recommended rim width		AG 28.00			Rolling circumference			4200 mm		
					SRI			675		
					Tread depth			19 mm		
					75% of the tyre volume			423 l		
		Tyre pressure (bar)								
		1,20	1,60	2,00	2,40	2,80	3,20	3,60	4,00	
		Load capacity per tyre(kg)								
Speed (km/h)	10	4955	6060	7025	8055	9070	10080	11025	12060	
	25	4350	5320	6165	7070	7960	8850	9675	10585	
	30	4160	5080	5895	6755	7610	8455	9250	10115	
	40	3745	4575	5310	6085	6855	7615	8330	9110	
	50	3330	4070	4725	5415	6095	6775	7410	8105	
	65	2755	3365	3905	4475	5040	5600	6125	6700	
	70	2505	3065	3550	4070	4585	5095	5575	6095	

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT BIAS



FLOTATION+

IDEAL FOR HEAVY DUTY WORK

FEATURES

Sophisticated carcass construction

Large contact area

Good height/width ratio

BENEFITS

High load capacity

Minimal soil compaction

Exceptional stability



FLOTATION+

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
15.3	260/70 - 15.3 IMP	122 A8	3,2	9.00	270	755	345	2280	182
	260/70 - 15.3 IMP	131 A8	5,0	9.00	270	755	345	2280	182
	300/80 - 15.3 IMP	132 A8	2,8	9.00	295	865	385	2575	183
	300/80 - 15.3 IMP	141 A8	4,0	9.00	295	865	385	2575	183
15.5	400/60 - 15.5 IMP	145 A8	3,6	AG 13.00	410	850	380	2530	184
16	340/55 - 16 IMP	133 A8	3,2	11	345	780	365	2360	184
17	380/55 - 17 IMP	133 A8	2,4	13.00	380	845	385	2530	185
	380/55 - 17 IMP	138 A8	2,8	13.00	380	845	385	2530	185
	480/45 - 17 IMP	140 A8	2,4	16.00	480	860	400	2565	186
	480/45 - 17 IMP	146 A8	3,2	16.00	480	860	400	2565	186
	500/50 - 17 IMP	140 A8	2,0	16.00	500	950	430	2890	187
	500/50 - 17 IMP	149 A8	2,8	16.00	500	950	430	2890	187
20	400/70 - 20 IMP	150 A8	2,8	14	420	1080	485	3215	188
	460/65 - 20 IMP	155 A8	2,8	14	460	1100	485	3300	188
	500/55 - 20 IMP	150 A8	2,4	16.00	515	1060	475	3160	189
22.5	560/60 - 22.5 IMP	167 A8	2,8	AG 16.00	565	1240	550	3700	189
	600/55 - 22.5 IMP	168 A8	2,8	AG 20.00	625	1230	550	3700	190
	710/45 - 22.5 IMP	171 A8	2,8	AG 24.00	730	1240	550	3700	190

For the explanation of the symbols and abbreviations, see the inside of the last page.

260/70 - 15.3 IMP 122 A8 TL FLOTATION+

EAN		8714692174803			Section width		270 mm		
Nominal tyre pressure		3,2 bar			Overall diameter		755 mm		
Tyre construction		Diagonaal			Static loaded radius		345 mm		
Recommended rim width		9.00			Rolling circumference		2280 mm		
EAN Tube		8714692239007			Tread depth		10 mm		
		Tyre pressure (bar)							
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00
		LLV							Load capacity per tyre(kg)
Speed (km/h)	10	885	1110	1330	1550	1770	1990	2100	2550
	25	755	940	1130	1320	1510	1690	1790	2160
	30	710	885	1060	1240	1420	1590	1680	2040
	40		790	950	1110	1260	1420	1500	1820
	50			855	995	1140	1280	1350	1640

For the explanation of the symbols and abbreviations, see the inside of the last page.

260/70 - 15.3 IMP 131 A8 TL FLOTATION+

EAN		8714692174827				Section width		270 mm			
Nominal tyre pressure		5,0 bar				Overall diameter		755 mm			
Tyre construction		Diagonaal				Static loaded radius		345 mm			
Recommended rim width		9.00				Rolling circumference		2280 mm			
						Tread depth		10 mm			
EAN Tube		8714692239007									
		Tyre pressure (bar)									
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	6,00
		LLV									
		Load capacity per tyre(kg)									
		HLV									
Speed (km/h)	10	780	1020	1270	1510	1760	2000	2240	2490	2730	3220
	25	665	870	1080	1280	1490	1700	1910	2110	2320	2740
	30	625	820	1010	1210	1400	1600	1790	1990	2180	2570
	40		730	905	1080	1250	1430	1600	1780	1950	2300
	50			815	970	1130	1290	1440	1600	1760	2070

For the explanation of the symbols and abbreviations, see the inside of the last page.

300/80 - 15.3 IMP 132 A8 TL FLOTATION+

EAN		8714692174834					Section width					295 mm	
Nominal tyre pressure		2,8 bar					Overall diameter					865 mm	
Tyre construction		Diagonaal					Static loaded radius					385 mm	
Recommended rim width		9.00					Rolling circumference					2575 mm	
EAN Tube		8714692239014					Tread depth					11 mm	
		Tyre pressure (bar)											
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40	
		LLV Load capacity per tyre(kg)										HLV	
Speed (km/h)	10	1320	1480	1650	1810	1980	2140	2310	2470	2630	2800	3300	
	25	1120	1260	1400	1540	1680	1820	1960	2100	2240	2380	2800	
	30	1050	1190	1320	1450	1580	1710	1840	1980	2110	2240	2630	
	40			1180	1290	1410	1530	1650	1760	1880	2000	2350	
	50					1270	1380	1480	1590	1690	1800	2120	

For the explanation of the symbols and abbreviations, see the inside of the last page.

300/80 - 15.3 IMP 141 A8 TL FLOTATION+

EAN		8714692174858					Section width		295 mm		
Nominal tyre pressure		4,0 bar					Overall diameter		865 mm		
Tyre construction		Diagonaal					Static loaded radius		385 mm		
Recommended rim width		9.00					Rolling circumference		2575 mm		
EAN Tube		8714692239014					Tread depth		11 mm		
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,80	4,00	5,00
		LLV Load capacity per tyre(kg)									
Speed (km/h)	10	1260	1570	1890	2200	2520	2830	3140	3440	3600	4400
	25	1070	1340	1600	1870	2140	2410	2670	2930	3060	3740
	30	1010	1260	1510	1760	2010	2270	2520	2760	2890	3520
	40		1120	1350	1570	1800	2020	2250	2460	2580	3140
	50			1210	1420	1620	1820	2020	2220	2320	2820

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/60 - 15.5 IMP 145 A8 TL FLOTATION+

EAN				8714692076787		Section width				410 mm	
Nominal tyre pressure				3,6 bar		Overall diameter				850 mm	
Tyre construction				Diagonaal		Static loaded radius				380 mm	
Recommended rim width				AG 13.00		Rolling circumference				2530 mm	
						Tread depth				14 mm	
EAN Tube				8714692239038							
		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40	
		LLV								Load capacity per tyre(kg)	
										HLV	
Speed (km/h)	10	1550	1940	2320	2710	3100	3480	3880	4060	4840	
	25	1320	1640	1970	2300	2630	2960	3280	3460	4120	
	30	1240	1550	1860	2170	2480	2790	3100	3260	3880	
	40		1380	1660	1940	2210	2490	2760	2900	3460	
	50			1490	1740	1990	2240	2490	2610	3120	

For the explanation of the symbols and abbreviations, see the inside of the last page.

340/55 - 16 IMP 133 A8 TL FLOTATION+

EAN		8714692220432			Section width		345 mm			
Nominal tyre pressure		3,2 bar			Overall diameter		780 mm			
Tyre construction		Diagonaal			Static loaded radius		365 mm			
Recommended rim width		11			Rolling circumference		2360 mm			
					Tread depth		14 mm			
		Tyre pressure (bar)								
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00	
		LLV								Load capacity per tyre(kg)
Speed (km/h)	10	1300	1590	1870	2160	2450	2740	2880	3460	
	25	1100	1350	1590	1840	2080	2330	2450	2940	
	30	1040	1270	1500	1730	1960	2190	2310	2770	
	40		1130	1340	1540	1750	1960	2060	2470	
	50			1210	1390	1580	1760	1850	2220	

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/55 - 17 IMP 133 A8 TL FLOTATION+

EAN		8714692236396				Section width				380 mm
Nominal tyre pressure		2,4 bar				Overall diameter				845 mm
Tyre construction		Diagonaal				Static loaded radius				385 mm
Recommended rim width		13.00				Rolling circumference				2530 mm
						Tread depth				15 mm
EAN Tube		8714692239069								
		Tyre pressure (bar)								
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00
		LLV	Load capacity per tyre(kg)							HLV
Speed (km/h)	10	1540	1730	1920	2110	2310	2500	2690	2880	3460
	25	1310	1470	1630	1800	1960	2120	2290	2450	2940
	30	1230	1380	1540	1690	1850	2000	2150	2310	2770
	40			1370	1510	1650	1790	1920	2060	2470
	50					1480	1610	1730	1850	2220

For the explanation of the symbols and abbreviations, see the inside of the last page.

380/55 - 17 IMP 138 A8 TL FLOTATION+

EAN		8714692076770					Section width					380 mm	
Nominal tyre pressure		2,8 bar					Overall diameter					845 mm	
Tyre construction		Diagonaal					Static loaded radius					385 mm	
Recommended rim width		13.00					Rolling circumference					2530 mm	
EAN Tube		8714692239069					Tread depth					15 mm	
		Tyre pressure (bar)											
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40	
		LLV Load capacity per tyre(kg)										HLV	
Speed (km/h)	10	1560	1760	1950	2150	2340	2540	2740	2930	3120	3320	3900	
	25	1330	1490	1660	1830	1990	2160	2330	2490	2660	2820	3320	
	30	1250	1410	1560	1720	1880	2030	2190	2340	2500	2660	3120	
	40			1400	1540	1670	1810	1950	2090	2230	2370	2790	
	50					1510	1630	1760	1880	2010	2140	2510	

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/45 - 17 IMP 140 A8 TL FLOTATION+

EAN		8714692220418				Section width				480 mm
Nominal tyre pressure		2,4 bar				Overall diameter				860 mm
Tyre construction		Diagonaal				Static loaded radius				400 mm
Recommended rim width		16.00				Rolling circumference				2565 mm
EAN Tube		8714692239106				Tread depth				15 mm
		Tyre pressure (bar)								
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00
		LLV								HLV
		Load capacity per tyre(kg)								
Speed (km/h)	10	1870	2100	2330	2570	2800	3040	3260	3500	4200
	25	1590	1780	1980	2180	2380	2580	2780	2970	3580
	30	1490	1680	1870	2050	2240	2430	2610	2800	3360
	40			1670	1830	2000	2170	2330	2500	3000
	50					1800	1950	2100	2250	2700

For the explanation of the symbols and abbreviations, see the inside of the last page.

480/45 - 17 IMP 146 A8 TL FLOTATION+

EAN		8714692220425			Section width		480 mm		
Nominal tyre pressure		3,2 bar			Overall diameter		860 mm		
Tyre construction		Diagonaal			Static loaded radius		400 mm		
Recommended rim width		16.00			Rolling circumference		2565 mm		
EAN Tube		8714692239106			Tread depth		15 mm		
		Tyre pressure (bar)							
		1,00	1,40	1,80	2,20	2,60	3,00	3,20	4,00
		LLV							Load capacity per tyre(kg)
Speed (km/h)	10	1890	2310	2730	3160	3580	4000	4200	5040
	25	1610	1960	2320	2680	3040	3400	3580	4280
	30	1510	1850	2180	2520	2860	3200	3360	4040
	40		1650	1950	2250	2550	2850	3000	3600
	50			1750	2030	2300	2570	2700	3240

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/50 - 17 IMP 140 A8 TL FLOTATION+

EAN		8714692201004			Section width		500 mm						
Nominal tyre pressure		2,0 bar			Overall diameter		950 mm						
Tyre construction		Diagonaal			Static loaded radius		430 mm						
Recommended rim width		16.00			Rolling circumference		2890 mm						
EAN Tube		8714692239083			Tread depth		15 mm						
		Tyre pressure (bar)											
		1,00		1,25		1,50		1,75		2,00		2,50	
		LLV		Load capacity per tyre(kg)						HLV			
Speed (km/h)	10	2150		2490		2830		3160		3500		4180	
	25	1830		2120		2400		2690		2980		3540	
	30	1720		1990		2260		2530		2800		3340	
	40					2020		2260		2500		2980	
	50									2250		2680	

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/50 - 17 IMP 149 A8 TL FLOTATION+

EAN		8714692201042				Section width				500 mm		
Nominal tyre pressure		2,8 bar				Overall diameter				950 mm		
Tyre construction		Diagonaal				Static loaded radius				430 mm		
Recommended rim width		16.00				Rolling circumference				2890 mm		
EAN Tube		8714692239083				Tread depth				15 mm		
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		Load capacity per tyre(kg)										HLV
Speed (km/h)	10	2140	2410	2680	2940	3220	3480	3740	4020	4280	4540	5360
	25	1820	2050	2270	2500	2730	2960	3180	3420	3640	3860	4540
	30	1710	1930	2140	2360	2570	2780	3000	3220	3420	3640	4280
	40			1910	2100	2290	2490	2680	2870	3060	3240	3820
	50					2060	2240	2410	2580	2750	2920	3440

For the explanation of the symbols and abbreviations, see the inside of the last page.

400/70 - 20 IMP 150 A8 TL FLOTATION+

EAN		8714692235245				Section width		420 mm				
Nominal tyre pressure		2,8 bar				Overall diameter		1080 mm				
Tyre construction		Diagonaal				Static loaded radius		485 mm				
Recommended rim width		14				Rolling circumference		3215 mm				
EAN Tube		8714692239113				Tread depth		14 mm				
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		LLV										
		Load capacity per tyre(kg)										
		HLV										
Speed (km/h)	10	2280	2550	2810	3080	3340	3620	3880	4160	4420	4680	5500
	25	1940	2160	2390	2620	2850	3080	3300	3540	3760	3980	4660
	30	1820	2040	2250	2470	2680	2890	3100	3320	3540	3760	4400
	40			2010	2200	2390	2580	2780	2970	3160	3340	3920
	50					2150	2330	2500	2670	2840	3020	3540

For the explanation of the symbols and abbreviations, see the inside of the last page.

460/65 - 20 IMP 155 A8 TL FLOTATION+

EAN		8714692235252				Section width		460 mm				
Nominal tyre pressure		2,8 bar				Overall diameter		1100 mm				
Tyre construction		Diagonaal				Static loaded radius		485 mm				
Recommended rim width		14				Rolling circumference		3300 mm				
EAN Tube		8714692239113				Tread depth		14 mm				
		Tyre pressure (bar)										
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,40
		LLV										
		Load capacity per tyre(kg)										
		LLV										
Speed (km/h)	10	2630	2940	3260	3560	3880	4180	4500	4800	5120	5420	6350
	25	2240	2500	2770	3040	3300	3560	3820	4080	4340	4620	5400
	30	2110	2360	2600	2850	3100	3340	3600	3840	4100	4340	5080
	40			2320	2550	2770	2990	3220	3440	3660	3880	4540
	50					2490	2690	2890	3080	3280	3480	4080

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/55 - 20 IMP 150 A8 TL FLOTATION+

EAN		8714692174865				Section width		515 mm			
Nominal tyre pressure		2,4 bar				Overall diameter		1060 mm			
Tyre construction		Diagonaal				Static loaded radius		475 mm			
Recommended rim width		16.00				Rolling circumference		3160 mm			
						Tread depth		14 mm			
EAN Tube		8714692239113									
		Tyre pressure (bar)									
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	3,00	
		LLV Load capacity per tyre(kg)									HLV
Speed (km/h)	10	2500	2810	3120	3440	3760	4060	4380	4680	5620	
	25	2130	2390	2660	2920	3180	3460	3720	3980	4780	
	30	2000	2250	2500	2750	3000	3260	3500	3760	4500	
	40			2230	2460	2680	2900	3120	3340	4020	
	50					2410	2610	2810	3020	3620	

For the explanation of the symbols and abbreviations, see the inside of the last page.

560/60 - 22.5 IMP 167 A8 TL FLOTATION+

EAN		8714692220364				Section width		565 mm		
Nominal tyre pressure		2,8 bar				Overall diameter		1240 mm		
Tyre construction		Diagonaal				Static loaded radius		550 mm		
Recommended rim width		AG 16.00				Rolling circumference		3700 mm		
						Tread depth		20 mm		
EAN Tube		8714692335044								
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		LLV Load capacity per tyre(kg)								
		HLV								
Speed (km/h)	10	3700	4260	4800	5340	5880	6450	7000	7500	9150
	25	3160	3620	4080	4540	5000	5460	5920	6400	7800
	30	2960	3400	3840	4280	4700	5140	5580	6000	7300
	40			3420	3820	4200	4600	4980	5380	6550
	50					3780	4140	4480	4840	5880

For the explanation of the symbols and abbreviations, see the inside of the last page.

600/55 - 22.5 IMP 168 A8 TL FLOTATION+

EAN		8714692220388				Section width		625 mm		
Nominal tyre pressure		2,8 bar				Overall diameter		1230 mm		
Tyre construction		Diagonaal				Static loaded radius		550 mm		
Recommended rim width		AG 20.00				Rolling circumference		3700 mm		
EAN Tube		8714692335037				Tread depth		20 mm		
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		LLV Load capacity per tyre(kg)								HLV
Speed (km/h)	10	3800	4360	4920	5480	6050	6600	7150	7750	9400
	25	3240	3720	4180	4660	5140	5620	6100	6550	8000
	30	3040	3500	3940	4400	4840	5280	5740	6200	7550
	40			3520	3920	4320	4720	5120	5520	6700
	50					3880	4240	4600	4960	6050

For the explanation of the symbols and abbreviations, see the inside of the last page.

710/45 - 22.5 IMP 171 A8 TL FLOTATION+

EAN		8714692220401				Section width		730 mm		
Nominal tyre pressure		2,8 bar				Overall diameter		1240 mm		
Tyre construction		Diagonaal				Static loaded radius		550 mm		
Recommended rim width		AG 24.00				Rolling circumference		3700 mm		
EAN Tube		8714692335020				Tread depth		20 mm		
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,50
		LLV Load capacity per tyre(kg)								HLV
Speed (km/h)	10	4180	4800	5420	6050	6650	7250	7850	8500	10350
	25	3560	4080	4600	5120	5640	6150	6700	7200	8800
	30	3340	3840	4320	4820	5320	5800	6300	6800	8250
	40			3860	4300	4740	5180	5620	6050	7400
	50					4260	4660	5060	5460	6650

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT — BIAS



IMPLEMENT BIAS



AW

FOR GRASSLAND &
ARABLE MACHINES

FEATURES

Strong, flexible nylon carcass

Longitudinal tread profile

Genuine tread width

BENEFITS

High load capacity at low inflation pressure

Good sideways stability

Reduced damage to the soil



Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
12	7.00 - 12 IMP	6 PR	2,5	4.25	200	705	315	2050	194
	10.0/80 - 12 IMP	116 A8	3,1	7.00	265	725	330	2185	194
15.3	10.0/75 - 15.3 IMP	123 A8	3,9	9.00	270	775	355	2335	195
	10.0/75 - 15.3 IMP	130 A8	5,5	9.00	270	775	355	2335	195
	11.5/80 - 15.3 IMP	131 A8	3,4	9.00	310	850	385	2560	196
	11.5/80 - 15.3 IMP	139 A8	4,8	9.00	310	850	385	2560	196
	12.5/80 - 15.3 IMP	142 A8	4,3	9.00	320	885	405	2660	197
16	13.0/75 - 16 IMP	135 A8	3,0	11	345	905	405	2725	197
430.9	13.5/75 - 430.9 IMP	145 A8	4,0	11	360	960	435	2900	198
17	15.0/55 - 17 IMP	134 A8	2,6	13.00	385	865	390	2580	198
	19.0/45 - 17 IMP	138 A8	2,0	16.00	455	870	400	2620	199
	500/50 - 17 IMP	140 A8	2,0	16.00	500	950	430	2890	199
18	12.5/80 - 18 IMP	142 A8	3,7	11	340	975	450	2985	200
	15.0/70 - 18 IMP	151 A8	4,3	13	395	1000	460	3030	200

For the explanation of the symbols and abbreviations, see the inside of the last page.



7.00 - 12 6 PR IMP TT AW

EAN		8714692082238			Section width		200 mm		
Nominal tyre pressure		2,5 bar			Overall diameter		705 mm		
Tyre construction		Diagonaal			Static loaded radius		315 mm		
Recommended rim width		4.25			Rolling circumference		2050 mm		
Permitted rim width					Tread depth		7 mm		
EAN Tube		8714692285370							
		Tyre pressure (bar)							
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50
		LLV							Load capacity per tyre(kg)
Speed (km/h)	10	560	640	710	780	840	900	960	1170
	25	475	545	605	660	715	765	815	995
	30	450	510	570	625	675	720	765	935
	40			510	555	600	645	685	835
	50				500	540	580	615	750

For the explanation of the symbols and abbreviations, see the inside of the last page.

10.0/80 - 12 IMP 116 A8 TL AW

EAN		8714692262883				Section width		265 mm			
Nominal tyre pressure		3,1 bar				Overall diameter		725 mm			
Tyre construction		Diagonaal				Static loaded radius		330 mm			
Recommended rim width		7.00				Rolling circumference		2185 mm			
Permitted rim width						Tread depth		10 mm			
EAN Tube		8714692238994									
		Tyre pressure (bar)									
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	4,00
		Load capacity per tyre(kg)									
		LLV									
Speed (km/h)	10	910	1040	1160	1260	1370	1470	1560	1650	1730	2050
	25	775	885	980	1070	1160	1250	1320	1400	1470	1740
	30	730	830	925	1010	1090	1170	1250	1320	1390	1640
	40			825	905	975	1050	1110	1180	1240	1470
	50				815	880	940	1000	1060	1110	1320

For the explanation of the symbols and abbreviations, see the inside of the last page.

10.0/75 - 15.3 IMP 123 A8 TL AW

EAN		8714692262876			Section width		270 mm		
Nominal tyre pressure		3,9 bar			Overall diameter		775 mm		
Tyre construction		Diagonaal			Static loaded radius		355 mm		
Recommended rim width		9.00			Rolling circumference		2335 mm		
Permitted rim width					Tread depth		8 mm		
EAN Tube		8714692239007							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,25
		LLV							HLV
		Load capacity per tyre(kg)							
Speed (km/h)	10	970	1230	1460	1660	1850	2020	2190	2560
	25	825	1050	1240	1410	1570	1720	1860	2180
	30	775	985	1170	1330	1480	1620	1750	2050
	40		880	1040	1190	1320	1440	1560	1830
	50			935	1070	1190	1300	1410	1650

For the explanation of the symbols and abbreviations, see the inside of the last page.

10.0/75 - 15.3 IMP 130 A8 TL AW

EAN		8714692309823				Section width		270 mm				
Nominal tyre pressure		5,5 bar				Overall diameter		775 mm				
Tyre construction		Diagonaal				Static loaded radius		355 mm				
Recommended rim width		9.00				Rolling circumference		2335 mm				
Permitted rim width						Tread depth		8 mm				
EAN Tube		8714692239007										
		Tyre pressure (bar)										
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	5,50	7,50
		LLV Load capacity per tyre(kg) HLV										
Speed (km/h)	10	990	1250	1480	1690	1880	2060	2220	2380	2530	2680	3220
	25	840	1060	1260	1440	1600	1750	1890	2020	2150	2280	2730
	30	790	1000	1190	1350	1500	1640	1780	1910	2030	2140	2570
	40			1060	1210	1340	1470	1590	1700	1810	1910	2290
	50				1090	1210	1320	1430	1530	1630	1720	2060

For the explanation of the symbols and abbreviations, see the inside of the last page.

11.5/80 - 15.3 IMP 131 A8 TL AW

EAN				8714692263187				Section width				310 mm							
Nominal tyre pressure				3,4 bar				Overall diameter				850 mm							
Tyre construction				Diagonaal				Static loaded radius				385 mm							
Recommended rim width				9.00				Rolling circumference				2560 mm							
Permitted rim width								Tread depth				10 mm							
EAN Tube				8714692239014															
		Tyre pressure (bar)																	
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	4,75						
		LLV											HLV						
		Load capacity per tyre(kg)																	
Speed (km/h)	10	1330	1510	1680	1840	1990	2130	2270	2400	2530	2650	2760	3300						
	25	1130	1290	1430	1570	1690	1810	1930	2040	2150	2250	2350	2810						
	30	1060	1210	1350	1470	1590	1710	1820	1920	2020	2120	2210	2640						
	40			1200	1320	1420	1520	1620	1710	1800	1890	1970	2360						
	50				1180	1280	1370	1460	1540	1620	1700	1780	2120						

For the explanation of the symbols and abbreviations, see the inside of the last page.

11.5/80 - 15.3 IMP 139 A8 TL AW

EAN		8714692309847				Section width		310 mm			
Nominal tyre pressure		4,8 bar				Overall diameter		850 mm			
Tyre construction		Diagonaal				Static loaded radius		385 mm			
Recommended rim width		9.00				Rolling circumference		2560 mm			
Permitted rim width						Tread depth		10 mm			
EAN Tube		8714692239014									
		Tyre pressure (bar)									
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	6,50
		LLV Load capacity per tyre(kg) HLV									
Speed (km/h)	10	1380	1750	2070	2360	2630	2870	3100	3320	3540	4120
	25	1170	1490	1760	2010	2230	2440	2640	2830	3000	3500
	30	1100	1400	1660	1890	2100	2300	2490	2660	2830	3300
	40			1480	1690	1880	2050	2220	2380	2530	2950
	50				1520	1690	1850	2000	2140	2280	2650

For the explanation of the symbols and abbreviations, see the inside of the last page.

12.5/80 - 15.3 IMP 142 A8 TL AW SPECIAL

EAN				8714692263255		Section width				320 mm	
Nominal tyre pressure				4,3 bar		Overall diameter				885 mm	
Tyre construction				Diagonaal		Static loaded radius				405 mm	
Recommended rim width				9.00		Rolling circumference				2660 mm	
Permitted rim width						Tread depth				11 mm	
EAN Tube				8714692239021							
		Tyre pressure (bar)									
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,25	5,75	
		Load capacity per tyre(kg)									HLV
Speed (km/h)	10	1570	1980	2350	2680	2980	3260	3520	3640	4360	
	25	1330	1690	2000	2270	2530	2770	2990	3100	3700	
	30	1250	1590	1880	2140	2380	2610	2820	2920	3480	
	40		1420	1680	1910	2130	2330	2520	2610	3120	
	50			1510	1720	1910	2090	2260	2350	2800	

For the explanation of the symbols and abbreviations, see the inside of the last page.

13.0/75 - 16 IMP 135 A8 TL AW

EAN				8714692263279			Section width				345 mm	
Nominal tyre pressure				3,0 bar			Overall diameter				905 mm	
Tyre construction				Diagonaal			Static loaded radius				405 mm	
Recommended rim width				11			Rolling circumference				2725 mm	
Permitted rim width							Tread depth				12 mm	
EAN Tube				8714692239045								
		Tyre pressure (bar)										
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	4,00	
		LLV Load capacity per tyre(kg)										HLV
Speed (km/h)	10	1630	1860	2070	2260	2450	2620	2790	2950	3100	3680	
	25	1390	1580	1760	1920	2080	2230	2370	2510	2640	3120	
	30	1300	1490	1650	1810	1960	2100	2230	2360	2480	2940	
	40			1480	1620	1750	1870	1990	2110	2220	2620	
	50				1450	1570	1690	1790	1890	1990	2360	

For the explanation of the symbols and abbreviations, see the inside of the last page.

13.5/75 - 430.9 IMP 145 A8 TL AW SPECIAL

EAN				8714692263286		Section width				360 mm											
Nominal tyre pressure				4,0 bar		Overall diameter				960 mm											
Tyre construction				Diagonaal		Static loaded radius				435 mm											
Recommended rim width				11		Rolling circumference				2900 mm											
Permitted rim width						Tread depth				12 mm											
EAN Tube				8714692239052																	
		Tyre pressure (bar)																			
		1,00		1,50		2,00		2,50		3,00		3,50		4,00		5,50					
		LLV										Load capacity per tyre(kg)									
Speed (km/h)	10	1800	2290	2710	3080	3440	3760	4060	4900												
	25	1530	1940	2300	2620	2920	3200	3460	4160												
	30	1440	1830	2170	2470	2750	3000	3240	3920												
	40		1630	1930	2200	2450	2680	2900	3500												
	50			1740	1980	2210	2410	2610	3140												

For the explanation of the symbols and abbreviations, see the inside of the last page.

15.0/55 - 17 IMP 134 A8 TL AW

EAN		8714692263293			Section width				385 mm
Nominal tyre pressure		2,6 bar			Overall diameter				865 mm
Tyre construction		Diagonaal			Static loaded radius				390 mm
Recommended rim width		13.00			Rolling circumference				2580 mm
Permitted rim width					Tread depth				12 mm
EAN Tube		8714692239069							
		Tyre pressure (bar)							
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50
		LLV							
		Load capacity per tyre(kg)							
		LLV							
Speed (km/h)	10	1650	1880	2090	2290	2480	2650	2820	3440
	25	1400	1600	1780	1950	2100	2250	2400	2920
	30	1320	1500	1670	1830	1980	2120	2260	2750
	40			1490	1640	1770	1890	2010	2450
	50				1470	1590	1710	1810	2210

For the explanation of the symbols and abbreviations, see the inside of the last page.

19.0/45 - 17 IMP 138 A8 TL AW							
EAN		8714692263316			Section width		455 mm
Nominal tyre pressure		2,0 bar			Overall diameter		870 mm
Tyre construction		Diagonaal			Static loaded radius		400 mm
Recommended rim width		16.00			Rolling circumference		2620 mm
Permitted rim width					Tread depth		12 mm
EAN Tube		8714692239076					
		Tyre pressure (bar)					
		1,00	1,25	1,50	1,75	2,00	2,75
		LLV Load capacity per tyre(kg)					HLV
Speed (km/h)	10	2210	2520	2810	3080	3320	4000
	25	1880	2140	2390	2610	2820	3400
	30	1770	2020	2250	2460	2660	3200
	40			2000	2190	2370	2860
	50				1970	2140	2570

For the explanation of the symbols and abbreviations, see the inside of the last page.

500/50 - 17 IMP 140 A8 TL AW								
EAN		8714692263323			Section width		500 mm	
Nominal tyre pressure		2,0 bar			Overall diameter		950 mm	
Tyre construction		Diagonaal			Static loaded radius		430 mm	
Recommended rim width		16.00			Rolling circumference		2890 mm	
Permitted rim width					Tread depth		12 mm	
EAN Tube		8714692239083						
		Tyre pressure (bar)						
		1,00	1,25	1,50	1,75	2,00	2,50	
		LLV	Load capacity per tyre(kg)					HLV
Speed (km/h)	10	2150	2490	2830	3160	3500	4180	
	25	1830	2120	2400	2690	2980	3540	
	30	1720	1990	2260	2530	2800	3340	
	40			2020	2260	2500	2980	
	50					2250	2680	

For the explanation of the symbols and abbreviations, see the inside of the last page.

12.5/80 - 18 IMP 142 A8 TL AW

EAN				8714692263262		Section width				340 mm											
Nominal tyre pressure				3,7 bar		Overall diameter				975 mm											
Tyre construction				Diagonaal		Static loaded radius				450 mm											
Recommended rim width				11		Rolling circumference				2985 mm											
Permitted rim width						Tread depth				11 mm											
EAN Tube				8714692239090																	
		Tyre pressure (bar)																			
		1,00		1,50		2,00		2,50		3,00		3,50		3,75		5,00					
		LLV										Load capacity per tyre(kg)									
Speed (km/h)	10	1760	2230	2640	3000	3340	3660	3820	4520												
	25	1500	1900	2240	2560	2840	3120	3240	3840												
	30	1410	1780	2110	2410	2680	2930	3060	3600												
	40		1590	1890	2150	2390	2620	2720	3220												
	50			1700	1930	2150	2350	2450	2900												

For the explanation of the symbols and abbreviations, see the inside of the last page.

15.0/70 - 18 IMP 151 A8 TL AW

EAN		8714692263309				Section width		395 mm		
Nominal tyre pressure		4,3 bar				Overall diameter		1000 mm		
Tyre construction		Diagonaal				Static loaded radius		460 mm		
Recommended rim width		13				Rolling circumference		3030 mm		
Permitted rim width						Tread depth		13 mm		
EAN Tube		8714692239106								
		Tyre pressure (bar)								
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,25	5,75
		LLV Load capacity per tyre(kg)								HLV
Speed (km/h)	10	2090	2650	3140	3560	3980	4340	4700	4860	5820
	25	1780	2250	2660	3040	3380	3700	4000	4140	4940
	30	1670	2120	2510	2860	3180	3480	3760	3900	4640
	40		1890	2240	2550	2840	3100	3360	3480	4160
	50			2010	2290	2550	2790	3020	3140	3740

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT — BIAS



IMPLEMENT BIAS —



AS+

COMFORT AND TRACTION ASSURED

FEATURES

Sturdy Bias carcass construction

Special tread

Large cleat surface

BENEFITS

Excellent stability and high load capacity

High traction power

Long lifespan

Ø	Tyre size	Service descrip- tion	Service description		 mm	 mm	 mm	 mm	Pag.
12	7.00 - 12 IMP	95 A8	2,5	4.25	190	690	325	2100	204
15.3	10.0/75 - 15.3 IMP	123 A8	3,9	9.00	270	790	365	2420	204
	11.5/80 - 15.3 IMP	135 A8	4,1	9.00	305	890	400	2695	205
17	15.0/55 - 17 IMP	134 A8	2,6	13.00	370	890	400	2680	205

For the explanation of the symbols and abbreviations, see the inside of the last page.



7.00 - 12 6 PR IMP 95 A8 TL AS+										
EAN				8714692909504		Section width				190 mm
Nominal tyre pressure				2,5 bar		Overall diameter				690 mm
Tyre construction				Diagonaal		Static loaded radius				325 mm
Recommended rim width				4.25		Rolling circumference				2100 mm
Permitted rim width						Tread depth				17 mm
EAN Tube				8714692238987						
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50	
		LLV							Load capacity per tyre(kg)	HLV
Speed (km/h)	10	560	640	710	780	840	900	960	1170	
	25	475	545	605	660	715	765	815	995	
	30	450	510	570	625	675	720	765	935	
	40			510	555	600	645	685	835	
	50				500	540	580	615	750	

For the explanation of the symbols and abbreviations, see the inside of the last page.

10.0/75 - 15.3 10 PR IMP 123 A8 TL AS+										
EAN				8714692909511		Section width				270 mm
Nominal tyre pressure				3,9 bar		Overall diameter				790 mm
Tyre construction				Diagonaal		Static loaded radius				365 mm
Recommended rim width				9.00		Rolling circumference				2420 mm
Permitted rim width						Tread depth				22 mm
EAN Tube				8714692239007						
		Tyre pressure (bar)								
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,25	
		LLV Load capacity per tyre(kg)								HLV
Speed (km/h)	10	970	1230	1460	1660	1850	2020	2190	2560	
	25	825	1050	1240	1410	1570	1720	1860	2180	
	30	775	985	1170	1330	1480	1620	1750	2050	
	40		880	1040	1190	1320	1440	1560	1830	
	50			935	1070	1190	1300	1410	1650	

For the explanation of the symbols and abbreviations, see the inside of the last page.

11.5/80 - 15.3 12 PR IMP 135 A8 TL AS+

EAN		8714692909528			Section width				305 mm
Nominal tyre pressure		4,1 bar			Overall diameter				890 mm
Tyre construction		Diagonaal			Static loaded radius				400 mm
Recommended rim width		9.00			Rolling circumference				2695 mm
Permitted rim width					Tread depth				22 mm
EAN Tube		8714692239014							
		Tyre pressure (bar)							
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	5,50
		LLV							
Speed (km/h)	10	1350	1710	2030	2310	2570	2810	3040	3660
	25	1150	1460	1720	1960	2180	2390	2580	3120
	30	1080	1370	1620	1850	2050	2250	2430	2930
	40		1220	1450	1650	1830	2010	2170	2620
	50			1300	1480	1650	1810	1950	2350

For the explanation of the symbols and abbreviations, see the inside of the last page.

15.0/55-17 10 PR IMP 134 A8 TL AS+

EAN		8714692909535				Section width				370 mm
Nominal tyre pressure		2,6 bar				Overall diameter				890 mm
Tyre construction		Diagonaal				Static loaded radius				400 mm
Recommended rim width		13.00				Rolling circumference				2680 mm
Permitted rim width						Tread depth				22 mm
EAN Tube		8714692239069								
		Tyre pressure (bar)								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	3,50	
		LLV								HLV
Speed (km/h)	10	1650	1880	2090	2290	2480	2650	2820	3440	
	25	1400	1600	1780	1950	2100	2250	2400	2920	
	30	1320	1500	1670	1830	1980	2120	2260	2750	
	40			1490	1640	1770	1890	2010	2450	
	50				1470	1590	1710	1810	2210	

For the explanation of the symbols and abbreviations, see the inside of the last page.

IMPLEMENT BIAS



V61

FOR PROFESSIONAL
CULTIVATION MACHINERY

FEATURES

- Robust tread
- Strong nylon carcass
- Tubeless

BENEFITS

- Highly resistant to punctures
- Long lifespan
- Easy to fit

Ø	Tyre size	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
14.5	200/60 - 14.5 IMP	106 A8	5,0	AG 6.75	210	615	295	1880	207
	250/65 - 14.5 IMP	121 A8	3,6	AG 8.00	245	680	320	2060	207

For the explanation of the symbols and abbreviations, see the inside of the last page.

200/60 - 14.5 IMP 106 A8 TL V61

EAN	8714692105890	Section width	210 mm
Nominal tyre pressure	5,0 bar	Overall diameter	615 mm
Tyre construction	Diagonaal	Static loaded radius	295 mm
Recommended rim width	AG 6.75	Rolling circumference	1880 mm
		Tread depth	9 mm
EAN Tube	8714692238970		

		Tyre pressure (bar)									
		1,00	1,50	2,00	2,50	3,00	3,50	4,00	4,50	5,00	6,00
		Load capacity per tyre(kg)									
		LLV									HLV
Speed (km/h)	10	385	510	630	750	870	990	1110	1230	1350	1600
	25	330	430	535	635	740	845	945	1050	1150	1360
	30	310	405	505	600	695	795	890	985	1080	1280
	40		365	450	535	620	710	795	880	970	1140
	50			405	480	560	640	715	795	870	1030

For the explanation of the symbols and abbreviations, see the inside of the last page.

250/65 - 14.5 IMP 121 A8 TL V61

EAN	8714692220449	Section width	245 mm
Nominal tyre pressure	3,6 bar	Overall diameter	680 mm
Tyre construction	Diagonaal	Static loaded radius	320 mm
Recommended rim width	AG 8.00	Rolling circumference	2060 mm
		Tread depth	9 mm
EAN Tube	8714692238970		

		Tyre pressure (bar)									
		1,00	1,40	1,80	2,20	2,60	3,00	3,40	3,60	4,40	
		Load capacity per tyre(kg)									
		LLV									HLV
Speed (km/h)	10	710	915	1120	1320	1520	1730	1930	2030	2440	
	25	605	775	950	1120	1290	1470	1640	1730	2070	
	30	570	730	895	1060	1220	1380	1540	1620	1950	
	40		650	795	940	1090	1230	1380	1450	1740	
	50			720	850	980	1110	1240	1300	1570	

For the explanation of the symbols and abbreviations, see the inside of the last page.



SMALL TYRES

AGRICULTURAL

Pag.

V50	210
V60	211
V61	211
V64	212
V64+	212
V67	212

LAWN- AND GROUNDCARE

Greentrax	220
V71	221
V88	221

UTILITY

V20	226
V25	226
V40	227
V52	227
V76	228

FAST TRAILER

V47	234
V48	234
V49	235
V54	235
V71	236



SMALL TYRES - AGRICULTURAL



V50

DESIGNED AS FURROW
WHEEL ON PLOUGHS

FEATURES

- Smooth tread
- Available in high ply rating
- Smooth sidewall

BENEFITS

- Tyre never becomes clogged
- Suitable for heavy applications
- Shakes off clinging soil



— SMALL TYRES AGRICULTURAL



V60

THE TYRE FOR GRASSLAND
& HORTICULTURE

FEATURES

Wide lateral grooves
Rounded contour
Sturdy carcass

BENEFITS

Good sideways stability
Prevents damage to the turf
Long lifespan



V61

FOR PROFESSIONAL
CULTIVATION MACHINERY

FEATURES

Robust tread
Strong nylon carcass
Tubeless

BENEFITS

Highly resistant to punctures
Long lifespan
Easy to fit



SMALL TYRES - AGRICULTURAL



V64/V64+

THE STANDARD FOR
EFFICIENT HAY MAKING

FEATURES

Extra thick tread
Rounded shoulders
Wide tread & flat contour

BENEFITS

Puncture resistant and long lifespan
Prevents damage to the turf
Minimal rutting



V67

THE IDEAL TRACTION TYRE FOR
MARKET GARDENING

FEATURES

Traction tread with narrow cleats
Special shape of the cleats
Drive/non drive load indication

BENEFITS

Excellent grip
Perfect self-cleaning
Load capacity for every application

- SMALL TYRES AGRICULTURAL

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	Pag.
V50	5.00 - 8	10	66 A6	6,0	3.00D	130	455	214
V50	6.00 - 9	10	94 A6	5,0	4.00 E	165	445	214
V60	3.00 - 4	4	30 A6	3,5	2.10	90	275	214
V60	4.00 - 4	4	43 A6	2,8	2.10	100	315	214
V60	3.50 - 6	4	45 A6	3,0	2.50A	100	355	214
V60	3.50 - 8	4	52 A6	3,0	2.50A	100	395	215
V60	4.00 - 8	4	57 A6	2,8	2.50A	105	425	215
V61	15x 6.00 - 6	4	61 A6	2,5	4.50A	160	380	215
V61	170/60 - 8	6	71 A6	3,0	5.50 A	170	425	215
V61	18x 8.50 - 8	4	77 A6	2,0	7.00 I	210	465	215
V61	18x 8.50 - 8	6	85 A6	3,0	7.00 I	210	465	216
V64	3.50 - 6	4	45 A6	3,0	2.50A	100	355	216
V64+	160/65 - 6		60 A8	2,4	4.50A	160	365	216
V64+	160/65 - 6		66 A8	3,2	4.50A	160	365	216
V64	3.50 - 8	4	52 A6	3,0	2.50A	100	395	216
V64+	170/60 - 8		65 A8	2,4	5.50 A	170	410	217
V64+	170/60 - 8		71 A8	3,2	5.50 A	170	410	217
V64+	210/60 - 8		83 A8	3,2	7.00 I	215	455	217
V67	3.00 - 4	4	30 A6	3,5	2.10	90	275	217
V67	3.50 - 6	4	45 A6	3,0	2.50A	100	355	218
V67	3.50 - 8	4	52 A6	3,0	2.50A	100	395	218
V67	4.00 - 8	4	57 A6	2,8	2.50A	105	425	218
V67	4.00 - 12	4	66 A6	2,75	3.00 D	110	515	218

For the explanation of the symbols and abbreviations, see the inside of the last page.



SMALL TYRES - AGRICULTURAL

5.00 - 8 10 PR 66 A6 TT V50

EAN	8714692081989	Section width	130 mm
Nominal tyre pressure	6,0 bar	Overall diameter	455 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	390 kg
Recommended rim width	3.00D	Load capacity at 30 km/h	300 kg
Permitted rim width	3.50D	Load capacity at 40 km/h	270 kg
		EAN Tube	8714692285288

6.00 - 9 10 PR 94 A6 TT V50

EAN	8714692082177	Section width	165 mm
Nominal tyre pressure	5,0 bar	Overall diameter	540 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	865 kg
Recommended rim width	4.00E	Load capacity at 30 km/h	670 kg
Permitted rim width	3.50D	Load capacity at 40 km/h	605 kg
		EAN Tube	8714692285325

3.00 - 4 4 PR 30 A6 TT V60

EAN	8714692081675	Section width	90 mm
Nominal tyre pressure	3,5 bar	Overall diameter	275 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	135 kg
Recommended rim width	2.10	Load capacity at 30 km/h	105 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	95 kg
		EAN Tube	8714692285202

4.00 - 4 4 PR 43 A6 TT V60

EAN	8714692082047	Section width	100 mm
Nominal tyre pressure	2,8 bar	Overall diameter	315 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	200 kg
Recommended rim width	2.10	Load capacity at 30 km/h	155 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	140 kg
		EAN Tube	8714692285219

3.50 - 6 4 PR 45 A6 TT V60

EAN	8714692081705	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	150 kg
		EAN Tube	8714692285226

- SMALL TYRES AGRICULTURAL

3.50 - 8 4 PR 52 A6 TT V60

EAN	8714692081804	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h	180 kg
		EAN Tube	8714692285257

4.00 - 8 4 PR 57 A6 TT V60

EAN	8714692081767	Section width	105 mm
Nominal tyre pressure	2,8 bar	Overall diameter	425 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	230 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	210 kg
		EAN Tube	8714692285264

15x6.00 - 6 4 PR 61 A6 TT V61

EAN	8714692082139	Section width	160 mm
Nominal tyre pressure	2,5	Overall diameter	380 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	340 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	260 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h	230 kg
		EAN Tube	8714692285240

170/60 - 8 6 PR 71 A6 TT V61

EAN	8714692082160	Section width	170 mm
Nominal tyre pressure	3,0 bar	Overall diameter	425 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	445 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	345 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	270 kg
Alternative tyre size	16 x 6.50-8	EAN Tube	8714692285301

18x8.50 - 8 4 PR 77 A6 TT V61

EAN	8714692082443	Section width	210 mm
Nominal tyre pressure	2,0 bar	Overall diameter	465 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	530 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	410 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	370 kg
		EAN Tube	8714692285318



SMALL TYRES - AGRICULTURAL

18x8.50 - 8 6 PR 85 A6 TL V61

EAN	8714692082351	Section width	210 mm
Nominal tyre pressure	3,0 bar	Overall diameter	465 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	670 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	520 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	465 kg
		EAN Tube	8714692285318

3.50 - 6 4 PR 45 A6 TT V64

EAN	8714692081620	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	150 kg
		EAN Tube	8714692285226

160/65 - 6 60 A8 TT V64+

EAN	8714692256424	Section width	160 mm
Nominal tyre pressure	2,4 bar	Overall diameter	365 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	350 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	280 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	250 kg
Alternative tyre size	16 x 6.00-6	EAN Tube	8714692285240

160/65 - 6 66 A8 TT V64+

EAN	8714692244490	Section width	160 mm
Nominal tyre pressure	3,2 bar	Overall diameter	365 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	420 kg
Recommended rim width	4.50A	Load capacity at 30 km/h	335 kg
Permitted rim width	2.50C	Load capacity at 40 km/h	300 kg
Alternative tyre size	16 x 6.00-6	EAN Tube	8714692285240

3.50 - 8 4 PR 52 A6 TT V64

EAN	8714692081811	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h	180 kg
		EAN Tube	8714692285257

- SMALL TYRES AGRICULTURAL

170/60 - 8 65 A8 TT V64+

EAN	8714692256462	Section width	170 mm
Nominal tyre pressure	2,4 bar	Overall diameter	410 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	405 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	325 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	290 kg
Alternative tyre size	16 x 6.50-8	EAN Tube	8714692285301

170/60 - 8 71 A8 TT V64+

EAN	8714692256462	Section width	170 mm
Nominal tyre pressure	3,2 bar	Overall diameter	410 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	485 kg
Recommended rim width	5.50A	Load capacity at 30 km/h	385 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	345 kg
Alternative tyre size	16 x 6.50-8	EAN Tube	8714692285301

210/60 - 8 83 A8 TT V64+

EAN	8714692244513	Section width	215 mm
Nominal tyre pressure	3,2 bar	Overall diameter	455 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	680 kg
Recommended rim width	7.00I	Load capacity at 30 km/h	545 kg
Permitted rim width	5.375I	Load capacity at 40 km/h	485 kg
Alternative tyre size	18 x 8.50-8	EAN Tube	8714692285318

3.00 - 4 4 PR 30 A6 TT V67

EAN	8714692081682	Section width	90 mm
Nominal tyre pressure	3,5 bar	Overall diameter	275 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h**	135 kg
Recommended rim width	2.10	Load capacity at 30 km/h**	105 kg
Permitted rim width	2.50C	Load capacity at 40 km/h**	95 kg
		EAN Tube	8714692285202

3.50 - 6 4 PR 45 A6 TT V67

EAN	8714692081712	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	355 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h**	215 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	165 kg
Permitted rim width	2.50C	Load capacity at 40 km/h**	150 kg
		EAN Tube	8714692285226



SMALL TYRES - AGRICULTURAL

3.50 - 8 4 PR 52 A6 TT V67

EAN	8714692081828	Section width	100 mm
Nominal tyre pressure	3,0 bar	Overall diameter	395 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h**	260 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	200 kg
Permitted rim width	2.50 C	Load capacity at 40 km/h**	180 kg
		EAN Tube	8714692285257

4.00 - 8 4 PR 57 A6 TT V67

EAN	8714692081842	Section width	105 mm
Nominal tyre pressure	2,8 bar	Overall diameter	425 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h**	300 kg
Recommended rim width	2.50A	Load capacity at 30 km/h**	230 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h**	210 kg
		EAN Tube	8714692285264

4.00 - 12 4 PR 66 A6 TT V67

EAN	8714692082122	Section width	110 mm
Nominal tyre pressure	2,8 bar	Overall diameter	515 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h**	390 kg
Recommended rim width	3.00D	Load capacity at 30 km/h**	300 kg
Permitted rim width	2.50C, 3.00D	Load capacity at 40 km/h**	270 kg
		EAN Tube	8714692285356

– SMALL TYRES AGRICULTURAL



LAWN- AND GROUNDS CARE



GREENTRAX

CUT THE COSTS, KEEP IT GREEN

FEATURES

High rubber to air ratio in the tread

Stable central section

Raised cleats in the shoulder area

BENEFITS

Wear resistant and durable

Stable on course and comfortable to drive

High traction, minimal wear



LAWN- AND GROUNDSCARE



V71

FOR SMALL MACHINES
AND TOOLS

FEATURES

- Special lawn tread
- Flexible carcass construction
- Relatively large contact surface

BENEFITS

- Lawn friendly
- Comfortable ride
- Minimal rutting



V88

KIND TO THE LAWN WHILE
PROVIDING SUFFICIENT TRACTION

FEATURES

- Large and flat contact area
- Rounded shoulders
- Flexible sidewall construction

BENEFITS

- Minimal rutting
- Avoids damage to the grass
- Excellent shock absorption



LAWN- AND GROUNDCARE

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	 mm	 mm	Pag.
Greentrax	160/65 - 6 IMP (15x6.00-6)		60 A8	2,4	4.50 A	155	365	160*	1.085*	223
Greentrax	170/60 - 8 IMP (16x6.50-8)		65 A8	2,4	5.50 A	170	410	185*	1.225*	223
Greentrax	210/60 - 8 IMP (18x8.50-8)		76 A8	2,4	7.00 I	215	455	205*	1.365*	223
Greentrax	250/50 - 8 IMP (18x9.50-8)		90 A8	2,4	7.00 I	240	455	205*	1.360*	223
Greentrax	250/60 - 8 IMP (20x10.00-8)		96 A8	2,4	7.00 I	245	505	225*	1.565*	223
Greentrax	210/60 - 10 IMP (20x8.00-10)		87 A8	2,4	6.00 I	205	505	225*	1.510*	224
Greentrax	250/50 - 10 IMP (20x10.00-10)		97 A8	2,4	8.50 I	255	505	230*	1.555*	224
Greentrax	270/50 - 12 IMP (23x10.50-12)		103 A8	2,4	8.50 I	265	580	265*	1.740*	224
Greentrax	320/45 - 12 IMP (24x13.00-12)		110 A8	2,4	10.50 I	320	600	275*	1.825*	224
Greentrax	320/55 - 12 IMP (26x12.00-12)		116 A8	2,4	10.50 I	320	655	300*	1.965*	224
V71	170/60 - 8 (16x6.50-8)	4		2,0	5.50 A	175	430			225
V88	18x 8.50 - 8	6		3,0	7.00 I	210	465			225

For the explanation of the symbols and abbreviations, see the inside of the last page.

* = Calculated values

LAWN- AND GROUNDCARE

160/65 - 6 IMP 60 A8 / 48 A8 TL GREENTRAX

EAN	8714692274114	Section width	155 mm
Nominal tyre pressure	2,4 bar	Overall diameter	365 mm
Tyre construction	Diagonaal	Static loaded radius	160* mm
Recommended rim width	4.50A	Rolling circumference	1.085* mm
		Load capacity at 10 km/h**	350 kg
Alternative tyre size	15x6.00 - 6	Load capacity at 30 km/h**	280 kg
EAN Tube	8714692238857	Load capacity at 40 km/h**	250 kg

170/60 - 8 IMP 65 A8 / 53 A8 TL GREENTRAX

EAN	8714692274121	Section width	170 mm
Nominal tyre pressure	2,4 bar	Overall diameter	410 mm
Tyre construction	Diagonaal	Static loaded radius	185* mm
Recommended rim width	5.50A	Rolling circumference	1225* mm
Permitted rim width	5.375I	Load capacity at 10 km/h**	405 kg
Alternative tyre size	16x6.50 - 8	Load capacity at 30 km/h**	325 kg
EAN Tube	8714692238918	Load capacity at 40 km/h**	290 kg

210/60 - 8 IMP 76 A8 / 64 A8 TL GREENTRAX

EAN	8714692274138	Section width	215 mm
Nominal tyre pressure	2,4 bar	Overall diameter	455 mm
Tyre construction	Diagonaal	Static loaded radius	205* mm
Recommended rim width	7.00I	Rolling circumference	1365* mm
		Load capacity at 10 km/h**	560 kg
Alternative tyre size	18x8.50 - 8	Load capacity at 30 km/h**	450 kg
EAN Tube	8714692238925	Load capacity at 40 km/h**	400 kg

250/50 - 8 IMP 90 A8 / 78 A8 TL GREENTRAX

EAN	8714692274145	Section width	240 mm
Nominal tyre pressure	2,4 bar	Overall diameter	455 mm
Tyre construction	Diagonaal	Static loaded radius	205* mm
Recommended rim width	7.00I	Rolling circumference	1360* mm
		Load capacity at 10 km/h**	840 kg
Alternative tyre size	18x9.50 - 8	Load capacity at 30 km/h**	670 kg
		Load capacity at 40 km/h**	600 kg

250/60 - 8 IMP 96 A8 / 84 A8 TL GREENTRAX

EAN	8714692274152	Section width	245 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Diagonaal	Static loaded radius	225* mm
Recommended rim width	7.00I	Rolling circumference	1565* mm
Permitted rim width	8.00I	Load capacity at 10 km/h**	995 kg
Alternative tyre size	20x10.00 - 8	Load capacity at 30 km/h**	795 kg
		Load capacity at 40 km/h**	710 kg



LAWN- AND GROUNDSCARE

210/60 - 10 IMP 87 A8 / 75 A8 TL GREENTRAX

EAN	8714692274169	Section width	205 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Diagonaal	Static loaded radius	225* mm
Recommended rim width	6.00I	Rolling circumference	1510* mm
		Load capacity at 10 km/h**	765 kg
Alternative tyre size	20x8.00 - 10	Load capacity at 30 km/h**	610 kg
		Load capacity at 40 km/h**	545 kg

250/50 - 10 IMP 97 A8 / 85 A8 TL GREENTRAX

EAN	8714692274176	Section width	255 mm
Nominal tyre pressure	2,4 bar	Overall diameter	505 mm
Tyre construction	Diagonaal	Static loaded radius	230* mm
Recommended rim width	8.50I	Rolling circumference	1555* mm
Permitted rim width	7.00I, 8.00I, 8.25	Load capacity at 10 km/h**	1020 kg
Alternative tyre size	20x10.00 - 10	Load capacity at 30 km/h**	820 kg
		Load capacity at 40 km/h**	730 kg

270/50 - 12 IMP 103 A8 / 91 A8 TL GREENTRAX

EAN	8714692274183	Section width	265 mm
Nominal tyre pressure	2,4 bar	Overall diameter	580 mm
Tyre construction	Diagonaal	Static loaded radius	265* mm
Recommended rim width	8.50I	Rolling circumference	1740* mm
Permitted rim width	7.00I, 7JA, 8.50JA	Load capacity at 10 km/h**	1225 kg
Alternative tyre size	23x10.50 - 12	Load capacity at 30 km/h**	980 kg
		Load capacity at 40 km/h**	875 kg

320/45 - 12 IMP 110 A8 / 98 A8 TL GREENTRAX

EAN	8714692292224	Section width	320 mm
Nominal tyre pressure	2,4 bar	Overall diameter	600 mm
Tyre construction	Diagonaal	Static loaded radius	275* mm
Recommended rim width	10.50I	Rolling circumference	1825* mm
Permitted rim width	9.50JA, 10.50JA	Load capacity at 10 km/h**	1485 kg
Alternative tyre size	24x13.00 - 12	Load capacity at 30 km/h**	1185 kg
		Load capacity at 40 km/h**	1060 kg

320/55 - 12 IMP 116 A8 / 104 A8 TL GREENTRAX

EAN	8714692274190	Section width	320 mm
Nominal tyre pressure	2,4 bar	Overall diameter	655 mm
Tyre construction	Diagonaal	Static loaded radius	300* mm
Recommended rim width	10.50I	Rolling circumference	1965* mm
Permitted rim width	8.50I, 8.50JA, 9.50JA, 10.50JA	Load capacity at 10 km/h**	1750 kg
		Load capacity at 30 km/h**	1400 kg
Alternative tyre size	26x12.00 - 12	Load capacity at 40 km/h**	1250 kg

LAWN- AND GROUNDSCARE

170/60 - 8 4 PR TT V71

EAN	8714692082115	Section width	175 mm
Nominal tyre pressure	2,0 bar	Overall diameter	430 mm
Tyre construction	Diagonaal	Static loaded radius	N/A mm
Recommended rim width	5.50A	Rolling circumference	N/A mm
Permitted rim width	5.375I	Load capacity at 10 km/h**	345 kg
Alternative tyre size	16x6.50 - 8	Load capacity at 30 km/h**	265 kg
EAN Tube	8714692285301	Load capacity at 40 km/h**	240 kg

18x8.50 - 8 6 PR TL V88

EAN	8714692082436	Section width	210 mm
Nominal tyre pressure	3,0 bar	Overall diameter	465 mm
Tyre construction	Diagonaal	Static loaded radius	N/A mm
Recommended rim width	7.00I	Rolling circumference	N/A mm
		Load capacity at 10 km/h**	670 kg
		Load capacity at 30 km/h**	515 kg
EAN Tube	8714692285318	Load capacity at 40 km/h**	465 kg



SMALL TYRES UTILITY —



V20

STRONG, TRIED AND TESTED

FEATURES

Strong carcass
Rounded contour
Tried and tested construction

BENEFITS

Long lifespan
Excellent manoeuvrability
Good price/quality ratio



V25

**FOR PEDAL-CARTS AND
HEAVY-DUTY WHEELBARROWS**

FEATURES

Sturdy sidewall construction
Strong carcass
Robust tread

BENEFITS

High resistance to punctures
High endurance
Good grip



V40

HIGH LOAD CAPACITY FOR
INTERNAL TRANSPORT

FEATURES

All-round tread pattern
Centre-contact zone
Open shoulder tread

BENEFITS

Suits a variety of applications
Low rolling resistance
Good stability



V52

FOR MOBILE HOMES AND
AGRICULTURAL EQUIPMENT

FEATURES

Strong carcass
Flat contour
Optimised tread profile

BENEFITS

Suitable for heavy loads
Optimal pressure distribution in contact area
Low rolling resistance



SMALL TYRES UTILITY —



V76

MANOEUVRABILITY FOR
INTERNAL TRANSPORT

FEATURES

“Cube” profile

Flexible carcass

Available in grey upon request

BENEFITS

Optimised for internal transport equipment

Absorbs excessive vibrations

For warehouses, hospitals, supermarkets, etc.

SMALL TYRES — UTILITY

Profil	Tyre size	PR	Nominal inflation pressure (bar)		Permitted rim width	 mm	 mm	Pag.
V20	200 x 50	2	2,5	200 x 50		50	195	230
V20	260 x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	230
V20	4.00 - 4	4	5,0	2.50 C x 4	2.50 C - 4	110	305	230
V20	3.50 - 6	4	4,5	2.50 A x 6	2.50 A - 6	95	335	230
V20	2.25 - 8	4	3,5	1.75 x 8		70	335	230
V20	4.00 - 8	4	4,0	2.50 x 8	2.50 A - 8	105	415	230
V25	4.00 - 8	4	4,0	2.50 x 8	2.50 A - 8	105	415	231
V40	4.00 - 8	6	5,0	3.00 D - 8	2.50 C - 8	115	430	231
V40	4.00 - 8	8	6,5	3.00 D - 8	2.50 C - 8	115	430	231
V52	5.00 - 8	6	6,3	3.00 D - 8	3.50 D - 8	135	470	231
V52	5.00 - 8	8	7,0	3.00 D - 8	3.50 D - 8	135	470	231
V52	6.00 - 9	10	7,0	4.00 E - 9		165	550	232
V76	260 x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	232
V76	260 x 85	4	5,0	2.10 x 4	2.10 - 4	90	270	232
V76	260 x 85	6	7,0	2.10 - 4		90	270	232
V76	4.10 / 3.50 - 4	4	5,0	2.10 x 4	2.50 C x 4, 2.50 C - 4	95	280	232
V76	4.00 - 4	4	2,8	2.50 C x 4	2.50 C - 4	110	305	232
V76	4.00 - 4	6	7,0	2.50 C - 4		110	305	233
V76	4.80 / 4.00 - 8	4	4,5	2.50 A x 8	2.50 C - 8	115	435	233

For the explanation of the symbols and abbreviations, see the inside of the last page.



SMALL TYRES UTILITY —

200x50 2 PR TT V20

EAN	8714692081965	Section width	50 mm
Nominal tyre pressure	2,5 bar	Overall diameter	195 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	75 kg
Recommended rim width	200 x 50	Load capacity at 20 km/h	65 kg
		EAN Tube	8714692304644

260x85 4 PR TT V20

EAN	8714692081644	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	8714692285202

4.00 - 4 4 PR TT V20

EAN	8714692081873	Section width	110 mm
Nominal tyre pressure	5,0 bar	Overall diameter	305 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50C x 4	Load capacity at 20 km/h	265 kg
Permitted rim width	2.50 C - 4	EAN Tube	8714692285219

3.50 - 6 4 PR TT V20

EAN	8714692081699	Section width	95 mm
Nominal tyre pressure	4,5 bar	Overall diameter	335 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	280 kg
Recommended rim width	2.50A x 6	Load capacity at 20 km/h	250 kg
Permitted rim width	2.50A - 6	EAN Tube	8714692285226

2.25 - 8 4 PR TT V20

EAN	8714692081835	Section width	70 mm
Nominal tyre pressure	3,5 bar	Overall diameter	335 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	150 kg
Recommended rim width	1.75 x 8	Load capacity at 20 km/h	135 kg
		EAN Tube	8714692034855

4.00 - 8 4 PR TT V20

EAN	8714692081736	Section width	105 mm
Nominal tyre pressure	4,0 bar	Overall diameter	415 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	400 kg
Recommended rim width	2.50 x 8	Load capacity at 20 km/h	355 kg
Permitted rim width	2.50A - 8	EAN Tube	8714692285264

SMALL TYRES — UTILITY

4.00 - 8 4 PR TT V25

EAN	8714692081750	Section width	105 mm
Nominal tyre pressure	4,0 bar	Overall diameter	415 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	400 kg
Recommended rim width	2.50 x 8	Load capacity at 20 km/h	355 kg
Permitted rim width	2.50A - 8	EAN Tube	8714692285264

4.00 - 8 6 PR TT V40

EAN	8714692081910	Section width	115 mm
Nominal tyre pressure	5,0 bar	Overall diameter	430 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	600 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	530 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285271

4.00 - 8 8 PR TT V40

EAN	8714692081927	Section width	115 mm
Nominal tyre pressure	6,5 bar	Overall diameter	430 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	710 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	630 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285271

5.00 - 8 6 PR TT V52

EAN	8714692081996	Section width	135 mm
Nominal tyre pressure	6,3 bar	Overall diameter	470 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	820 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	725 kg
Permitted rim width	3.50D - 8	EAN Tube	8714692285295

5.00 - 8 8 PR TT V52

EAN	8714692082009	Section width	135 mm
Nominal tyre pressure	7,0 bar	Overall diameter	470 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	925 kg
Recommended rim width	3.00D - 8	Load capacity at 20 km/h	820 kg
Permitted rim width	3.50D - 8	EAN Tube	8714692285295

6.00 - 9 10 PR TT V52

EAN	8714692082191	Section width	165 mm
Nominal tyre pressure	7,0 bar	Overall diameter	550 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	1300 kg
Recommended rim width	4.00E - 9	Load capacity at 20 km/h	1150 kg
		EAN Tube	8714692285332



SMALL TYRES UTILITY —

260x85 4 PR TT V76

EAN	8714692081668	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	8714692285202

260x85 4 PR TL V76

EAN	8714692082450	Section width	90 mm
Nominal tyre pressure	5,0 bar	Overall diameter	270 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	210 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	185 kg
Permitted rim width	2.10 - 4	EAN Tube	0

260x85 6 PR TT V76

EAN	8714692081903	Section width	90 mm
Nominal tyre pressure	7,0 bar	Overall diameter	270 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	250 kg
Recommended rim width	2.10 - 4	Load capacity at 20 km/h	225 kg
		EAN Tube	8714692285202

4.10/3.50 - 4 4 PR TT V76

EAN	8714692081897	Section width	95 mm
Nominal tyre pressure	5,0 bar	Overall diameter	280 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	260 kg
Recommended rim width	2.10 x 4	Load capacity at 20 km/h	230 kg
Permitted rim width	2.50C x 4, 2.50C - 4	EAN Tube	8714692285219

4.00 - 4 4 PR TT V76

EAN	8714692081880	Section width	110 mm
Nominal tyre pressure	5,0 bar	Overall diameter	305 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	300 kg
Recommended rim width	2.50C x 4	Load capacity at 20 km/h	265 kg
Permitted rim width	2.50C - 4	EAN Tube	8714692285219

4.00 - 4 6 PR TT V76

EAN	8714692105876	Section width	110 mm
Nominal tyre pressure	7,0 bar	Overall diameter	305 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	350 kg
Recommended rim width	2.50C - 4	Load capacity at 20 km/h	310 kg
		EAN Tube	8714692285219

SMALL TYRES — UTILITY

4.10/3.50 - 6 4 PR TT V76

EAN	8714692081729	Section width	100 mm
Nominal tyre pressure	4,5 bar	Overall diameter	345 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	280 kg
Recommended rim width	2.50A x 6	Load capacity at 20 km/h	250 kg
Permitted rim width	2.50A - 6	EAN Tube	8714692285219

4.80/4.00 - 8 4 PR TT V76

EAN	8714692081774	Section width	115 mm
Nominal tyre pressure	4,5 bar	Overall diameter	435 mm
Tyre construction	Diagonaal	Load capacity at 10 km/h	440 kg
Recommended rim width	2.50A x 8	Load capacity at 20 km/h	390 kg
Permitted rim width	2.50C - 8	EAN Tube	8714692285264



SMALL TYRES FAST TRAILER



V47

HIGH COMFORT FOR
SMALL TRAILERS

FEATURES

Speed index "M"

Tried and tested construction

Strong carcass

BENEFITS

Capable of speeds of up to 130 km/h

Peak loads handled with ease

Reliable and safe



V48

EACH TRAILER DESERVES
THE BEST TYRE

FEATURES

Optimised tread contour

Unique tread design

Tread wear indicator

BENEFITS

Follows the towing vehicle perfectly

Good aquaplaning resistance

Indicates minimum tread depth

SMALL TYRES FAST TRAILER



V49

TO ENSURE A COMFORTABLE
ROLLING PERFORMANCE

FEATURES

Wide profile grooves
Flat contour
Strong carcass

BENEFITS

High aquaplaning resistance
Good stability
Long lifespan



V54

THE HEAVY-DUTY
HIGH-SPEED TYRE

FEATURES

Durable carcass construction
Thick tread
Unique shoulder tread

BENEFITS

Long, effective lifespan
Greater resistance to punctures
Good track stability



SMALL TYRES FAST TRAILER



V71

COMBINING SPEED WITH
STABILITY & COMFORT

FEATURES

Sophisticated tread

Tubeless specification

Relatively large contact surface

BENEFITS

Stability & grip on grass or sand

Easy to fit

Comfortable ride

SMALL TYRES FAST TRAILER

Profil	Tyre size	PR	Service description	Nominal inflation pressure (bar)		 mm	 mm	Pag.
V47	3.50 - 8	4	46 M	2,5	2.50A x 8	99	389	238
V47	4.00 - 8	4	63 M	3,5	2.50A x 8	114	422	238
V47	4.00 - 8	6	70 M	4,3	2.50A x 8	114	422	238
V47	5.00 - 8	6	78 M	5,0	3.00D x 8	145	478	238
V47	5.00 - 10	4	74 M	3,5	3.50B x 10	146	525	238
V47	5.00 - 10	6	80 M	4,0	3.50B x 10	146	525	238
V47	5.00 - 10	8	84 M	5,0	3.50B x 10	146	525	239
V48	18.5x 8.50 - 8	6	78 M	3,6	7.00 x 8	220	475	239
V48	18x 8.0 - 10	6	98 M	6,0	6.00 x 10	188	462	239
V48	20.5x 8.0 - 10	10	96 M	6,2	6.00 x 10	205	524	239
V49	4.80 - 8	6	71 M	6,3	3.75 x 8	125	429	239
V49	5.70 - 8	6	77 M	5,2	4.50 x 8	156	470	239
V54	4.00 - 8	6	71 M	4,3	3.00D x 8	111	423	240
V54	4.00 - 8	8	75 M	6,0	3.00D - 8	111	423	240
V54	5.00 - 8	8	86 M	7,0	3.00D - 8	141	470	240
V54	5.00 - 8	10	89 M	8,5	3.50D - 8	146	470	240
V54	6.00 - 9	10	95 M	7,0	4.00E - 9	166	553	240
V71	16.5x 6.50 - 8	4	69 M	3,0	5.50A x 8	173	437	240
V71	16.5x 6.50 - 8	6	74 M	4,0	5.50A x 8	173	437	241

For the explanation of the symbols and abbreviations, see the inside of the last page.



SMALL TYRES FAST TRAILER

3.50 - 8 4 PR / 46 M TL V47

EAN	8714692081781	Nominal tyre pressure	2,5 bar
Tyre construction	Diagonaal	Section width	99 mm
Recommended rim width	2.50A x 8	Overall diameter	389 mm
		Load capacity at 130 km/h	170 kg
		EAN Tube	8714692285257

4.00 - 8 4 PR / 63 M TL V47

EAN	8714692081743	Nominal tyre pressure	3,5 bar
Tyre construction	Diagonaal	Section width	114 mm
Recommended rim width	2.50A x 8	Overall diameter	422 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	272 kg
		EAN Tube	8714692285264

4.00 - 8 6 PR / 70 M TL V47

EAN	8714692081934	Nominal tyre pressure	4,3 bar
Tyre construction	Diagonaal	Section width	114 mm
Recommended rim width	2.50A x 8	Overall diameter	422 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	335 kg
		EAN Tube	8714692285264

5.00 - 8 6 PR / 78 M TL V47

EAN	8714692082078	Nominal tyre pressure	5,0 bar
Tyre construction	Diagonaal	Section width	145 mm
Recommended rim width	3.00D x 8	Overall diameter	478 mm
		Load capacity at 130 km/h	425 kg
		EAN Tube	8714692285295

5.00 - 10 4 PR / 74 M TL V47

EAN	8714692082276	Nominal tyre pressure	3,5 bar
Tyre construction	Diagonaal	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	375 kg
		EAN Tube	8714692285349

5.00 - 10 6 PR / 80 M TL V47

EAN	8714692082283	Nominal tyre pressure	4,0 bar
Tyre construction	Diagonaal	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	450 kg
		EAN Tube	8714692285349

SMALL TYRES FAST TRAILER

5.00 - 10 8 PR / 84 M TL V47

EAN	8714692082337	Nominal tyre pressure	5,0 bar
Tyre construction	Diagonaal	Section width	146 mm
Recommended rim width	3.50B x 10	Overall diameter	525 mm
		Load capacity at 130 km/h	500 kg
		EAN Tube	8714692285349

18.5x8.5 - 8 6 PR / 78 M TL V48

EAN	8714692082405	Nominal tyre pressure	3,6 bar
Tyre construction	Diagonaal	Section width	220 mm
Recommended rim width	7.00 x 8	Overall diameter	475 mm
		Load capacity at 130 km/h	425 kg
		EAN Tube	8714692285318

18x8.0 - 10 8 PR / 98 M TL V48

EAN	8714692082399	Nominal tyre pressure	6,0 bar
Tyre construction	Diagonaal	Section width	188 mm
Recommended rim width	6.00 x 10	Overall diameter	462 mm
		Load capacity at 130 km/h	750 kg

20.5x8.0 - 10 10 PR / 96 M TL V48

EAN	8714692082375	Nominal tyre pressure	6,2 bar
Tyre construction	Diagonaal	Section width	205 mm
Recommended rim width	6.00 x 10	Overall diameter	524 mm
		Load capacity at 130 km/h	710 kg

4.80 - 8 6 PR / 71 M TL V49

EAN	8714692082429	Nominal tyre pressure	6,3 bar
Tyre construction	Diagonaal	Section width	125 mm
Recommended rim width	3.75 x 8	Overall diameter	429 mm
Permitted rim width	3.00D x 8	Load capacity at 130 km/h	345 kg
		EAN Tube	8714692285271

5.70 - 8 6 PR / 77 M TL V49

EAN	8714692082412	Nominal tyre pressure	5,2 bar
Tyre construction	Diagonaal	Section width	156 mm
Recommended rim width	4.50 x 8	Overall diameter	470 mm
Permitted rim width	3.75 x 8, 3.50D x 8	Load capacity at 130 km/h	415 kg



SMALL TYRES FAST TRAILER

4.00 - 8 6 PR / 71 M TL V54

EAN	8714692081941	Nominal tyre pressure	4,3 bar
Tyre construction	Diagonaal	Section width	111 mm
Recommended rim width	3.00D x 8	Overall diameter	423 mm
Permitted rim width	2.50A x 8	Load capacity at 130 km/h	345 kg
		EAN Tube	8714692285264

4.00 - 8 8 PR / 75 M TT V54

EAN	8714692081972	Nominal tyre pressure	6,0 bar
Tyre construction	Diagonaal	Section width	111 mm
Recommended rim width	3.00D - 8	Overall diameter	423 mm
Permitted rim width	2.50A x 8	Load capacity at 130 km/h	387 kg
		EAN Tube	8714692285271

5.00 - 8 8 PR / 86 M TT V54

EAN	8714692082023	Nominal tyre pressure	7,0 bar
Tyre construction	Diagonaal	Section width	141 mm
Recommended rim width	3.00D - 8	Overall diameter	470 mm
Permitted rim width	3.00D x 8, 3.50D - 8	Load capacity at 130 km/h	530 kg
		EAN Tube	8714692285295

5.00 - 8 10 PR / 89 M TT V54

EAN	8714692082030	Nominal tyre pressure	8,5 bar
Tyre construction	Diagonaal	Section width	146 mm
Recommended rim width	3.50D - 8	Overall diameter	470 mm
		Load capacity at 130 km/h	580 kg
		EAN Tube	8714692285295

6.00 - 9 10 PR / 95 M TT V54

EAN	8714692082214	Nominal tyre pressure	7,0 bar
Tyre construction	Diagonaal	Section width	166 mm
Recommended rim width	4.00E - 9	Overall diameter	553 mm
		Load capacity at 130 km/h	690 kg
		EAN Tube	8714692285332

16.5x6.5 - 8 4 PR / 69 M TL V71

EAN	8714692082290	Nominal tyre pressure	3,0 bar
Tyre construction	Diagonaal	Section width	173 mm
Recommended rim width	5.50A x 8	Overall diameter	437 mm
		Load capacity at 130 km/h	325 kg
		EAN Tube	8714692285301

SMALL TYRES FAST TRAILER

16.5x6.5 - 8 6 PR / 74 M TL V71			
EAN	8714692082092	Nominal tyre pressure	4,0 bar
Tyre construction	Diagonaal	Section width	173 mm
Recommended rim width	5.50A x 8	Overall diameter	437 mm
		Load capacity at 130 km/h	375 kg
		EAN Tube	8714692285301





TECHNICAL INFORMATION AND TUBES

TECHNICAL INFORMATION AND TUBES	Pag.
General texts for the graphs and tables	243
Service description	243
Instructions for use of load capacity graphs	244
Tubes	246
Valves	247
Rim and wheel discs	248
Recommendations to extend the life-span	250
Determining gear ratio, rolling circumference and front wheel lead	252
Fitting instructions	255
Weight transfer	256
Names	256

GENERAL TEXTS FOR THE GRAPHS AND TABLES

1. It is recommended not to exceed the maximum tyre pressures shown in the tables and graphs.

2. The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use.

3. When mounting tubeless tractor tyres, we recommend a TR618A valve.

4. Inner tubes for implement tyres are fitted with TR15 valve, with the exception of 560/60-22.5, 600/55-22.5 and 710/45-22.5. The tubes have a TR218A valve.
5. These specifications may be subject to change without notice.

6. TL = Tubeless. TT = Tube type.

7. 100 kPa = 1.0 bar.
100 kPa = 14.50 PSI.

8. SRI = The Speed Radius Index (SRI) is by convention a parameter used exclusively for the calculation of the theoretical speed of tractors during European Union homologation procedures and for interchangeability of different tyre sizes

SERVICE DESCRIPTION

LI = (Load index) *

Li	Kg	Li	Kg	Li	Kg	Li	Kg	Li	Kg	Li	Kg	Li	Kg
45	165	68	315	91	615	114	1180	137	2300	160	4500	183	8750
46	170	69	325	92	630	115	1215	138	2360	161	4625	184	9000
47	175	70	335	93	650	116	1250	139	2430	162	4750	185	9250
48	180	71	345	94	670	117	1285	140	2500	163	4875	186	9500
49	185	72	355	95	690	118	1320	141	2575	164	5000	187	9750
50	190	73	365	96	710	119	1360	142	2650	165	5150	188	10000
51	195	74	375	97	730	120	1400	143	2725	166	5300	189	10300
52	200	75	387	98	750	121	1450	144	2800	167	5450	190	10600
53	206	76	400	99	775	122	1500	145	2900	168	5600	191	10900
54	212	77	412	100	800	123	1550	146	3000	169	5800	192	11200
55	218	78	425	101	825	124	1600	147	3075	170	6000	193	11500
56	224	79	437	102	850	125	1650	148	3150	171	6150	194	11800
57	230	80	450	103	875	126	1700	149	3250	172	6300	195	12150
58	236	81	462	104	900	127	1750	150	3350	173	6500	196	12500
59	243	82	475	105	925	128	1800	151	3450	174	6700	197	12850
60	250	83	487	106	950	129	1850	152	3550	175	6900	198	13200
61	257	84	500	107	975	130	1900	153	3650	176	7100	199	13600
62	265	85	515	108	1000	131	1950	154	3750	177	7300		
63	272	86	530	109	1030	132	2000	155	3875	178	7500		
64	280	87	545	110	1060	133	2060	156	4000	179	7750		
65	290	88	560	111	1090	134	2120	157	4125	180	8000		
66	300	89	580	112	1120	135	2180	158	4250	181	8250		
67	307	90	600	113	1150	136	2240	159	4375	182	8500		

* Applies to maximum speed as indicated by the Speed Symbol.



TECHNICAL INFORMATION AND TUBES

Speed Symbols

Category	Max. speed in km/h
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50

Category	Max. speed in km/h
C	60
D	65
E	70
F	80
G	90
H	100
I	110
J	120
M	130

INSTRUCTIONS FOR USE OF LOAD CAPACITY GRAPHS

Tyres with the speed symbols A6, A8 or D can be used at higher speeds if the load is reduced. The load capacity charts indicate the maximum speed with the corresponding load capacity. Tractor tyres with speed symbol A8/B are subject to a maximum permitted speed of 50 km/h.

IMPLEMENT TYRES

Low Load Variation (LLV) and High Load Variation (HLV)

In the case of cross-ply implement tyres a distinction should be made between applications in which the load per tyre fluctuates greatly and applications in which the load per tyre is more or less constant. If the load varies by a factor of 2 or more between the laden and non-laden state, we speak of High Load Variation. Where the differences are smaller, we speak of Low Load Variation. For HLV applications, the load capacity per tyre may be increased by 20%, while the tyre pressure must be increased. This distinction is indicated in the graphs. Examples of HLV applications are selfloading trailers and muck spreaders. Examples of LLV applications are tillage machines and towed mowing machines.

Driven/non-driven wheels

If implement tyres are driven, the load capacity is 70% of the value stated in the graph concerned or 12 load index points less than for towed applications. This does not apply to the Flotation Trac, Flotation Pro and the Endurion Trailer, which have the same load capacity whether used in driven or non-driven applications.

Tandem axles

Where implement tyres are fitted on rigid tandem axles, extra lateral forces occur during sharp turns on the road. For that reason we advise maintaining a reserve of 20% for the necessary load capacity of tyres on rigid tandem axles.

Ply rating and service description

Cross-ply implement tyres are given a ply rating or load index/speed symbol (service description). The load index for Bias implement tyres relates to the load capacity under LLV conditions.

TRACTOR TYRES

Double fitting

If driven wheels are fitted as twinned wheels, the load capacity per tyre is equal to that of one in single fitting, reduced by 12%.


Agricultural work with a high drive torque

If during work, such as ploughing, a high drive torque is required of the tyres, the load capacity with the same tyre pressure will be reduced. The H.T. (High Traction) line for these applications applies to all usual field speeds.


Transport work

For intensive road transport at more than 30 km/h, the tyre pressure of radial tractor tyres should be increased by 0,4 bar.

A distinction is made between the load capacities with drive and non-driven (free) applications. The symbols for this are:



Drive
application



Non-driven
application





TECHNICAL INFORMATION AND TUBES

TUBES

Drive wheels

Tube size	Valve
11.2-24 12.4-24, 320/85-24 13.6-24, 340/85-24, 380/70-24, 440/65-24 14.9-24, 380/85-24, 420/70-24, 480/65-24	TR 218
11.2-28 12.4-28, 320/85-28 13.6-28, 340/85-28, 380/70-28 14.9-28, 380/85-28, 420/70-28, 480/65-28 16.9-28, 420/85-28, 480/70-28, 540/65-28	TR 218
16.9-30, 420/85-30, 480/70-30, 540/65-30	TR 218
12.4-32	TR 218
16.9-34, 420/85-34 18.4-34, 460/85-34, 520/70-34, 600/65-34	TR 218
12.4-36 13.6-36	TR 218
13.6-38 16.9-38, 420/85-38, 480/70-38, 540/65-38 18.4-38, 460/85-38, 520/70-38, 600/65-38 20.8-38, 520/85-38, 580/70-38, 650/65-38	TR 218

Agricultural and horticultural machinery

Tube size	Valve
200x50, 2.00-4 260x85 / 3.00-4 4.00-4, 4.10/3.50-4	TR 87
3.50-6, 4.10/3.50-6 15x6.00-6, 160/65-6	TR 13 / TR 87 TR 13
2.25-8 3.00-8, 3.50-8 4.00-8, 4.80-8 5.00-8 170/60-8, 16.5x6.5-8 18x8.50-8, 210/60-8	V1.04.01* TR 13 TR 13 / TR 87 TR 13 / TR 87 TR 13 TR 13
6.00-9	TR 15 / TR 87
5.00-10	TR 13
4.00-12, 3.50-12	TR 13
200/60-14.5	TR 15

* ETRTO No.


Implement and non-driven steering wheels

Tube size	Valve
7.00-12 10.0/80-12	TR 15
10.0/75-15.3, 260/70-15.3 11.5/80-15.3, 300/80-15.3 12.5/80-15.3	TR 15
400/60-15.5	TR 15
4.50-16, 5.00-16 5.50-16, 6.00-16 6.50-16, 7.00-16 7.50-16 9.00-16 10.00-16 11.00-16 13.0/75-16	TR 15
13.5/75-430.9	TR 15
15.0/55-17, 380/55-17 19.0/45-17, 480/45-17 500/50-17	TR 15
7.50-18 12.5/80-18 15.0/70-18	TR 15
6.00-19	TR 15
7.50-20 9.00-20 10.00-20 11.00-20	TR 15 V3-06-05* V3-06-05* V3-06-05*
560/60-22.5 600/55-22.5 710/45-22.5	TR 218

VALVES

Description	TRA No.	DIN No.	ETRTO no.	Dimensions (mm)			Valve hole ø	Bend angle	MTB bar
				A	B	ø D			
Tube valve (1)	TR 13	38 G 11.5	V2-01-1	38	57	11.6	11.3	0°	5,00
	TR 15	38 G 16	V2-01-2	38	57	16.5	15.7	0°	5,00
	TR 150	93 G 16	V3-10-1	93	57	15.7	15.7	0°	7,00
Tubeless valve (2)	TR 412	43 GS 11.5 43 GS 16	V2-03-6	33	19.5	15	11.3	0°	4,50
	TR 413		V2-03-1	42.5	19.5	15	11.3	0°	4,75
	TR 415		V2-03-3	42.5	24	19.2	15.7	0°	4,50
Liquid filling valve (3)	TR 218 A	47 GW	V4-03-01	47.5	63.5*	16.2	15.7	0°	10,50
Metal valve (4)	TR 87	33 G 90	V1-08-1	17	33	10	10.2	90°	10,50
Metal tubeless valve (5)	TR 416 S	50 MSW	V2-05-1	36.5	17	8	11.3	0°	14,00
	TR 416		V2-05-2	36.5	17	8	15.7	0°	14,00
	TR 618 A		V5-01-1	51	22.5		15.7	0°	14,00
Triple bend screw-on universal valve (6)		V3-06-5							

MTB = Maximum permissible tyre pressure

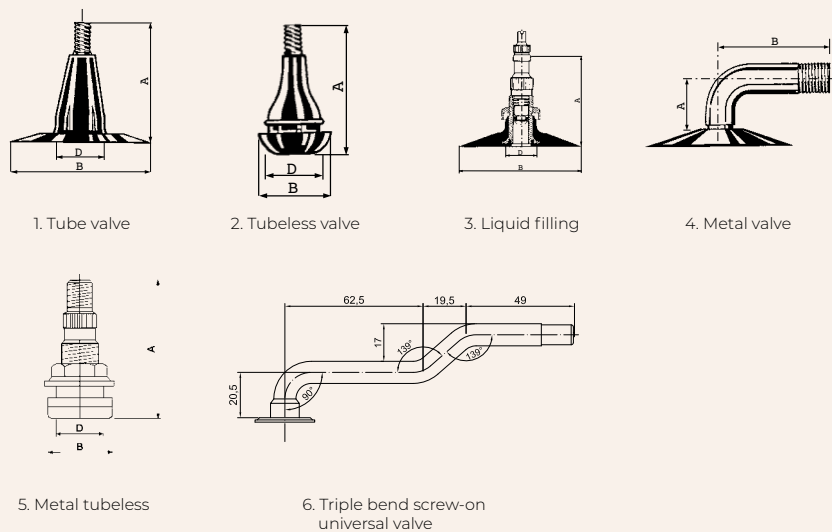



TECHNICAL INFORMATION AND TUBES

RIM AND WHEEL DISCS


A wheel is made up of a rim and a wheel disc that are fixed to or detachable from each other and must exactly match. The rim size is of crucial importance to the tyre/rim combination.

Size designations of rims

Two wheels are shown here with the associated meanings of the size indications.

Rim choice


When using tubeless tyres, tubeless rims should also be used. A protective flap must always be used when combining inner tubes with multi-piece rims. This prevents damage to the inner tube.



Single rim	Multi-piece rim
4.00 E x 16	13 - 508
This means: 4.00 = rim width code (inches) E = rim flange height x = one piece rim 16 = rim diameter code (inches)	This means: 13 = rim width code (inches) - = multi-piece rim 508 = rim diameter code (mm)

The most important size indications of wheel discs are the following:

- G = diameter of the central hole
- S = pitch circle diameter of the stud holes and number of stud holes
- N = diameter cleat circle and number of cleats
- D = diameter stud hole and stud hole shape
- E = extra stud holes in case of double fitting
- B = outside diameter disc.



"Small" overall diameter		"Large" overall diameter	
Rim diameter code	Rim diameter (mm)	Rim diameter code	Rim diameter (mm)
430.9 mm	430.9	17	436.6
15	380.2	15.3	388.3
508 mm	508	20	512.8


Warning

The diameter of different rim sizes may look very similar, but they're not equal as you can see in the table.

Always use the rim stipulated

If you use a rim which is too narrow, the tread will be convex and, as is the case where tyre pressure is too high, there will be excessive wear of the centre of the tread.

The fitting of a tyre to the wrong rim can lead to highly dangerous consequences! Fitting a "large" tyre (e.g. 10.0/75-15.3) on a smaller rim (i.e. rim size code 15) is dangerous. The tyre is loose-fitting and in extreme conditions can "blow-off" the ring. Rimchafing can be the consequence. Fitting a "smaller" tyre on a rim which is too large in overall diameter can also be dangerous! As the bead diameter of the tyre is smaller than the base rimflange diameter, by inflating the tyre, the chances of the bead breaking and the tyre exploding are high.

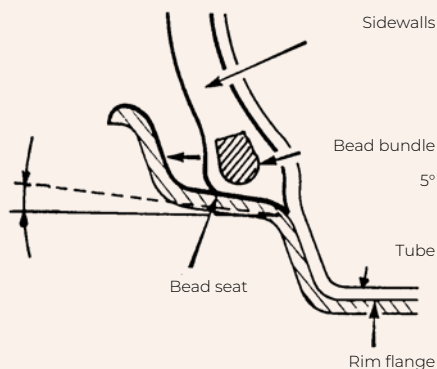



TECHNICAL INFORMATION AND TUBES

RECOMMENDATIONS TO EXTEND THE LIFE-SPAN

Tyre pressure

Correct inflation pressure is important for performance, durability, comfort and traction. It is of crucial importance for the life expectancy of your tyres that you adjust the tyre pressure according to usage and check it regularly. To ensure accurate measurement, the pressure gauge must be calibrated once a year. Measurement of tyre inflation pressure must be done when the tyres are cold. If the pressure in a warm tyre is correct, then it would be too low when the tyre has cooled.

Inflation pressure too low

Under-inflation can reduce the life-span due to:

- damaged carcass cord plies, which can render the tyre unusable;
- increased wear;
- carcass damage close to the bead.

Road use and operation in the field

These two kinds of use require different tyre inflation pressures. Allowance has been made for this in the tyre pressure graphs. Radial and cross-ply tyres must not be used on the same axle, as this can lead to unstable handling.

Visual check

Tyres must be checked regularly for damage. Incision damage can be particularly harmful to the cord tissue layers of the tread.

Oil and grease

To avoid damage to the rubber, tyres should not come into contact with oil and grease.

Frost protection

To protect against frost when water ballasting, sufficient calcium chloride should be added. Please consult your supplier of calcium chloride about the right ratio.

Slippage of the tyre

The following can increase the likelihood of slippage of the tyre on the rim:

- tyre pressure too low;
- faulty fitting of the tyre bead on the rim;
- over use of lubricant when fitting tyre;
- wrong rim size.


The minimum tyre pressure for high-traction work (e.g. ploughing) is 80 kPa when using an inner tube. A lower pressure increases the chances of the tyre turning on the rim and tearing off the valve.

Direction of steering wheels on four wheel drive tractors

When fitting or changing tyres ensure that the directional arrow on the sidewall is pointing forward.

It is possible to fit the front tyres in such a way that the tread turns against the direction of rotation on four wheel drive tractors that are primarily used for transport activities. This will extend the life-span of the tyres. Such fitting is not recommended for field activities as it reduces the traction and self-cleaning properties.

Transport instructions

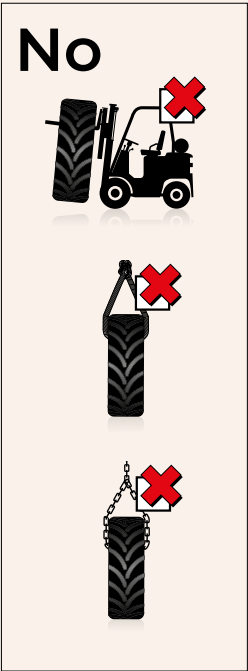



TECHNICAL INFORMATION AND TUBES


DETERMINING GEAR RATIO, ROLLING CIRCUMFERENCE AND FRONT WHEEL LEAD

There is a close relationship between the measurements of the front and rear tyres on four-wheel drive tractors. To get the most from the four wheel drive, the ground speed of the front tyres must be greater than that of the rear tyres - the so-called front wheel lead. With tractors, it is normally stated which tyres can be fitted as standard. A range of sizes is often possible with a certain tractor type, within the borders of a correct front wheel lead.

To optimally exploit the four wheel drive of a tractor, the value of the front wheel lead should be between +1% and +5% (ground speed front tyres > ground speed rear tyres). The permitted front wheel lead value is between 0% and +6%. A front wheel lead below 0% or above +6% can have a negative influence on the tractor's performance and steering (especially on corners), cause excessive wear of the front and rear tyres and premature wear of the gears.

The relationship between the revolutions of the front and rear axles on a mechanical four wheel drive is fixed. This relationship is the gear ratio, which is usually between 1.20 and 1.50, depending on the brand and type of tractor.

The exact mechanical gear ratio is given in the manual of every tractor. The following method can also be used to determine the figure. In addition, there is an explanation of how to determine the rolling circumference of a tyre and the aforementioned front wheel lead.

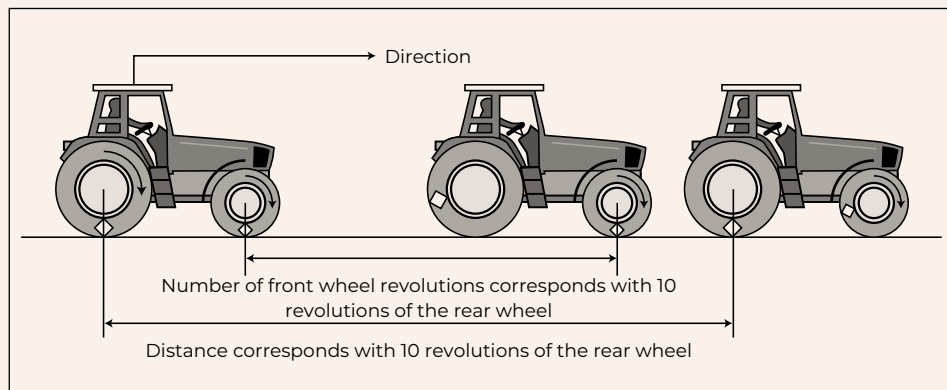

Determining the rolling circumference of a tyre

Take the measurements on a smooth and hard surface as follows:

1. Switch off the 4WD (the front and rear wheels have to turn independently).
2. Mark the sidewall of a front and rear tyre in the centre of the contact area between tyre and surface.
3. Mark the surface at the point where the centre of the contact area of both the front and rear tyres meets that surface (i.e. the point of the marking on the tyres).
4. Drive the tractor in a straight line until the front wheel has made exactly 10 revolutions and mark the surface where the middle of the contact area of the tyre meets the ground (i.e. the point where the marking on the front tyre is after precisely 10 revolutions).
5. Repeat the process for the rear wheel (i.e. make and mark 10 revolutions).
6. Measure the distance between the markings of the start and finishing point of 10 revolutions of the front and rear wheels.
7. Calculate the rolling circumference of the front and rear tyres as follows:

Rolling circumference front (in mm)

= distance covered by front wheel /
number of revolutions


Rolling circumference rear (in mm) =
distance covered by rear wheel / number
of revolutions

Determining the front wheel lead

The following conditions are required to measure the front wheel lead: The tractor must be fitted with the standard front ballast and the tyres set to a nominal pressure. At least 60 metres of clear road is necessary.

To determine the front wheel lead:

1. Switch off the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Repeat the measuring with the 4WD switched on.
5. Calculate the front wheel lead by dividing the number of front wheel revolutions with the 4WD switched on by the number when switched off.

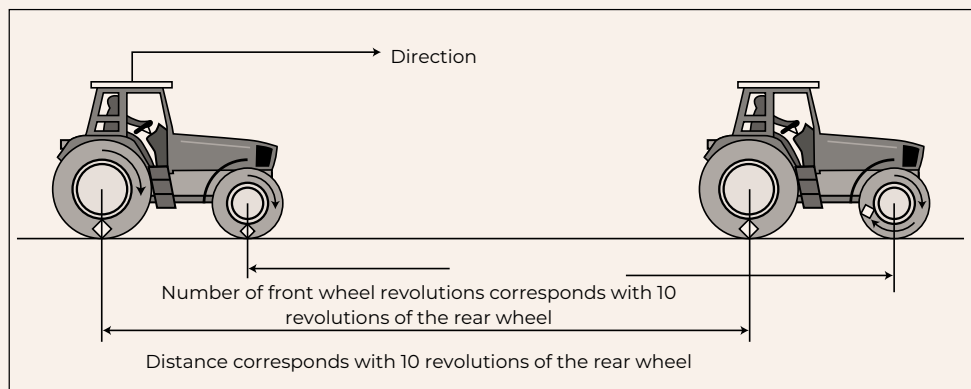



TECHNICAL INFORMATION

AND TUBES

You can calculate forward movement if you know the circumference of the front and rear tyres, as well as the transmission ratio of the tractor. Use the formula given below:

$$\% \text{ front wheel lead} = \frac{\text{Front tyre rolling circumference} \times \text{gear ratio}}{\text{Rear tyre rolling circumference}} - 1 \times 100\%$$

Determining the gear ratio

To determine the gear ratio:

1. Switch on the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Calculate the gear ratio by dividing the number of front wheel revolutions by the number of rear wheel revolutions, e.g.:

$$\text{Gear ratio} = \frac{\text{Number of front wheel revolutions}}{\text{Number of rear wheel revolutions}}$$

FITTING INSTRUCTIONS

Pay attention to the following safety regulations and legal requirements when fitting agricultural tyres:

1. Only use the recommended rims.
2. Check that the rims are in good condition (rust-free, no bent rim flange, etc.).
3. Put lubricant on the tyre beads and rim.
4. Always use new Vredestein inner tubes of corresponding size when fitting new tube type tyres.
5. Secure the wheel during inflation, preferably in a proper safety cage.
6. Only use an air hose with a pressure gauge that is fitted at a sufficiently safe distance from the valve connection.
7. Never pump the tyres higher than 250 or 300 kPa when fitting, as indicated on the side of the tyre.
8. If the beads do not appear to be properly seated on the rim flange after fitting, do not try and correct this by inflating above 250 kPa. Deflate the tyre, re-centre the beads and reinflate.
9. The tyre pressure should match the prescribed values based upon the maximum load, maximum speed and working conditions. Use the Vredestein load capacity chart/tyre pressure table for reference.

2,5 bar MAX





TECHNICAL INFORMATION AND TUBES

WEIGHT TRANSFER

The weight distribution between the front and rear axles is crucial to how a tractor drives and steers. Attaching implements and/or trailers can alter the weight distribution. Proper weight distribution ensures optimal pulling power is provided by the driven wheels, which have maximum grip when they are used at full load with the appropriate tyre pressure.

Always make sure at least 20% of the total weight of the tractor continues to rest on the front axle in order to keep the tractor under control.


Excessive loading causes:

- overloading of the tyres, resulting in more wear and possible carcass defects
- increased rolling resistance, resulting in reduced traction and extra fuel consumption
- ruts in the field
- higher soil compaction, resulting in damage to the soil and reduced yields.

Insufficient loading causes:

- more slip, resulting in reduced traction power and more damage to the soil
- higher fuel consumption
- rapid tyre wear
- poor steering.

NAMES

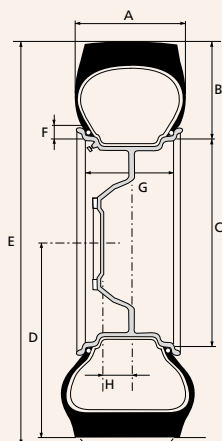

- A : Section width
- B : Section height
- C : Rim diameter
- D : Static loaded radius
- E : Overall diameter
- F : Rim bead height
- G : Rim width
- H : Offset



520/85 R 42 155 A8/B TL

520	=	Nominal section width (in mm)(in mm)
85	=	Aspect ratio in %
R	=	Radial construction
42	=	Rim diameter code (in inches)
155 A8/B	=	Maximum 4125 kg at 40-50 km/h
TL	=	Tubeless



16.9-30 8 PR 137 A8 TT

16.9	=	Nominal section width(in inches)
-	=	Bias construction
30	=	Rim diameter code (in inches)
8PR	=	Carcass strength
137 A8	=	Maximum 2300 kg at 40 km/h
TT	=	Tube type



10.00 - 16 8PR TT

10.00	=	Nominal section width (in inches)
-	=	Bias construction
16	=	Rim diameter code (in inches)
8PR	=	Aanduiding voor karkassterkte
TT	=	Tube type



710/50 R 26.5 170D TL

710	=	Nominal section width (in mm)
50	=	Aspect ratio in %
R	=	Radial construction
26.5	=	Rim diameter code (in inches)
170 D	=	Maximum 6000 kg at 65 km/h
TL	=	Tubeless



13.5/75 - 430.9 14PR TL

13.5	=	Nominal section width (in inches)
75	=	Aspect ratio in %
-	=	Bias construction
430.9	=	Rim diameter code (in mm)
14 PR	=	Carcass strength
TL	=	Tubeless



18 x 8.50 - 8 6PR TL

18	=	Nominal tyre diameter (in inches)
8.50	=	Nominal section width (in inches)
-	=	Bias construction
8	=	Rim diameter code (in inches)
6PR	=	Carcass strength
TL	=	Tubeless



NOTES

GENERAL REMARKS

	The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use.
	These specifications may be subject to change without notice. No liability accepted for errors or misprints.
	It is recommended not to exceed the maximum tyre pressures shown in the tables.
	1 bar = 100 kPa = 14,5 psi
	A6 = 30 km/h; A8 = 40 km/h; A8/B = 40/50 km/h; D = 65 km/h
	TL = Tubeless; TT = Tube Type
	"Tread depth (including tie bar)" means the tread depth on top of the tie bar, with the height of the tie bar added.
	For radial tractor drive tyres applies: For intensive transport activities at more than 30 km/h, the tyre pressure should be increased by 0,4 bar.
	For radial tractor drive tyres applies: When working on slopes over 20%, the tyre pressure should be increased by 0,4 bar.

SYMBOLS AND ABBREVIATIONS

SRI	Speed Radius Index
VF	Very High Flexion
NRO	Narrow Rim Option. The NRO marking allows the use of a narrower rim width than normally permitted by ETRTO standards for either IF or VF tyres of the same size. When using NRO rim, the tyre pressure should be increased by 0,2 bar.
	Section width (mm), a tolerance of $\pm 2\%$ applies
	Overall diameter (mm), a tolerance of $\pm 2\%$ applies
	Static loaded radius (mm), a tolerance of $\pm 2\%$ applies
	Rolling circumference (mm), a tolerance of $\pm 2\%$ applies
	Rim width and contour
	Non-driven / trailed / free-rolling application
	Driven application
10C	Cyclic field activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies.
10Ci	Cyclic activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 600 meter.
10H	Field activities where high torque is required at maximum 10 km/h.
10L	Activities where low torque is required at maximum 10 km/h.
15C	Cyclic field activities at low torque up to 15 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies.
#	Consult Apollo Vredestein for this rim width.
*	Calculated value.
**	In case these tyres are driven, 70% of the load capacity in non-driven application applies.
***	When fitted on free-rolling steering wheels of self propelled agricultural equipment, tyre load capacities are 80% of the loads for free-rolling applications.

**FOR THE REMARKS AND THE
EXPLANATION OF ABBREVIATIONS,
SEE OTHER SIDE OF THIS FLAP.**

VREDESTEIN AGRICULTURAL TYRES TECHNICAL DATA

2024

Apollo Tyres (UK) Sales Ltd. | 1 Beechwood, Cherry Hall Road
Kettering Business Park | NN14 1UE Kettering | United Kingdom
+44 (0)330 333 1294 | customer.uk@apolloytyres.com | www.vredestein.uk

Apollo Tyres (Nordic) AB | Flöjelbergsgatan 18, 431 37 Mölndal | Sweden
+47 81 50 30 27 | customer.se@apolloytyres.com, customer.no@apolloytyres.com
www.vredestein.se, www.vredestein.no

Apollo Tyres (Germany) GmbH | Rheinstraße 103 | P.O. Box 1370, 56173 Vallendar | Germany
+45 8987 1002 | customer.dk@apolloytyres.com | www.vredestein.dk

Apollo Tyres (Polska) Sp. Z.o.o. | Ul. Prosta 32, 00-838 Warsaw | Poland
+48 22 886 81 00 | customer.pl@apolloytyres.com | www.vredestein.pl

Apollo Tyres (Hungary) Sales Kft. | Alkotás út 39/c, 1123 Budapest | Hungary
+36 1 379 5433 / 379 5434 | customer.hu@apolloytyres.com | www.vredestein.hu

Apollo Tyres (Europe) B.V. | Ir. E.L.C. Schiffstraat 370, 7547 RD Enschede | Netherlands
+31 (0)53 488 8777 | customer.nl@apolloytyres.com | www.vredestein.nl

For other Vredestein sales offices or importers see www.vredestein.com

VREDESTEIN
TYRES